

# ITV5432 30A Series

## Surface Mount



### Agency Approvals

| Agency | Agency File Number | Ampere Range |
|--------|--------------------|--------------|
| cULUS  | E10480             | 30 A         |
| △      | TA 50461285        | 30 A         |

### Thermal Derating Characteristics

|                             | Ambient Operating Temperature |      |      |
|-----------------------------|-------------------------------|------|------|
|                             | 25°C                          | 40°C | 60°C |
| Recommend Rated Current (A) | 34.0                          | 30.0 | 25.0 |

## Description

ITV5432 Series is a chip type surface mountable device that can protect against both overcurrent and overcharging. It comprises a fuse element to ensure stable operation under normal electrical current and to cut off the current when overcurrent occurs. It also comprises a resistive heating element that could be used in combination with a voltage detecting means, such as IC and FET. When overvoltage is detected, the heating element is electrically excited to generate heat to blow the fuse element to achieve overvoltage protection.

## Features

- Halogen Free
- Surface Mount
- Fast response
- Protection for both overcurrent and overcharging

## Applications

- Vacuum cleaner
- Power tools
- E-scooter
- E-bike
- UPS

## Electrical Characteristics

| Part Number  | Ordering Code  | I <sub>rated</sub> (A) | Cells in Series | V <sub>max</sub> (Vdc) | I <sub>break</sub> (A) | V <sub>OP</sub> (V) | Resistance              |                        | Agency Approvals |   |
|--------------|----------------|------------------------|-----------------|------------------------|------------------------|---------------------|-------------------------|------------------------|------------------|---|
|              |                |                        |                 |                        |                        |                     | R <sub>heater</sub> (Ω) | R <sub>fuse</sub> (mΩ) | cULUS            | △ |
| ITV5432L0630 | ITV5432L0630WR | 30                     | 2               | 62                     | 80                     | 7.5 ~ 9.6           | 2.3 ~ 4.0               | 0.5 ~ 2.5              | X                | X |
| ITV5432L1230 | ITV5432L1230WR | 30                     | 3               | 62                     | 80                     | 9.9~13.5            | 4.5 ~ 7.3               | 0.5 ~ 2.5              | X                | X |
| ITV5432L1430 | ITV5432L1430WR | 30                     | 4               | 62                     | 80                     | 13.4 ~ 18.4         | 8.4 ~ 13.3              | 0.5 ~ 2.5              | X                | X |
| ITV5432L2030 | ITV5432L2030WR | 30                     | 5               | 62                     | 80                     | 17.1 ~ 23.5         | 13.8 ~ 21.7             | 0.5 ~ 2.5              | X                | X |
| ITV5432L3030 | ITV5432L3030WR | 30                     | 7               | 62                     | 80                     | 23.0 ~ 31.5         | 24.6 ~ 39.3             | 0.5 ~ 2.5              | X                | X |
| ITV5432L4030 | ITV5432L4030WR | 30                     | 9~10            | 62                     | 80                     | 34.2 ~ 46.9         | 64.0 ~ 87.0             | 0.5 ~ 2.5              | X                | X |
| ITV5432L5030 | ITV5432L5030WR | 30                     | 12~14           | 62                     | 80                     | 45.2 ~ 62.0         | 100.0 ~ 152.0           | 0.5 ~ 2.5              | X                | X |

Current Capacity 100% x I<sub>rated</sub>, No Melting

Cut Time 200% x I<sub>rated</sub>, < 1 min

Interrupting Current 100 A, power on 5 ms, power off 995 ms, 10000 cycles, No Melting

Over Voltage Operation In operation voltage range, the fusing time is <1min.

#### Notes:

I<sub>rated</sub> = Current carrying capacity that is measured at 40°C thermal equilibrium condition

I<sub>break</sub> = The current that the fuse element is able to interrupt

V<sub>max</sub> = The maximum voltage that can be cut off by fuse

V<sub>OP</sub> = Range of operation voltage

R<sub>heater</sub> = The resistance of the heating element

R<sub>fuse</sub> = The resistance of the fuse element

Cells in series = Number of battery cells connected in series in the circuit for ITV device to protect.

• Value specified is determined by using the PWB with 29.4mm\*2oz copper traces, AWG10 covered wire, and 0.6mm glass epoxy PCB.


• Specifications are subject to change without notice.

# ITV5432 30A Series


## Surface Mount

### Cut Time by Heater Operation

Various heater wattage at 25°C ambient temperature

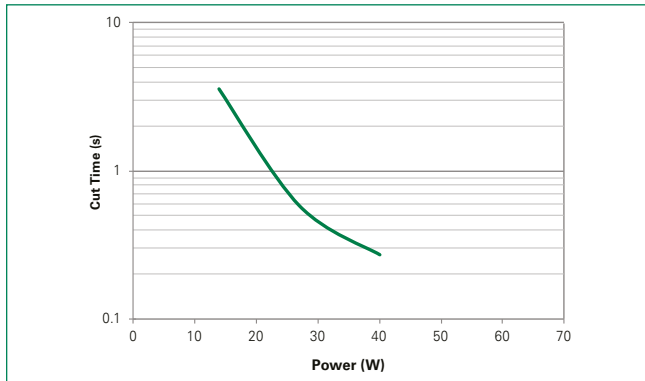


Constant heater wattage at various ambient temperature

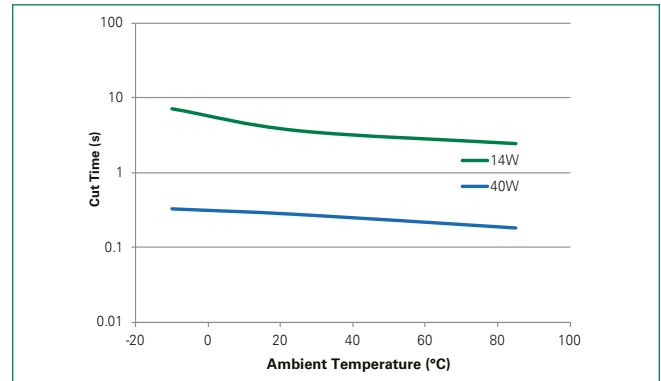


### Cut Time by Current Operation

Various interrupting current at 25°C ambient temperature

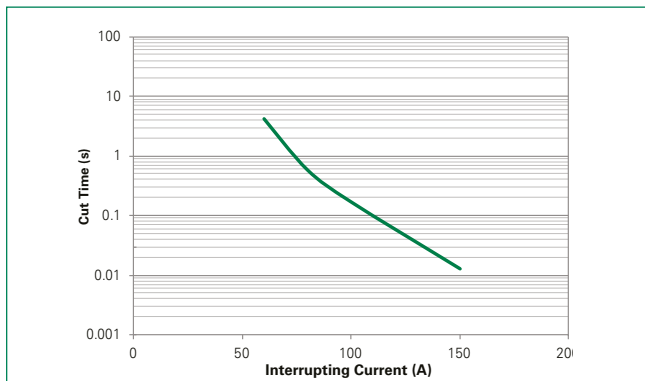

Constant 2x rated current at various ambient temperature

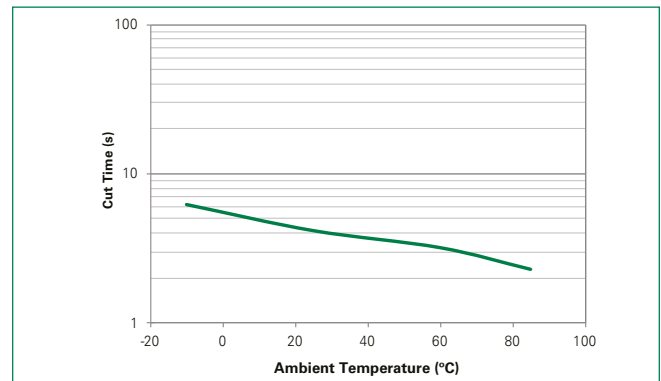


### Environmental Specifications

|                              |                                                                                                   |
|------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Storage Temperature</b>   | 0~35°C, ≤70%RH<br>Shelf life: 1 year                                                              |
| <b>Operating Temperature</b> | -10°C to +65°C                                                                                    |
| <b>Hot Passive Aging</b>     | 100±5°C, 250 hours<br>No structural damage and functional failure                                 |
| <b>Humidity Aging</b>        | 60°C±2°C, 90~95% R.H. 250 hours<br>No structural damage and functional failure                    |
| <b>Cold Passive Aging</b>    | -20±3°C, 500 hours<br>No structural damage and functional failure                                 |
| <b>Thermal Shock</b>         | MIL-STD-202 Method 107G<br>+125°C/-55°C, 100 times<br>No structural damage and functional failure |


# ITV5432 30A Series

## Surface Mount


Physical Dimension (mm)

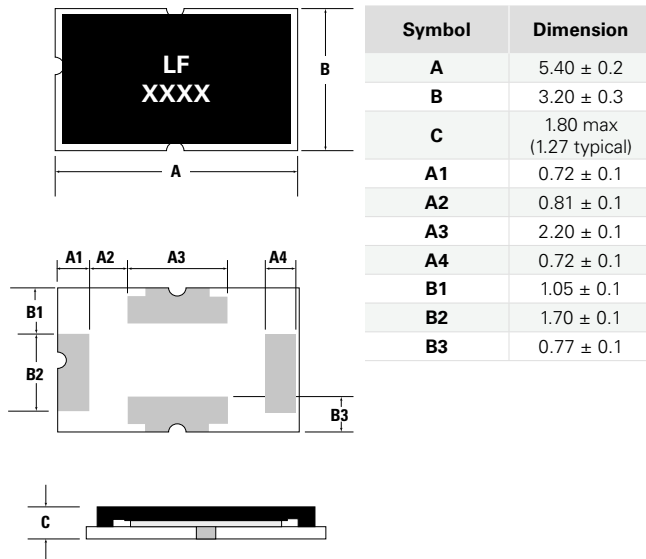

Device Circuit

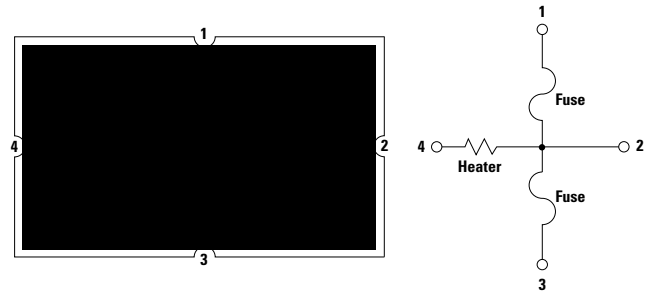

Board and Solder Layout Recommend (mm)

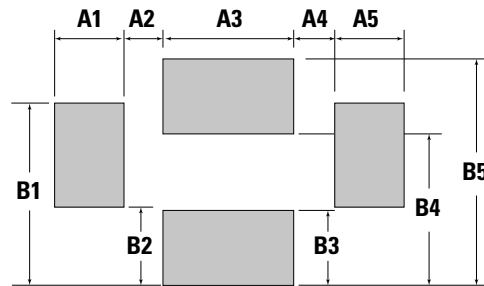


Physical Specifications

|                  |                 |
|------------------|-----------------|
| Material         | Glass Epoxy PCB |
| Base Thickness   | 0.6mm           |
| Copper Thickness | 0.07mm          |
| Covered Wire     | AWG10           |

| Symbol | Dimension  |
|--------|------------|
| A1     | 1.25 ± 0.1 |
| A2     | 0.75 ± 0.1 |
| A3     | 2.40 ± 0.1 |
| A4     | 0.75 ± 0.1 |
| A5     | 1.25 ± 0.1 |
| B1     | 3.35 ± 0.1 |
| B2     | 1.45 ± 0.1 |
| B3     | 1.40 ± 0.1 |
| B4     | 2.80 ± 0.1 |
| B5     | 4.20 ± 0.1 |

## Soldering Parameters

|                                                      |                                       |                 |
|------------------------------------------------------|---------------------------------------|-----------------|
| Average Ramp-Up Rate ( $T_{S(max)}$ to $T_P$ )       |                                       | 3°C/second max. |
| Preheat                                              | Temperature Min ( $T_{S(min)}$ )      | 150°C           |
|                                                      | Temperature Max ( $T_{S(max)}$ )      | 200°C           |
|                                                      | Time ( $T_{S(min)}$ to $T_{S(max)}$ ) | 60-120 seconds  |
| Time maintained above:                               | Temperature ( $T_L$ )                 | 217°C           |
|                                                      | Time ( $t_L$ )                        | 60-105 seconds  |
| Peak Temperature ( $T_P$ )                           |                                       | 255°C           |
| Time within 5°C of actual Peak Temperature ( $t_p$ ) |                                       | 5 seconds max.  |
| Ramp-Down Rate                                       |                                       | 6°C/second max. |
| Time 25°C to Peak Temperature                        |                                       | 8 minutes max.  |

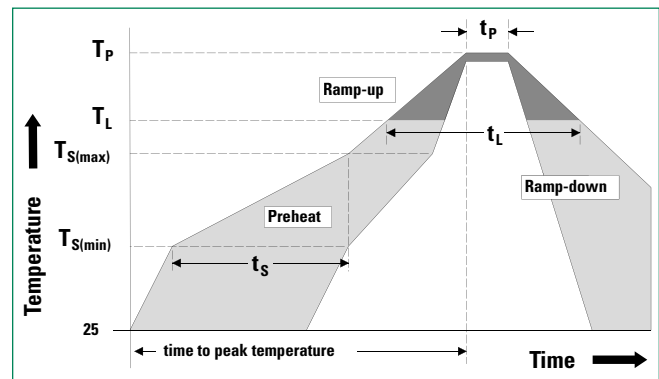


-- All temperature refer to topside of the package, measured on the package body surface  
 -- If reflow temperature exceeds the recommended profile, devices may not meet the performance requirements

# ITV5432 30A Series

## Surface Mount

Typical Application Circuit Diagram

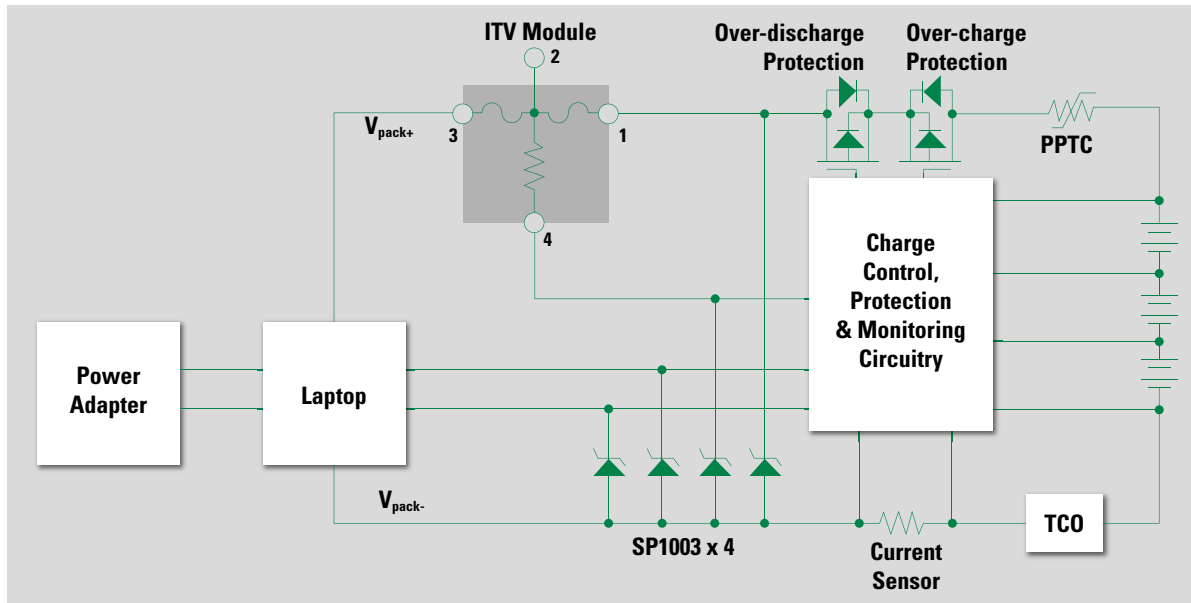


## Installation and Handling Guidelines

- Before and after mounted, the ultrasonic-cleaning or immersion-cleaning must not be done to ITV device. The flux on element would flow, and it would not be satisfied its specification when cleaning is done. In addition, a similar influence happens when the product comes in contact with cleaning solution. These products after cleaning will not be guaranteed.
- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and similar will adversely affect the properties of ITV devices, and shall not be used or applied.
- Please DO NOT reuse the ITV device removed by the soldering process.
- ITV devices are secondary protection devices and are used solely for sporadic, accidental overcurrent or overtemperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the ITV devices.
- The performance of ITV devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection to avoid or minimize damage that may result from extra-ordinary, irregular function or failure of ITV devices.
- There should be minimum of 0.1mm spacing between ITV and surrounding compounds, to maintain the product characteristics and avoid damage other surrounding compounds.
- This product is designed and manufactured only for general-use of electronics devices. We do not recommend that it is used for the applications military, medical and so on which may cause direct damages on life, bodies or properties.


# ITV5432 30A Series

## Surface Mount

### Tape and Reel Specifications (mm)

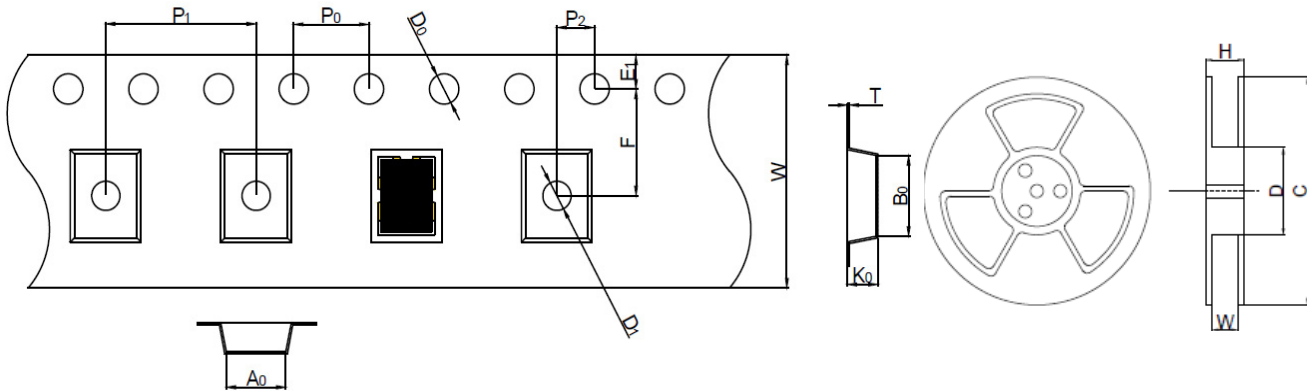


### Part Numbering System

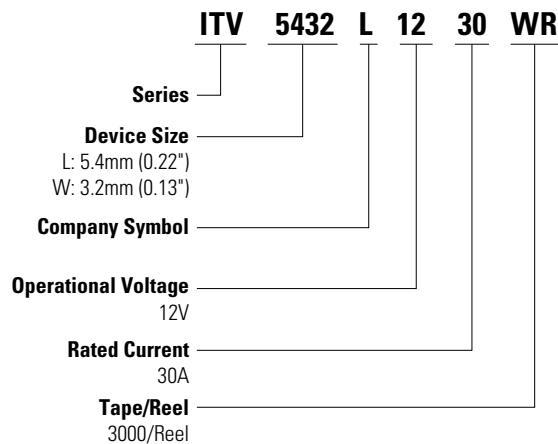

| Symbol    | Dimensions  |
|-----------|-------------|
| <b>W</b>  | 12.0 ± 0.30 |
| <b>F</b>  | 5.50 ± 0.05 |
| <b>E1</b> | 1.75 ± 0.10 |
| <b>D0</b> | 1.55 ± 0.05 |
| <b>D1</b> | 1.50 ± 0.10 |
| <b>P0</b> | 4.00 ± 0.10 |
| <b>P1</b> | 8.00 ± 0.10 |
| <b>P2</b> | 2.00 ± 0.10 |
| <b>A0</b> | 3.55 ± 0.10 |
| <b>B0</b> | 5.75 ± 0.10 |
| <b>T</b>  | 0.25 ± 0.05 |
| <b>K0</b> | 1.75 ± 0.10 |
| <b>H</b>  | 17.4 ± 1.0  |
| <b>W</b>  | 13.4 ± 1.0  |
| <b>D</b>  | Ø99.0 ± 0.5 |
| <b>C</b>  | Ø330 ± 1.0  |

### Part Marking System

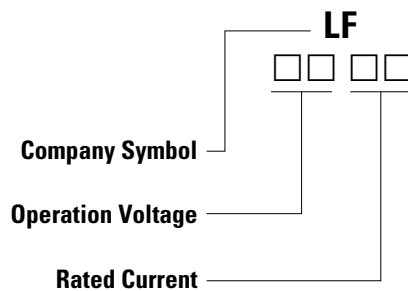

### Packaging

| Part Number  | Tape and Reel Quantity |
|--------------|------------------------|
| ITV5432LXX30 | 3,000                  |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).