

Current Sensor

CC1P030N




General Description

The Littelfuse CC1P030N is a high-performance current sensor based on Closed Loop technology. The high linear output characteristics and high accuracy across the operating temperature range plus the small package size and PCB mounting capability make it an excellent solution for a wide range of applications.

Standards

- EN50178: 1997
- IEC61010-1: 2010
- UL 508: 2013
- IEC62109-1: 2010

Functional Block Diagram

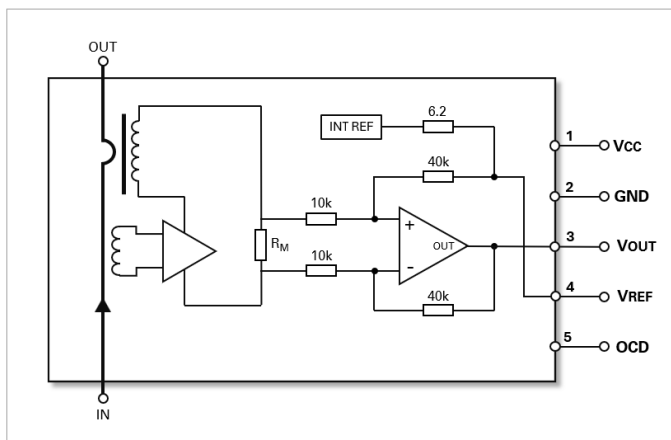

Features

- Closed Loop sensor
- Open aperture design
- Single +5V power supply
- Voltage output
- Wide measuring range
- PCB through-hole mounting
- Operating temperature range:
-40 °C < T < +105 °C
- Primary nominal RMS current:
±100A / ±150A / ±200A / ±250A / ±300A

Benefits

- Very small package size
- Easy mounting via automated handling
- Low offset current
- High immunity to external interference
- Low Temperature coefficient
- Short response time
- Wide frequency bandwidth


Applications

- Static Converters for DC motor drives
- Solar inverters
- AC variable speed drives
- Servo motor drives
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications

Current Sensor

CC1P030N

Littelfuse Current Sensor Naming Convention

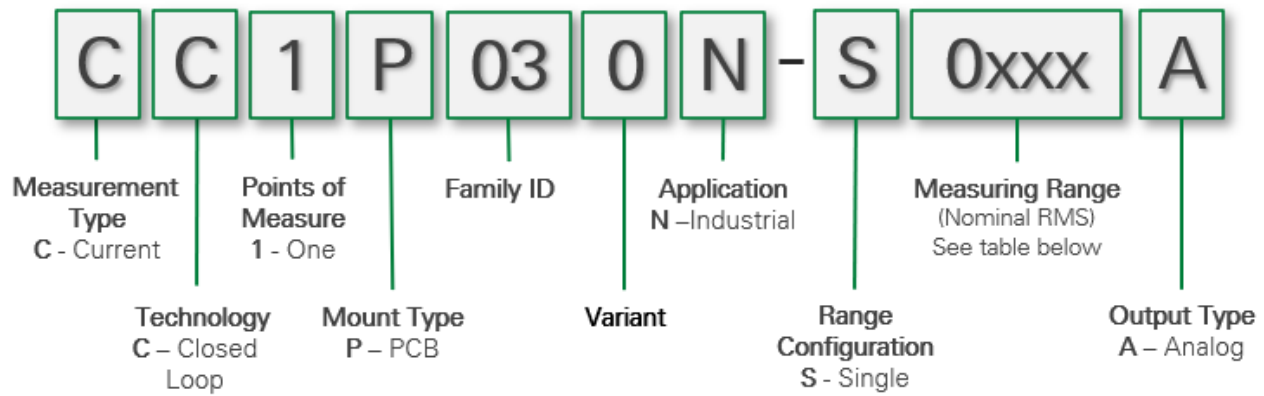

Product Identification (per nominal RMS current range)

Part Name	Littelfuse Part Number	Nominal RMS Current
CC1P030N-S0100A	24941-00-01	±100 A
CC1P030N-S0150A	24941-00-02	±150 A
CC1P030N-S0200A	24941-00-03	±200 A
CC1P030N-S0250A	24941-00-04	±250 A
CC1P030N-S0300A	24941-00-05	±300 A

Current Sensor

CC1P030N

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
T_A	Ambient operating temperature	-40...+85	°C
T_A	Ambient storage temperature	-45...+105	°C
V_{CCMAX}	Supply Voltage	7	V
T_J	Primary conductor temperature	110	°C
I_{PMAX}	Maximum primary current	$10 \times I_{PN}$	A
V_{ESD}	Electrostatic Discharge (ESD), Human Body Model (HBM)	4	kV

Prolonged exposure of the device to absolute maximum values may result in degraded performance. Exposure of the device to conditions in excess of values listed, for any period of time, may result in permanent damage.

Isolation Parameters

Symbol	Parameter	Data	Units
V_d	RMS Voltage for AC insulation test, 50 Hz, 1 minute	4	kV
V_W	Impulse withstand voltage 1.2/50 us	8	kV
D_{CREE}	Creepage (primary to secondary)	12.2	mm
D_{CLEA}	Clearance (primary to secondary)	12.2	mm
CTI	Comparative Tracking Index (Group 2 @UL)	600	V
---	Application example: Reinforced Insulation CAT III, PD2 non-uniform field	600	V
---	Application example: Reinforced Insulation CAT III, PD2 non-uniform field	1000	V

Mechanical Properties

Symbol	Parameter	Material / Data	Comment
---	Case material	PA66	V0 per UL94
---	Terminals	Brass	Ni+Au plating
m	Mass	45g	±10%

Current Sensor

CC1P030N

Electrical Data

CC1P030N-S0100A

Unless otherwise noted: $T_A=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $R_L=10\text{k}\Omega$

Symbol	Parameter	Min.	Typ.	Max.	Units
I_{PN}	Primary nominal RMS current		100		A
I_{PM}	Maximum measuring range	-300		300	A
V_{CC}	Supply voltage	4.75	5	5.25	V
I_C	Current consumption @ I_P		$20+I_P/N_S$ *1000 $N_S = 1500$		mA
V_{ref}	Internal reference voltage @ $I_P=0$	2.485	2.5	2.515	V
V_{out}	Output voltage range @ $I_P=0$, $T_A=25^\circ\text{C}$		V_{ref}		V
V_{OE}	Offset voltage @ $I_P=0$, $T_A=25^\circ\text{C}$	-2		2	mV $V_{out} - V_{ref}$
G_{th}	Sensitivity (theoretical)		6.250		mV $625V/I_{PN}$
X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	-0.8		0.8	% of I_{PN}
E_L	Linearity error @ I_{PN}	-0.2		0.2	% of I_{PN}
TCV_{OUT}	Temperature coefficient of $V_{OUT}@I_{PN}=0$			± 50	ppm/ $^\circ\text{C}$ $V_{ref} = 2.5\text{V}$ -40...85 $^\circ\text{C}$
TCG	Temperature coefficient of X			± 70	ppm/ $^\circ\text{C}$
t_r	Step response time @ 90% of I_{PN}		2		μs
BW	Frequency bandwidth (-3 db)		200		kHz

Current Sensor

CC1P030N

Electrical Data

CC1P030N-S0150A

Unless otherwise noted: $T_A=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $R_L=10\text{k}\Omega$

Symbol	Parameter	Min.	Typ.	Max.	Units
I_{PN}	Primary nominal RMS current		150		A
I_{PM}	Maximum measuring range	-450		450	A
V_{CC}	Supply voltage	4.75	5	5.25	V
I_C	Current consumption @ I_P		$20 + I_P/N_S$ * 1000 $N_S = 1500$		mA
V_{ref}	Internal reference voltage @ $I_P=0$	2.485	2.5	2.515	V
V_{out}	Output voltage range @ $I_P=0$, $T_A=25^\circ\text{C}$		V_{ref}		V
V_{OE}	Offset voltage @ $I_P=0$, $T_A=25^\circ\text{C}$	-2		2	mV $V_{out} - V_{ref}$
G_{th}	Sensitivity (theoretical)		4.167		mV $625V/I_{PN}$
X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	-0.8		0.8	% of I_{PN}
E_L	Linearity error @ I_{PN}	-0.2		0.2	% of I_{PN}
TCV_{OUT}	Temperature coefficient of $V_{OUT}@I_{PN}=0$			± 50	ppm/ $^\circ\text{C}$ $V_{ref} = 2.5\text{V}$ -40...85 $^\circ\text{C}$
TCG	Temperature coefficient of X			± 70	ppm/ $^\circ\text{C}$
t_r	Step response time @ 90% of I_{PN}		2		μs
BW	Frequency bandwidth (-3 db)		200		kHz

Current Sensor

CC1P030N

Electrical Data

CC1P030N-S0200A

Unless otherwise noted: $T_A=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $R_L=10\text{k}\Omega$

Symbol	Parameter	Min.	Typ.	Max.	Units
I_{PN}	Primary nominal RMS current		200		A
I_{PM}	Maximum measuring range	-600		600	A
V_{CC}	Supply voltage	4.75	5	5.25	V
I_C	Current consumption @ I_P		$20+I_P/N_S$ * 1000 $N_S = 1500$		mA
V_{ref}	Internal reference voltage @ $I_P=0$	2.485	2.5	2.515	V
V_{out}	Output voltage range @ $I_P=0$, $T_A=25^\circ\text{C}$		V_{ref}		V
V_{OE}	Offset voltage @ $I_P=0$, $T_A=25^\circ\text{C}$	-2		2	mV $V_{out} - V_{ref}$
G_{th}	Sensitivity (theoretical)		3.125		mV $625V/I_{PN}$
X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	-0.8		0.8	% of I_{PN}
E_L	Linearity error @ I_{PN}	-0.2		0.2	% of I_{PN}
TCV_{OUT}	Temperature coefficient of $V_{OUT}@I_{PN}=0$			± 50	ppm/ $^\circ\text{C}$ $V_{ref} = 2.5\text{V}$ -40...85 $^\circ\text{C}$
TCG	Temperature coefficient of X			± 70	ppm/ $^\circ\text{C}$
t_r	Step response time @ 90% of I_{PN}		2		μs
BW	Frequency bandwidth (-3 db)		200		kHz

Current Sensor

CC1P030N

Electrical Data

CC1P030N-S0250A

Unless otherwise noted: $T_A=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $R_L=10\text{k}\Omega$

Symbol	Parameter	Min.	Typ.	Max.	Units
I_{PN}	Primary nominal RMS current		250		A
I_{PM}	Maximum measuring range	-600		600	A
V_{CC}	Supply voltage	4.75	5	5.25	V
I_C	Current consumption @ I_P		$20+I_P/N_S$ * 1000 $N_S = 1500$		mA
V_{ref}	Internal reference voltage @ $I_P=0$	2.485	2.5	2.515	V
V_{out}	Output voltage range @ $I_P=0$, $T_A=25^\circ\text{C}$		V_{ref}		V
V_{OE}	Offset voltage @ $I_P=0$, $T_A=25^\circ\text{C}$	-2		2	mV $V_{out} - V_{ref}$
G_{th}	Sensitivity (theoretical)		2.5		mV $625V/I_{PN}$
X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	-0.8		0.8	% of I_{PN}
E_L	Linearity error @ I_{PN}	-0.2		0.2	% of I_{PN}
TCV_{OUT}	Temperature coefficient of $V_{OUT}@I_{PN}=0$			± 50	ppm/ $^\circ\text{C}$ $V_{ref} = 2.5\text{V}$ -40...85 $^\circ\text{C}$
TCG	Temperature coefficient of X			± 70	ppm/ $^\circ\text{C}$
t_r	Step response time @ 90% of I_{PN}		2		μs
BW	Frequency bandwidth (-3 db)		200		kHz

Current Sensor

CC1P030N

Electrical Data

CC1P030N-S0300A

Unless otherwise noted: $T_A=25^\circ\text{C}$, $V_{CC}=5\text{V}$, $R_L=10\text{k}\Omega$

Symbol	Parameter	Min.	Typ.	Max.	Units
I_{PN}	Primary nominal RMS current		300		A
I_{PM}	Maximum measuring range	-600		600	A
V_{CC}	Supply voltage	4.75	5	5.25	V
I_C	Current consumption @ I_P		$20+I_P/N_S$ * 1000 $N_S = 1500$		mA
V_{ref}	Internal reference voltage @ $I_P=0$	2.485	2.5	2.515	V
V_{out}	Output voltage range @ $I_P=0$, $T_A=25^\circ\text{C}$		V_{ref}		V
V_{OE}	Offset voltage @ $I_P=0$, $T_A=25^\circ\text{C}$	-2		2	mV $V_{out} - V_{ref}$
G_{th}	Sensitivity (theoretical)		2.083		mV $625V/I_{PN}$
X	Accuracy @ I_{PN} , $T_A=25^\circ\text{C}$	-0.8		0.8	% of I_{PN}
E_L	Linearity error @ I_{PN}	-0.2		0.2	% of I_{PN}
TCV_{OUT}	Temperature coefficient of $V_{OUT}@I_{PN}=0$			± 50	ppm/ $^\circ\text{C}$ $V_{ref} = 2.5\text{V}$ -40...85 $^\circ\text{C}$
TCG	Temperature coefficient of X			± 70	ppm/ $^\circ\text{C}$
t_r	Step response time @ 90% of I_{PN}		2		μs
BW	Frequency bandwidth (-3 db)		200		kHz


Current Sensor

CC1P030N

Current Sensor Dimensions (in mm)

Applicable for all current range variants

CC1P030N

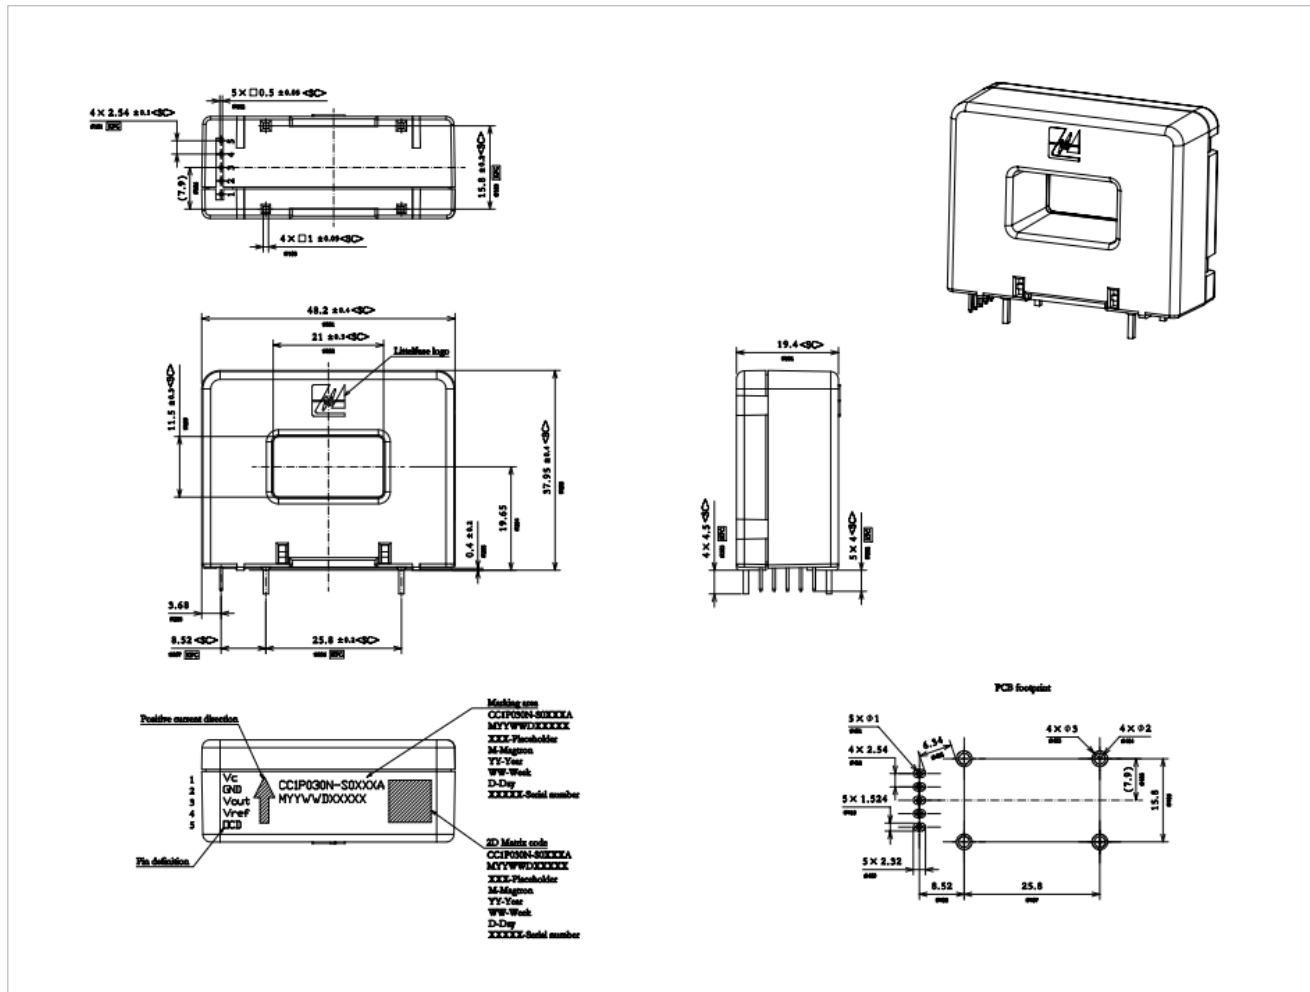

Pinout

Pin	Sym.	Description
1	V_{CC}	Power supply Voltage
2	GND	Ground
3	V_{out}	Output Voltage
4	V_{ref}	Reference Voltage
5	OCD	Over Current Detection

Current Sensor

CC1P030N

Handling

- Handling of sensors should be minimized by maintaining parts within packaging until point of assembly.
- Contact with sensor terminals should be avoided.
- To avoid potential damage, adherence to ESD handling best practices is recommended.
- Dropped parts should be scrapped regardless of evidence of external damage.

Current Sensor

CC1P030N

Contact

Custom electrical and environmental specifications can be designed to meet any need, please contact Littelfuse Engineering for details.

Website: www.littelfuse.com
Sales Support: ALL_Autosensors_Sales@littelfuse.com
Technical Support: ALL_Autosensors_Tech@littelfuse.com

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <https://www.littelfuse.com/legal/disclaimers/product-disclaimer>.

Information provided by Littelfuse is believed to be accurate and reliable.

All rights reserved. Trademarks and registered trademarks are the property of their respective owners.

Littelfuse products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive applications) not expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse product documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse product documentation.

Document version: [Rev. 1.0](#)

Date of print: [03SEP2025](#)