

High Voltage Thyristor \ Diode Module

$$V_{RRM} = 2 \times 2200 \text{ V}$$

$$I_{TAV} = 40 \text{ A}$$

$$V_T = 1.29 \text{ V}$$

Phase leg

Part number

MCNA40PD2200TB



Backside: isolated

 E72873



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al₂O₃-ceramic

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				2300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				2200	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 2200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_{R/D} = 2200\text{ V}$	$T_{VJ} = 140^{\circ}\text{C}$			10	mA
V_T	forward voltage drop	$I_T = 40\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.27	V
		$I_T = 80\text{ A}$				1.58	V
		$I_T = 40\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1.29	V
		$I_T = 80\text{ A}$				1.74	V
I_{TAV}	average forward current	$T_C = 85^{\circ}\text{C}$	$T_{VJ} = 140^{\circ}\text{C}$			40	A
$I_{T(RMS)}$	RMS forward current	180° sine				63	A
V_{T0}	threshold voltage	} for power loss calculation only	$T_{VJ} = 140^{\circ}\text{C}$			0.84	V
r_T	slope resistance					11.4	m Ω
R_{thJC}	thermal resistance junction to case					0.7	K/W
R_{thCH}	thermal resistance case to heatsink				0.2		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$			160	W
I_{TSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			500	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			540	A
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			425	A
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			460	A
I^2t	value for fusing	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 45^{\circ}\text{C}$			1.25	kA ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			1.22	kA ² s
		$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$	$T_{VJ} = 140^{\circ}\text{C}$			905	A ² s
		$t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$	$V_R = 0\text{ V}$			880	A ² s
C_J	junction capacitance	$V_R = 700\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		17		pF
P_{GM}	max. gate power dissipation	$t_p = 30\text{ }\mu\text{s}$	$T_C = 140^{\circ}\text{C}$			10	W
		$t_p = 300\text{ }\mu\text{s}$				5	W
P_{GAV}	average gate power dissipation					0.5	W
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 140^{\circ}\text{C}; f = 50\text{ Hz}$ repetitive, $I_T = 120\text{ A}$				150	A/ μs
		$t_p = 200\text{ }\mu\text{s}; di_G/dt = 0.45\text{ A}/\mu\text{s};$ $I_G = 0.45\text{ A}; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 40\text{ A}$				500	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			1000	V/ μs
		$R_{GK} = \infty$; method 1 (linear voltage rise)					
V_{GT}	gate trigger voltage	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.4	V
			$T_{VJ} = -40^{\circ}\text{C}$			1.6	V
I_{GT}	gate trigger current	$V_D = 6\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			70	mA
			$T_{VJ} = -40^{\circ}\text{C}$			150	mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 140^{\circ}\text{C}$			0.2	V
I_{GD}	gate non-trigger current					5	mA
I_L	latching current	$t_p = 10\text{ }\mu\text{s}$	$T_{VJ} = 25^{\circ}\text{C}$			150	mA
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
I_H	holding current	$V_D = 6\text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^{\circ}\text{C}$			100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^{\circ}\text{C}$			2	μs
		$I_G = 0.45\text{ A}; di_G/dt = 0.45\text{ A}/\mu\text{s}$					
t_q	turn-off time	$V_R = 100\text{ V}; I_T = 40\text{ A}; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^{\circ}\text{C}$ $di/dt = 10\text{ A}/\mu\text{s}$ $dv/dt = 20\text{ V}/\mu\text{s}$ $t_p = 200\text{ }\mu\text{s}$			500		μs

Package TO-240AA				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				200	A
T_{VJ}	virtual junction temperature			-40		140	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		125	°C
Weight					81		g
M_D	mounting torque			2.5		4	Nm
M_T	terminal torque			2.5		4	Nm
$d_{Spp/Apb}$	creepage distance on surface striking distance through air	terminal to terminal	13.0	9.7			mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4800			V
		t = 1 minute		4000			V



Part description

M = Module
 C = Thyristor (SCR)
 N = High Voltage Thyristor
 A = ($\geq 2000V$)
 40 = Current Rating [A]
 PD = Phase leg
 2200 = Reverse Voltage [V]
 TB = TO-240AA-1B

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCNA40PD2200TB	MCNA40PD2200TB	Box	36	522358

Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 140^{\circ}C$



Thyristor

$V_{0\ max}$	threshold voltage	0.84	V
$R_{0\ max}$	slope resistance *	10.2	mΩ

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions:

- Overall width: 92 ± 0.5
- Distance from the first pin to the last pin: 80 ± 0.3
- Pin diameter: 5.5 ± 0.1
- Pin pitch: 10 ± 0.1
- Pin 1 diameter: 14.8
- Pin 1 to Pin 2 distance: 10 ± 0.1
- Pin 2 to Pin 3 distance: 10 ± 0.1
- Pin 3 to Pin 4 distance: 10 ± 0.1
- Pin 4 to Pin 5 distance: 10 ± 0.1
- Pin 5 to Pin 6 distance: 10 ± 0.1
- Pin 6 to Pin 7 distance: 10 ± 0.1
- Pin 7 to Pin 8 distance: 10 ± 0.1
- Pin 8 to Pin 9 distance: 10 ± 0.1
- Pin 9 to Pin 10 distance: 10 ± 0.1
- Pin 10 to Pin 11 distance: 10 ± 0.1
- Pin 11 to Pin 12 distance: 10 ± 0.1
- Pin 12 to Pin 13 distance: 10 ± 0.1
- Pin 13 to Pin 14 distance: 10 ± 0.1
- Pin 14 to Pin 15 distance: 10 ± 0.1
- Pin 15 to Pin 16 distance: 10 ± 0.1
- Pin 16 to Pin 17 distance: 10 ± 0.1
- Pin 17 to Pin 18 distance: 10 ± 0.1
- Pin 18 to Pin 19 distance: 10 ± 0.1
- Pin 19 to Pin 20 distance: 10 ± 0.1
- Pin 20 to Pin 21 distance: 10 ± 0.1
- Pin 21 to Pin 22 distance: 10 ± 0.1
- Pin 22 to Pin 23 distance: 10 ± 0.1
- Pin 23 to Pin 24 distance: 10 ± 0.1
- Pin 24 to Pin 25 distance: 10 ± 0.1
- Pin 25 to Pin 26 distance: 10 ± 0.1
- Pin 26 to Pin 27 distance: 10 ± 0.1
- Pin 27 to Pin 28 distance: 10 ± 0.1
- Pin 28 to Pin 29 distance: 10 ± 0.1
- Pin 29 to Pin 30 distance: 10 ± 0.1
- Pin 30 to Pin 31 distance: 10 ± 0.1
- Pin 31 to Pin 32 distance: 10 ± 0.1
- Pin 32 to Pin 33 distance: 10 ± 0.1
- Pin 33 to Pin 34 distance: 10 ± 0.1
- Pin 34 to Pin 35 distance: 10 ± 0.1
- Pin 35 to Pin 36 distance: 10 ± 0.1
- Pin 36 to Pin 37 distance: 10 ± 0.1
- Pin 37 to Pin 38 distance: 10 ± 0.1
- Pin 38 to Pin 39 distance: 10 ± 0.1
- Pin 39 to Pin 40 distance: 10 ± 0.1
- Pin 40 to Pin 41 distance: 10 ± 0.1
- Pin 41 to Pin 42 distance: 10 ± 0.1
- Pin 42 to Pin 43 distance: 10 ± 0.1
- Pin 43 to Pin 44 distance: 10 ± 0.1
- Pin 44 to Pin 45 distance: 10 ± 0.1
- Pin 45 to Pin 46 distance: 10 ± 0.1
- Pin 46 to Pin 47 distance: 10 ± 0.1
- Pin 47 to Pin 48 distance: 10 ± 0.1
- Pin 48 to Pin 49 distance: 10 ± 0.1
- Pin 49 to Pin 50 distance: 10 ± 0.1
- Pin 50 to Pin 51 distance: 10 ± 0.1
- Pin 51 to Pin 52 distance: 10 ± 0.1
- Pin 52 to Pin 53 distance: 10 ± 0.1
- Pin 53 to Pin 54 distance: 10 ± 0.1
- Pin 54 to Pin 55 distance: 10 ± 0.1
- Pin 55 to Pin 56 distance: 10 ± 0.1
- Pin 56 to Pin 57 distance: 10 ± 0.1
- Pin 57 to Pin 58 distance: 10 ± 0.1
- Pin 58 to Pin 59 distance: 10 ± 0.1
- Pin 59 to Pin 60 distance: 10 ± 0.1
- Pin 60 to Pin 61 distance: 10 ± 0.1
- Pin 61 to Pin 62 distance: 10 ± 0.1
- Pin 62 to Pin 63 distance: 10 ± 0.1
- Pin 63 to Pin 64 distance: 10 ± 0.1
- Pin 64 to Pin 65 distance: 10 ± 0.1
- Pin 65 to Pin 66 distance: 10 ± 0.1
- Pin 66 to Pin 67 distance: 10 ± 0.1
- Pin 67 to Pin 68 distance: 10 ± 0.1
- Pin 68 to Pin 69 distance: 10 ± 0.1
- Pin 69 to Pin 70 distance: 10 ± 0.1
- Pin 70 to Pin 71 distance: 10 ± 0.1
- Pin 71 to Pin 72 distance: 10 ± 0.1
- Pin 72 to Pin 73 distance: 10 ± 0.1
- Pin 73 to Pin 74 distance: 10 ± 0.1
- Pin 74 to Pin 75 distance: 10 ± 0.1
- Pin 75 to Pin 76 distance: 10 ± 0.1
- Pin 76 to Pin 77 distance: 10 ± 0.1
- Pin 77 to Pin 78 distance: 10 ± 0.1
- Pin 78 to Pin 79 distance: 10 ± 0.1
- Pin 79 to Pin 80 distance: 10 ± 0.1
- Pin 80 to Pin 81 distance: 10 ± 0.1
- Pin 81 to Pin 82 distance: 10 ± 0.1
- Pin 82 to Pin 83 distance: 10 ± 0.1
- Pin 83 to Pin 84 distance: 10 ± 0.1
- Pin 84 to Pin 85 distance: 10 ± 0.1
- Pin 85 to Pin 86 distance: 10 ± 0.1
- Pin 86 to Pin 87 distance: 10 ± 0.1
- Pin 87 to Pin 88 distance: 10 ± 0.1
- Pin 88 to Pin 89 distance: 10 ± 0.1
- Pin 89 to Pin 90 distance: 10 ± 0.1
- Pin 90 to Pin 91 distance: 10 ± 0.1
- Pin 91 to Pin 92 distance: 10 ± 0.1
- Pin 92 to Pin 93 distance: 10 ± 0.1
- Pin 93 to Pin 94 distance: 10 ± 0.1
- Pin 94 to Pin 95 distance: 10 ± 0.1
- Pin 95 to Pin 96 distance: 10 ± 0.1
- Pin 96 to Pin 97 distance: 10 ± 0.1
- Pin 97 to Pin 98 distance: 10 ± 0.1
- Pin 98 to Pin 99 distance: 10 ± 0.1
- Pin 99 to Pin 100 distance: 10 ± 0.1
- Pin 100 to Pin 101 distance: 10 ± 0.1
- Pin 101 to Pin 102 distance: 10 ± 0.1
- Pin 102 to Pin 103 distance: 10 ± 0.1
- Pin 103 to Pin 104 distance: 10 ± 0.1
- Pin 104 to Pin 105 distance: 10 ± 0.1
- Pin 105 to Pin 106 distance: 10 ± 0.1
- Pin 106 to Pin 107 distance: 10 ± 0.1
- Pin 107 to Pin 108 distance: 10 ± 0.1
- Pin 108 to Pin 109 distance: 10 ± 0.1
- Pin 109 to Pin 110 distance: 10 ± 0.1
- Pin 110 to Pin 111 distance: 10 ± 0.1
- Pin 111 to Pin 112 distance: 10 ± 0.1
- Pin 112 to Pin 113 distance: 10 ± 0.1
- Pin 113 to Pin 114 distance: 10 ± 0.1
- Pin 114 to Pin 115 distance: 10 ± 0.1
- Pin 115 to Pin 116 distance: 10 ± 0.1
- Pin 116 to Pin 117 distance: 10 ± 0.1
- Pin 117 to Pin 118 distance: 10 ± 0.1
- Pin 118 to Pin 119 distance: 10 ± 0.1
- Pin 119 to Pin 120 distance: 10 ± 0.1
- Pin 120 to Pin 121 distance: 10 ± 0.1
- Pin 121 to Pin 122 distance: 10 ± 0.1
- Pin 122 to Pin 123 distance: 10 ± 0.1
- Pin 123 to Pin 124 distance: 10 ± 0.1
- Pin 124 to Pin 125 distance: 10 ± 0.1
- Pin 125 to Pin 126 distance: 10 ± 0.1
- Pin 126 to Pin 127 distance: 10 ± 0.1
- Pin 127 to Pin 128 distance: 10 ± 0.1
- Pin 128 to Pin 129 distance: 10 ± 0.1
- Pin 129 to Pin 130 distance: 10 ± 0.1
- Pin 130 to Pin 131 distance: $$

Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red
Type ZY 200L (L = Left for pin pair 4/5) UL 758, style 3751



Thyristor

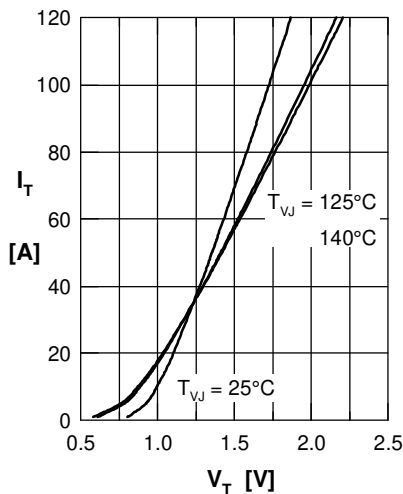


Fig. 1 Forward characteristics

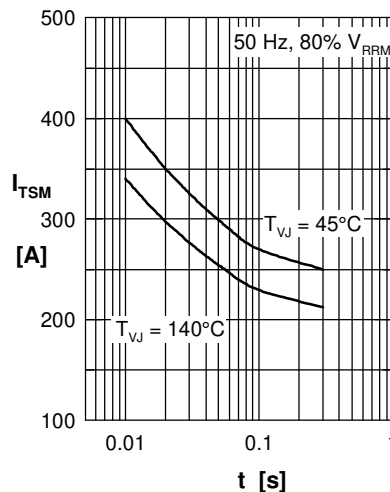


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

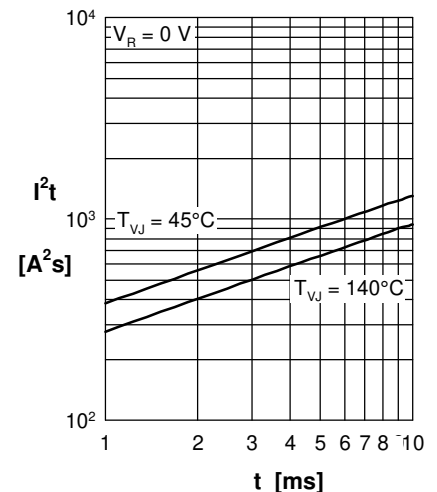


Fig. 3 I^2t versus time (1-10 s)

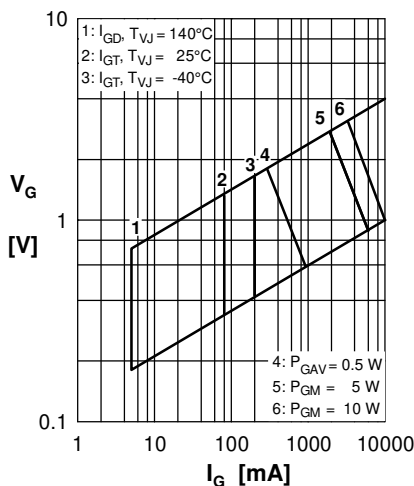


Fig. 4 Gate voltage & gate current

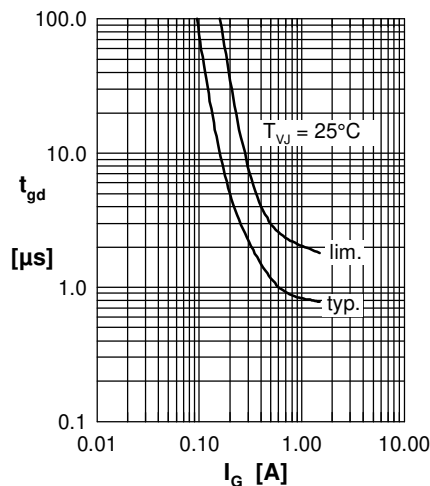


Fig. 5 Gate controlled delay time t_{gd}

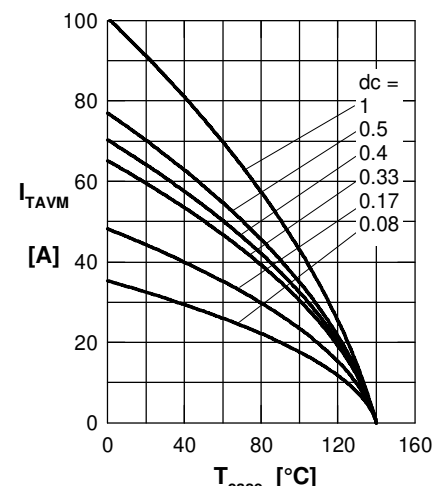


Fig. 6 Max. forward current at case temperature

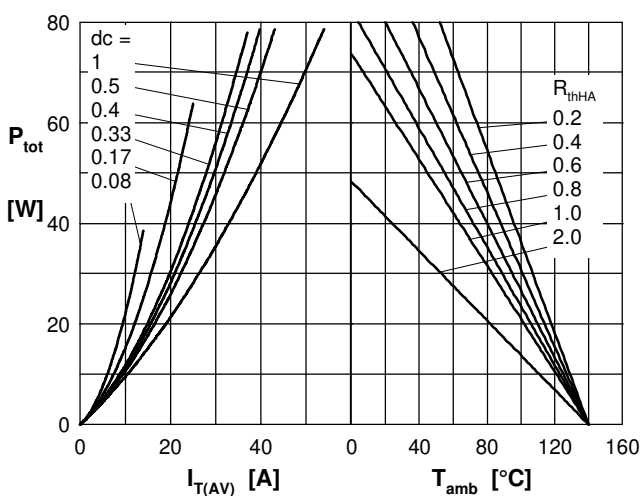


Fig. 7a Power dissipation versus direct output current
 Fig. 7b and ambient temperature

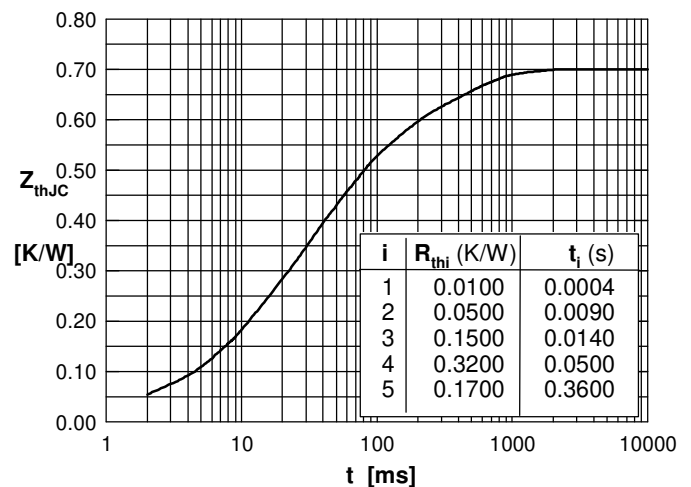


Fig. 8 Transient thermal impedance junction to case