



CoolMOS™ 1) Power MOSFET

Low $R_{DS(on)}$, high V_{DSS}
Superjunction MOSFET

$$\begin{aligned} V_{DSS} &= 600 \text{ V} \\ I_{D25} &= 85 \text{ A} \\ R_{DS(on) \text{ max}} &= 36 \text{ m}\Omega \end{aligned}$$



TO-264

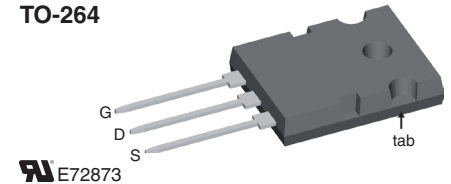

MOSFET			
Symbol	Conditions	Maximum Ratings	
V_{DSS}	$T_{VJ} = 25^\circ\text{C}$	600	V
V_{GS}		± 20	V
I_{D25}	$T_C = 25^\circ\text{C}$	85	A
I_{D100}	$T_C = 100^\circ\text{C}$	55	A
E_{AS}	single pulse $I_D = 10 \text{ A}; T_C = 25^\circ\text{C}$	1800	mJ
E_{AR}	repetitive $I_D = 20 \text{ A}; T_C = 25^\circ\text{C}$	1	mJ
dV/dt	MOSFET dV/dt ruggedness $V_{DS} = 0 \dots 480 \text{ V}$	50	V/ns

Features

- 3rd generation CoolMOS™ 1) power MOSFET
- high blocking capability
- lowest resistance
- avalanche rated for unclamped inductive switching (UIS)
- low thermal resistance due to reduced chip thickness

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating

1) CoolMOS™ is a trademark of Infineon Technologies AG.

Symbol	Conditions	Characteristic Values			
		(T _{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}; I_D = I_{D100}$ ①		30	36	mΩ
$V_{GS(th)}$	$V_{DS} = V_{GS}; I_D = 5.4 \text{ mA}$	2		4	V
I_{DSS}	$V_{DS} = V_{DSS}; V_{GS} = 0 \text{ V}$			50 500	μA μA
I_{GSS}	$V_{GS} = \pm 20 \text{ V}; V_{DS} = 0 \text{ V}$			± 200	nA
C_{iss} C_{oss} C_{rss}	$V_{GS} = 0 \text{ V}; V_{DS} = 25 \text{ V}$ $f = 1 \text{ MHz}$		13.6 4.4 290		nF nF pF
Q_g Q_{gs} Q_{gd}	$V_{GS} = 0 \text{ to } 10 \text{ V}; V_{DS} = 350 \text{ V}; I_D = 85 \text{ A}$		500 50 240	640	nC nC nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	$V_{GS} = 13 \text{ V}; V_{DS} = 380 \text{ V}$ $I_D = 85 \text{ A}; R_G = 1.0 \Omega$		20 27 110 10		ns ns ns ns
R_{thJC}				0.18	K/W

① Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$

Source-Drain Diode


Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
I_S	$V_{GS} = 0 \text{ V}$			85
I_{SM}				250
V_{SD}	$I_F = 85 \text{ A}; V_{GS} = 0 \text{ V}$			1.2
t_{rr}	$I_F = 85 \text{ A}; -di_F/dt = 200 \text{ A}/\mu\text{s}; V_R = 350 \text{ V}$	580		ns
Q_{RM}		46		μC
I_{RM}		140		A

Component

Symbol	Conditions	Maximum Ratings		
T_{VJ}	operating	-55...+150		$^{\circ}\text{C}$
T_{stg}		-55...+150		$^{\circ}\text{C}$
M_d	mounting torque	0.8 ... 1.2		Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{thCH}	with heatsink compound	0.15		K/W
Weight		10		g


TO-264 Outline

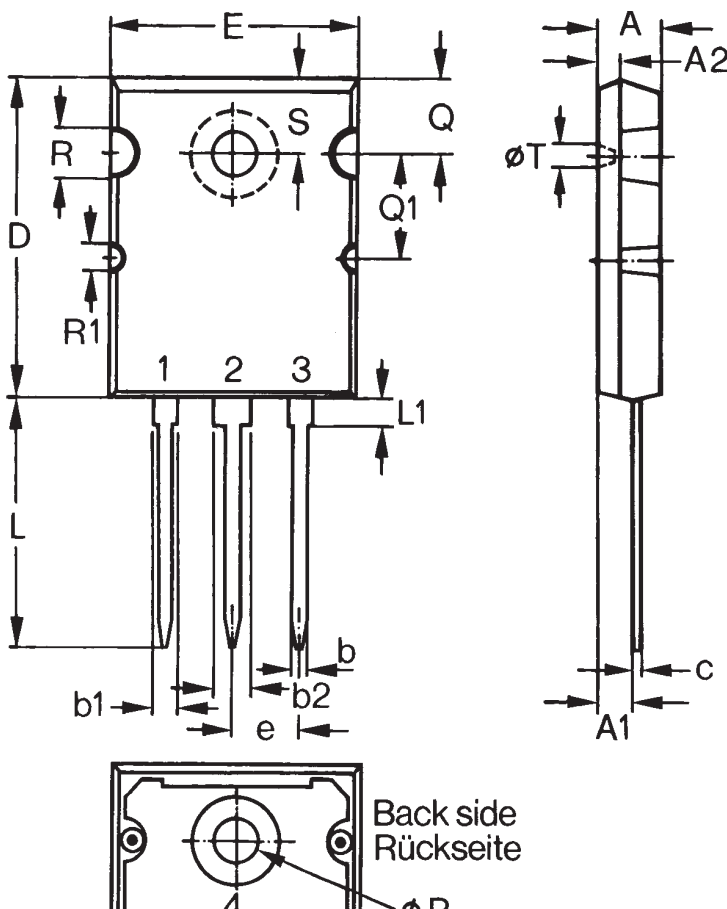


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.209	4.70	5.31
A1	.102	.118	2.59	3.00
b	.037	.055	0.94	1.40
b1	.087	.102	2.21	2.59
b2	.110	.126	2.79	3.20
C	.017	.029	0.43	0.74
D	1.007	1.047	25.58	26.59
E	.760	.799	19.30	20.29
e	.215 BSC		5.46 BSC	
L	.193	.201	4.90	5.10
L1	.088	.096	2.24	2.44
L2	.075	.083	1.90	2.10
L3	.000	.004	0.00	0.10
ØP	.122	.138	3.10	3.51
Q	.240	.256	6.10	6.50
Q1	.330	.346	8.38	8.79
ØR	.155	.187	3.94	4.75
ØR1	.085	.093	2.16	2.36
S	.243	.253	6.17	6.43

- NOTE 1. This drawing meets all dimension requirement of JEDEC outline TO-264AA except L, L1, L2, L3
2. All metal surface are solder plated except trimmed area


**Fig. 1. Output Characteristics
@ 25 Deg. C**

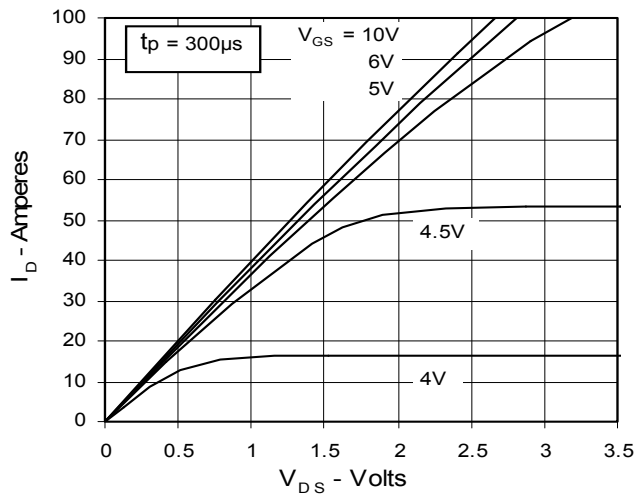


**Fig. 2. Extended Output Characteristics
@ 25 deg. C**

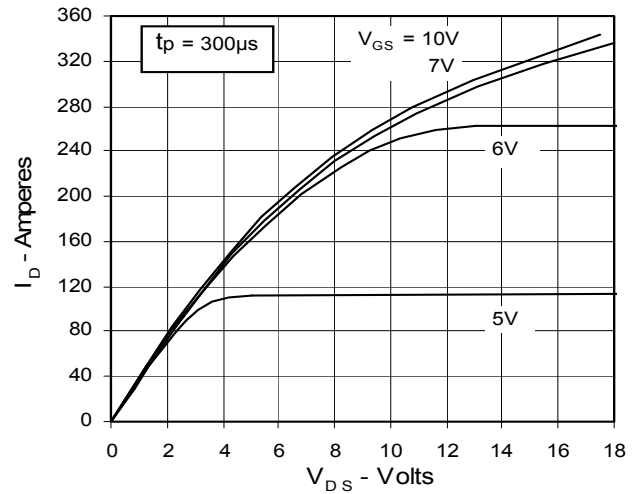


**Fig. 3. Output Characteristics
@ 125 Deg. C**

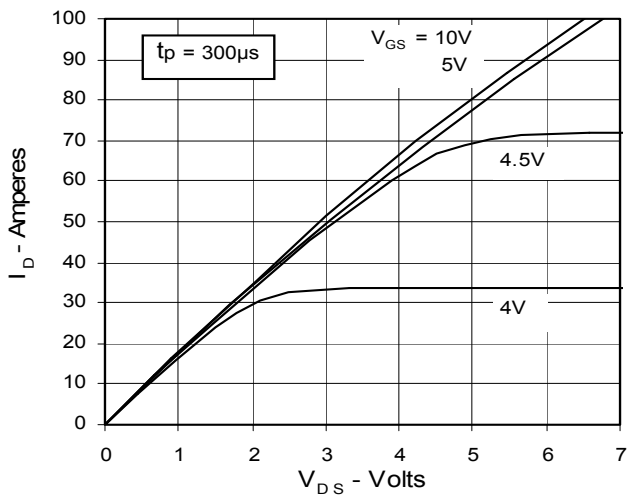

**Fig. 4. $R_{DS(on)}$ Normalized to I_{D100} Value
vs. Junction Temperature**

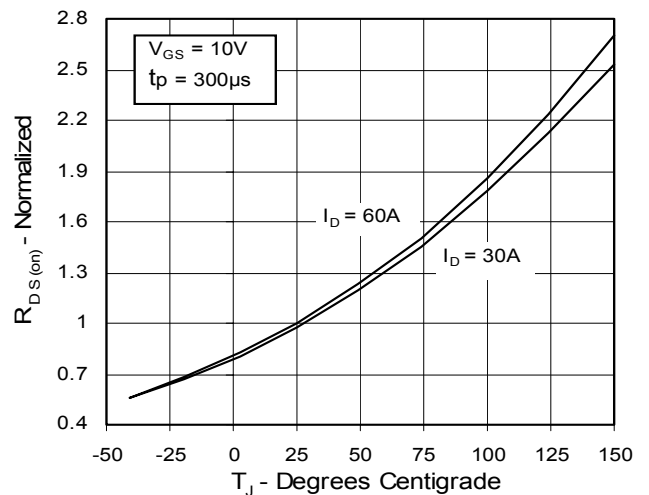

**Fig. 5. $R_{DS(on)}$ Normalized to
 I_{D100} Value vs. I_D**

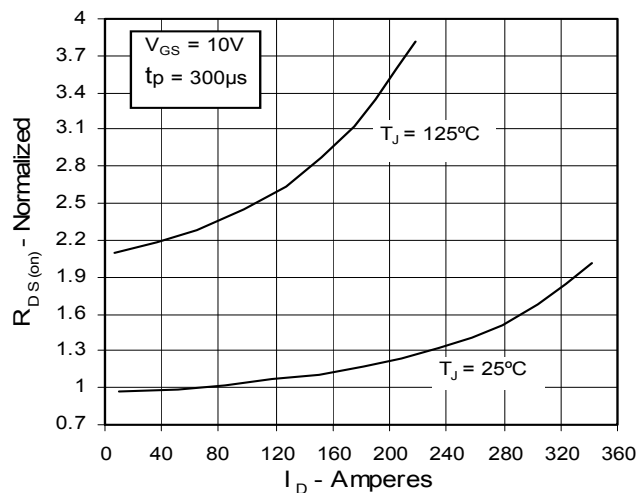

**Fig. 6. Drain Current vs. Case
Temperature**

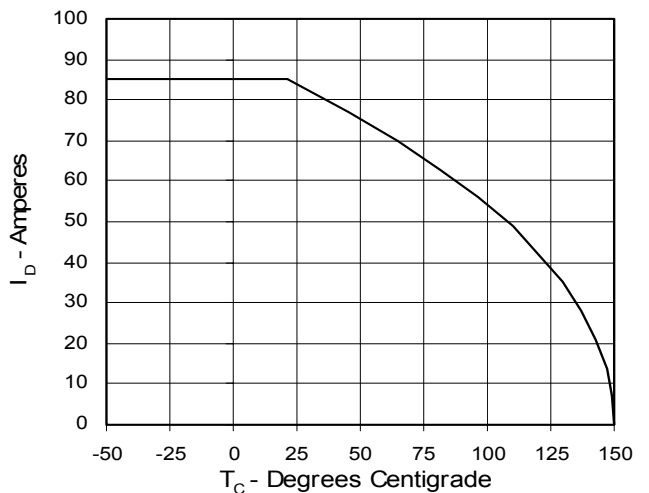


Fig. 7. Input Admittance

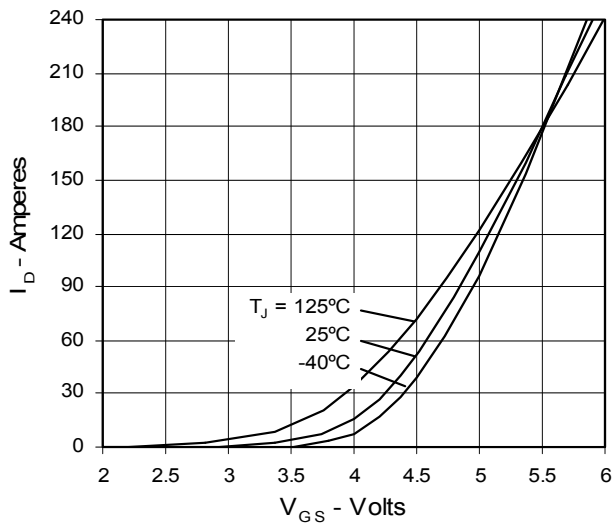


Fig. 8. Transconductance

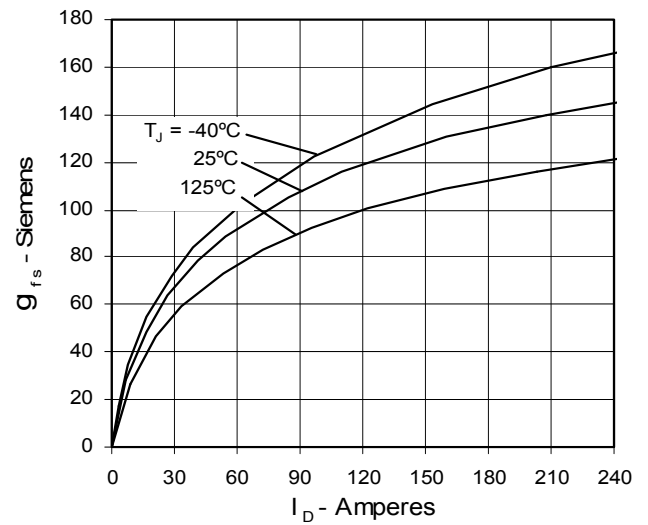


Fig. 9. Source Current vs. Source-To-Drain Voltage

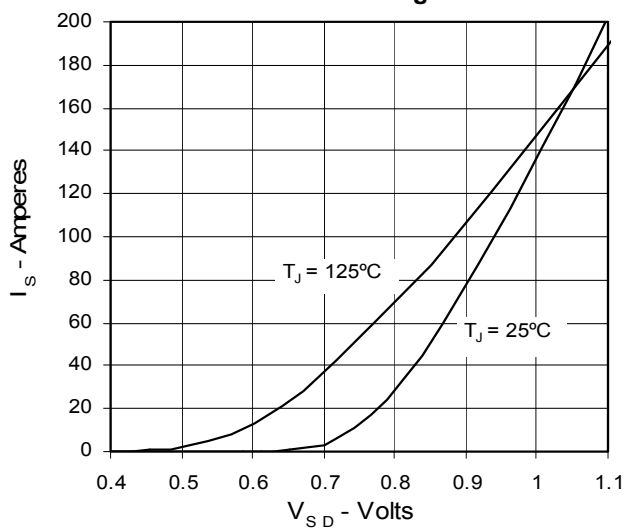


Fig. 10. Gate Charge

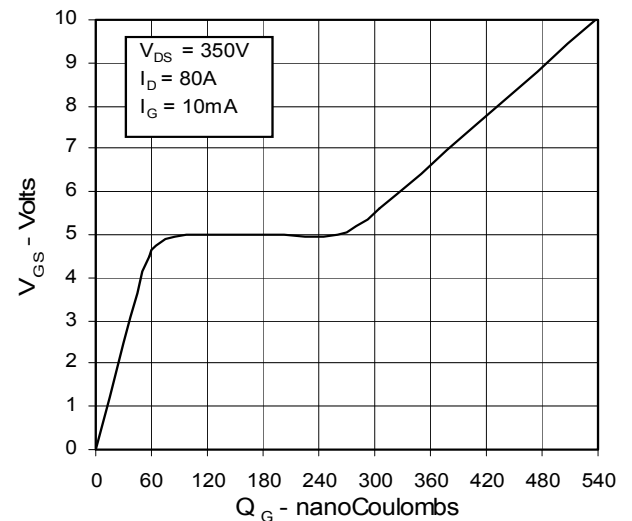


Fig. 11. Capacitance


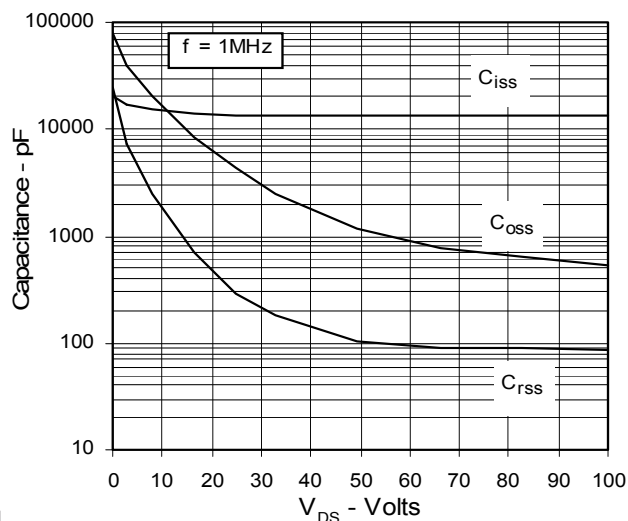


Fig. 12. Maximum Transient Thermal Resistance



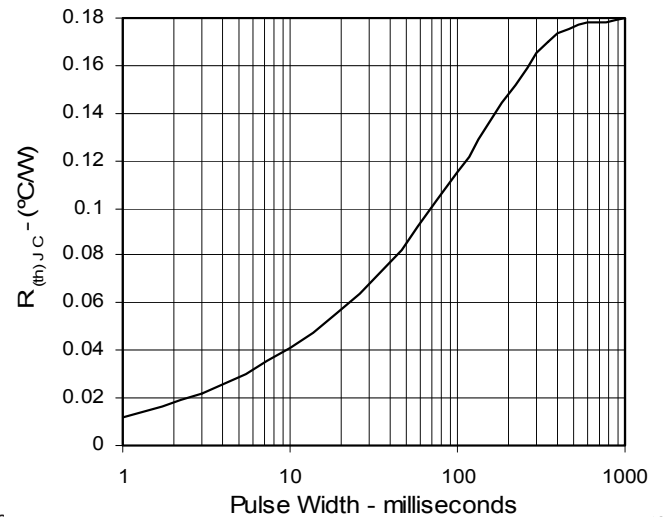

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.