



| PART NUMBER   | UPC CODE    |
|---------------|-------------|
| LS604002ES00L | 07945826647 |

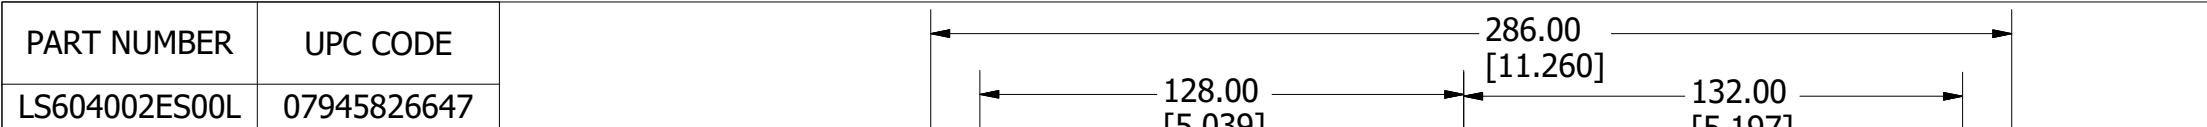


| REVISION |         |                         |
|----------|---------|-------------------------|
| REV      | DATE    | DESCRIPTION             |
| A        | 4/21/20 | 522213GCP - RELEASE MRY |

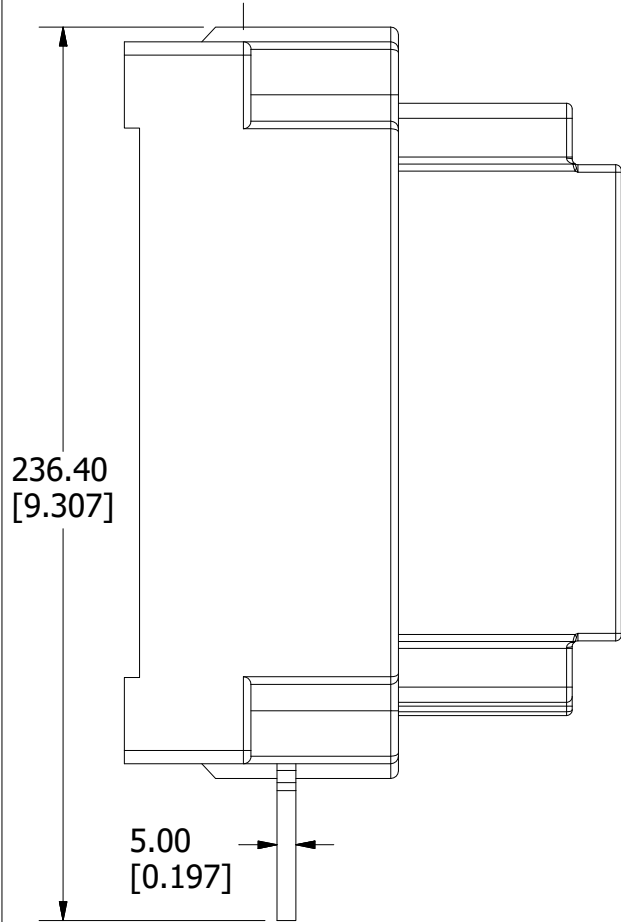

SPEC LABEL

|                           |            |
|---------------------------|------------|
| Par apriete terminal lugs |            |
| Terminal torque           | 24 Nxm     |
| Couple de serrage         | 212 lbf.in |
| des terminaux             |            |
| Boise terminales          |            |
| Kit terminal lugs         | LDRTL22W   |
| Kit de terminaux          |            |
| Tipo cable                |            |
| Wire type                 | Cu         |
| Type de câble             |            |
| Rango de temperatura      |            |
| Temperature rating        | 75 °C      |
| Intervale de              |            |
| températures              |            |
| Fecha de fabricación      |            |
| Manufacture date          | 01/08/20   |
| Date de fabrication       |            |

PRODUCT LABEL

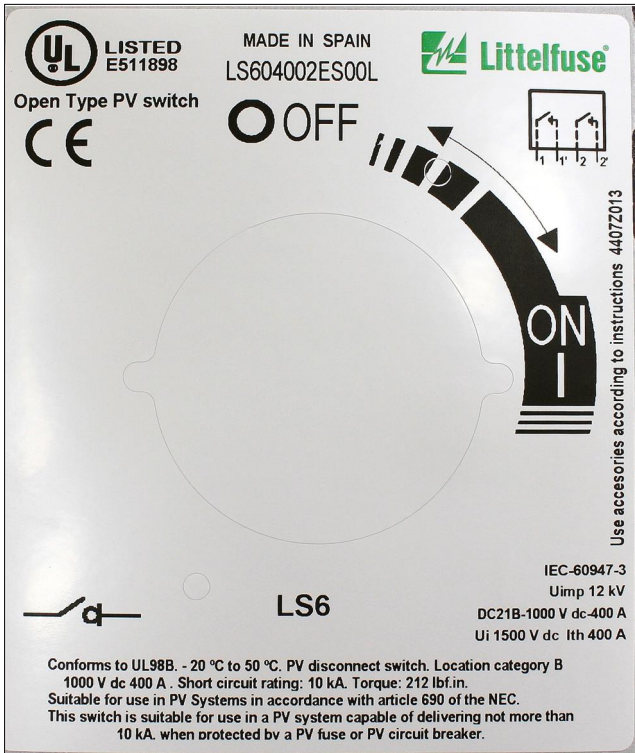

|                                                                                                                                                                                                             |                                                                                                                                                                          |               |                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------------------------------------|
| <S>                                                                                                                                                                                                         | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE                                                                                                                       |               |                                           |
| ●                                                                                                                                                                                                           | DENOTES CRITICAL CHARACTERISTICS.                                                                                                                                        |               |                                           |
| CPK                                                                                                                                                                                                         | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE                                                                                                                               |               |                                           |
| ST                                                                                                                                                                                                          | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |               |                                           |
| CP                                                                                                                                                                                                          | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |               | B                                         |
| MATL SPEC                                                                                                                                                                                                   |                                                                                                                                                                          | FINISH        |                                           |
| DRW myork                                                                                                                                                                                                   | DATE 10/23/2019                                                                                                                                                          | SCALE NTS     | FINISH GOOD WT GRAMS/PIECE                |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 |                                                                                                                                                                          |               |                                           |
| 3RD ANGLE PROJECTION                                                                                                                                                                                        |                                                                                                                                                                          |               |                                           |
|                                                                                                                        |                                                                                                                                                                          |               |                                           |
| TITLE DISCONNECT SWITCH 400A 1000VDC 2 POLE OUTLINE                                                                                                                                                         |                                                                                                                                                                          |               |                                           |
|  <b>Littelfuse®</b><br>CHICAGO, ILLINOIS 60631                                                                         |                                                                                                                                                                          | REVISION<br>A | DRWG NO. OL-LS604002ES00L<br>SHEET 1 OF 1 |