PART NUMBER	AMPERAGE	VOLTAGE RATING AC-DC	INTERRUPTING RATING	
			AC	DC
0476001	1 A	250-86/125	100A	10KA/300A
04761.25	1.25 A	250-86/125	100A	10KA/300A
047601.6	1.6 A	250-86/125	100A	10KA/300A
0476002	2 A	250-86/125	100A	10KA/300A
047602.5	2.5 A	250-86/125	100A	10KA/300A
0476003	3 A	250-86/125	100A	10KA/300A
047603.5	3.5 A	250-86/125	100A	10KA/300A
0476004	4 A	250-86/125	100A	10KA/300A
0476005	5 A	250-86/125	100A	10KA/300A
047606.3	6.3 A	125-86/125	100A	10KA/300A
0476007	7 A	125-86/125	100A	10KA/300A
0476008	8 A	125-86/125	100A	10KA/300A
0476010	10 A	125-86/125	100A	10KA/300A
0476012	12 A	125	100A	300A
0476015	15 A	125	100A	300A

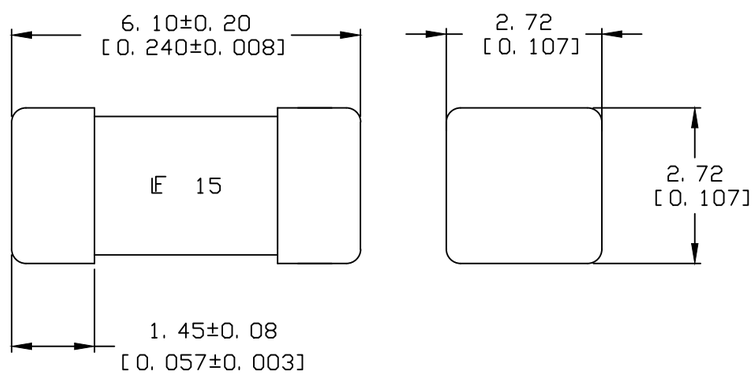

NOTES:

1. MATERIAL: BODY: CERAMIC
   CAPS: BRASS, COATED WITH TIN THROUGH HOT TIN DIP.
2. FUSE IS MARKED WITH AMPERAGE RATING AND APPLICABLE LOGOS ON ONE SIDE.
3. FUSES ARE REELED 1000 FUSES PER REEL.
4. FOR CUSTOMER RESISTANCE LIMITS SEE ES-001477.
5. FOR RoHS REPORTING DOCUMENTS SEE ES-001478.

BLOW TIME		
% OF RATING	AMPERE RATING	OPENING TIME
100%	1A-15A	4HRS. MIN.
125%	1A-5A	1HR. MIN.
200%	1A-15A	120 SEC. MAX.
1000%	1A-5A	0.001SEC. MIN. 0.01SEC. MAX.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CKP VALUE.

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

B

U/M	QTY/M	DESCRIPTION	COMPONENT NO

BILL OF MATERIAL

MATL SPEC | FINISH

		DATE	
DRW	MLB	07/25/14	SCALE 10:1
CHK	GBM	07/25/14	SUPER DRW
APPD	GBM	07/25/14	FINISH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.25[.01] FRACTION ±
THREE PLACE DEC ±.100[.004] ANGULAR ±1°

TITLE 476 V/FA NANO2 FUSE SnDIP RoHS OUTLINE

3RD ANGLE PROJECTION

COPIES TO 1 9 18 2 10 19 3 12 20 4 13 21 5 14 23 6 15 33 7 16 43 8 17 53

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION B DRWG. NO. 0476000SN OUTLINE SERIES

LTR	REVISION	CHK	APD
A	510379GCE - RELEASED 07/25/14 MLB		
B	511269GCE - RELEASED 1A TO 10AMPS. 02/02/15 MLB	GBM	GBM