CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

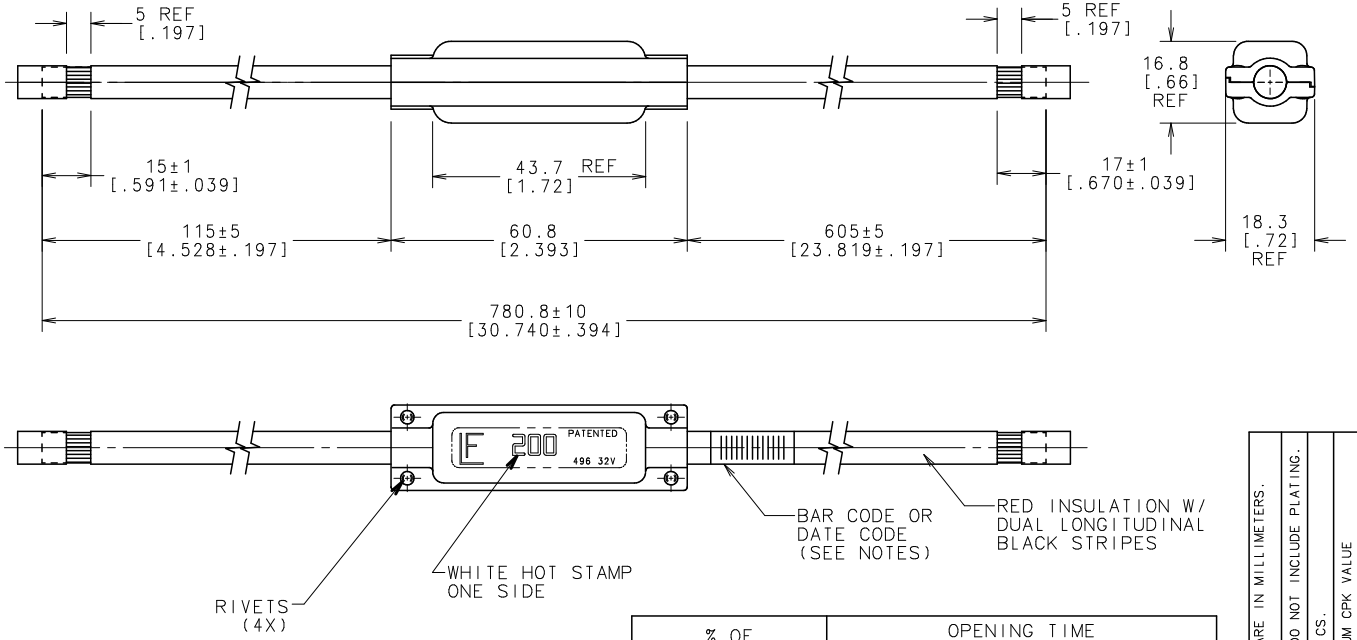

% OF RATING	OPENING TIME	
	MINIMUM	MAXIMUM
100	100 HRS.	-
135	120 S	1800 S
200	10 S	300 S
350	1 S	15 S
600	0.3 S	5 S

NOTES:

INTERRUPT RATING: 2000A @ 32VDC
VOLTAGE RATING: 32VDC
TEMP. RATING: -40°C - 125°C
CABLE TYPE: XLPE, SAE J1127, STX (4AWG)
SPECIFICATION: MEETS LITTELFUSE'S VS-006013 SPECIFICATION
APPLICATION: DESIGNED FOR UNDERHOOD INSTALLMENT.
BAR CODE OR DATE CODE: THE BAR CODE OR DATE CODE IS USED FOR LOT TRACEABILITY. IT IS ON ONE OF THE CABLE LEADS.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.
DENOTES CRITICAL CHARACTERISTICS.
DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
DENOTES CP DIMENSIONS,-MINIMUM CP VALUE TO BE WITHIN THE DIMENSIONAL LIMITATIONS ON DRAWING AND INITIALLY LOCATED TO A MAXIMUM TOOL LIFE.

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

COPIES TO																							
	1	9	18	2	10	19	3	12	20	4	13	21	5	14	23	6	15	33	7	16	43	8	17	53

MATL SPEC
FINISH
DRW DHM DATE 6/07/06 SCALE FULL
CHK DATE SUPER DRW
APPD DATE FINISH GOOD WT GRAMS/PIECE
TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.25[.01] FRACTION ±
THREE PLACE DEC ±.100[.004] ANGULAR ±1°
TITLE CABLEPRO
3RD ANGLE PROJECTION
REVISION B
DRWG. NO. 0496200.ZXAE
OUTLINE

Littelfuse
DES PLAINES, ILLINOIS 60016

LTR	REVISION	CHK	APD
A	62032 - RELEASED 06/07/06 DHM		
B	85237C-CHG LEAD "A" STRIP FROM 17 TO 15, CHG LEAD "B" LGTH FROM 625 TO 605. CHG		
-	O'ALL LGTH FROM 800.8 TO 780.8. 11/28/06 DHM		

UNCONTROLLED DOCUMENT