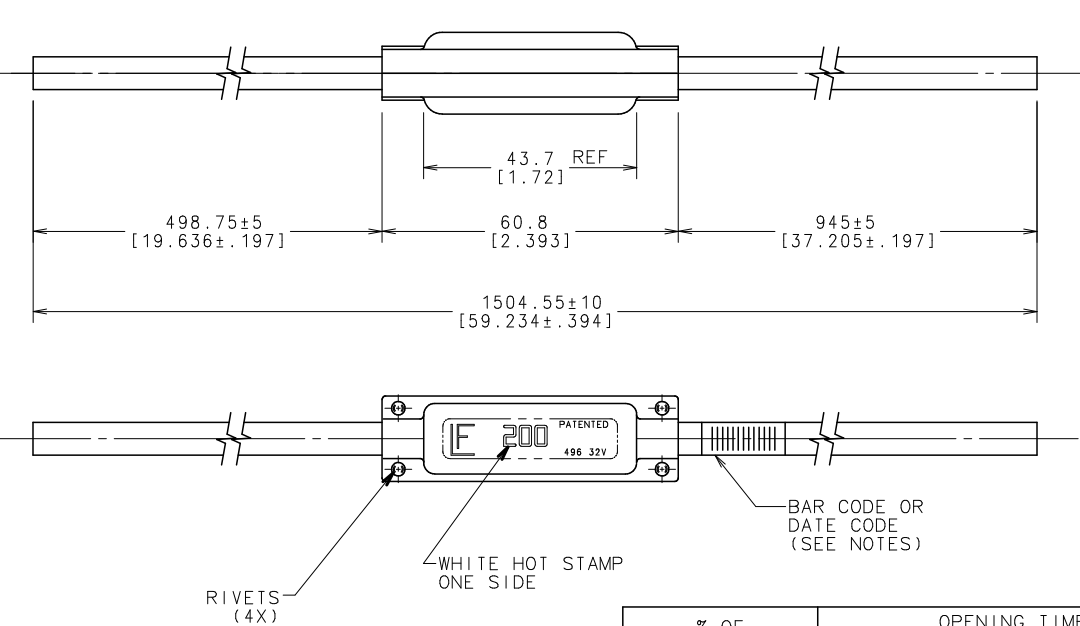


NOTES:

- INTERRUPT RATING: 2000A @ 32VDC
VOLTAGE RATING: 32VDC
TEMP. RATING: -40°C - 150°C
CABLE TYPE: IRRADIATED XLPE, 4 AWG, PER MS-9502 / YPES-25-08-245
SPECIFICATION: MEETS LITTELFUSE'S VS-006013 SPECIFICATION
APPLICATION: DESIGNED FOR UNDERHOOD INSTALLMENT.
BAR CODE OR DATE CODE: THE BAR CODE OR DATE CODE IS USED FOR LOT TRACEABILITY. IT IS ON ONE OF THE CABLE LEADS.

% OF RATING	OPENING TIME	
	MINIMUM	MAXIMUM
100	100 HRS.	-
135	120 S	1800 S
200	10 S	300 S
350	1 S	15 S
600	0.3 S	5 S

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

UNCONTROLLED DOCUMENT

NO		COMPONENT NO		DESCRIPTION		QTY/M		U/M	
BILL OF MATERIAL									
L TR		COPIES TO		MATL SPEC		FINISH		OUTLINE	
		1	9 18	DRW	DHM	DATE	SCALE		
A		2	10 19			DATE	FULL	CABLEPRO	
		3	12 20	CHK		DATE	SUPER DRW		
		4	13 21			DATE			
		5	14 23	APPD		DATE	FINISH GOOD WT		
		6	15 33			GRAMS/PIECE			
		7	16 43	TOLERANCE UNLESS OTHERWISE SPECIFIED					
		8	17 53	TWO PLACE DEC ±.25 [.01] FRACTION ±					
		3RD ANGLE PROJECTION		THREE PLACE DEC ±.100 [.004] ANGULAR ±1°		TITLE			
									
						PERSON		DRWG NO.	
						A		0496200.ZXAF	
		</							