LTR	DATE	REVISION	CHK	APD
A	26/Jun/18	519497GCC-NEW RELEASE FYUE		

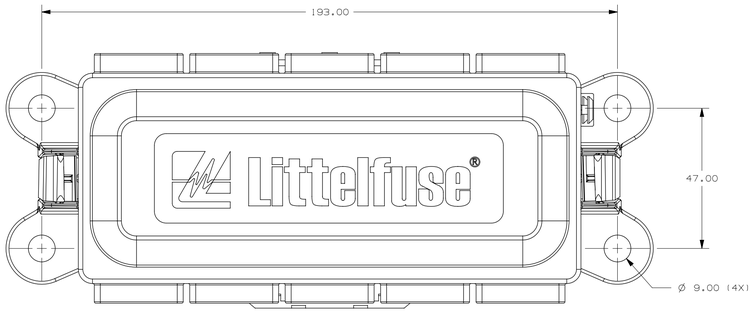

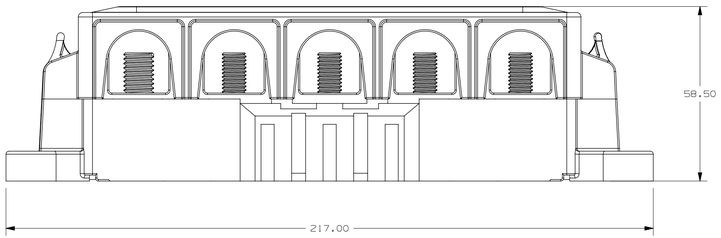



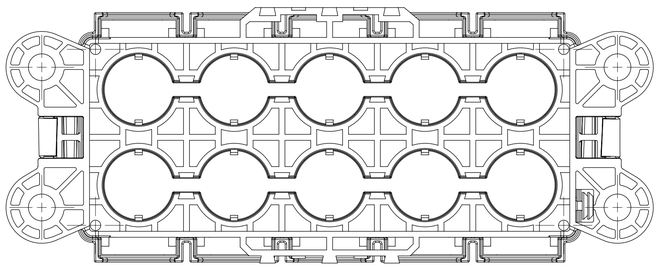

NOTES:

1. MATERIALS:
   BASE/COVER: BLACK FR530
   BUS BAR: C1100 Sn PLATED
   STUD: STEEL Zn/Fe ALLOY PLATED
   BOTTOM CAP: BLUE PA66
   LATCH: YELLOW POM
2. MAX. MAIN INPUT: 400A
3. OPERATING TEMPERATURE RANGE: -40°C TO 85°C
4. M8 MOUNTING TORQUE: 10±2 Nm
5. MAX. WIRE SIZE 105 sqmm OR AWG 4/0.

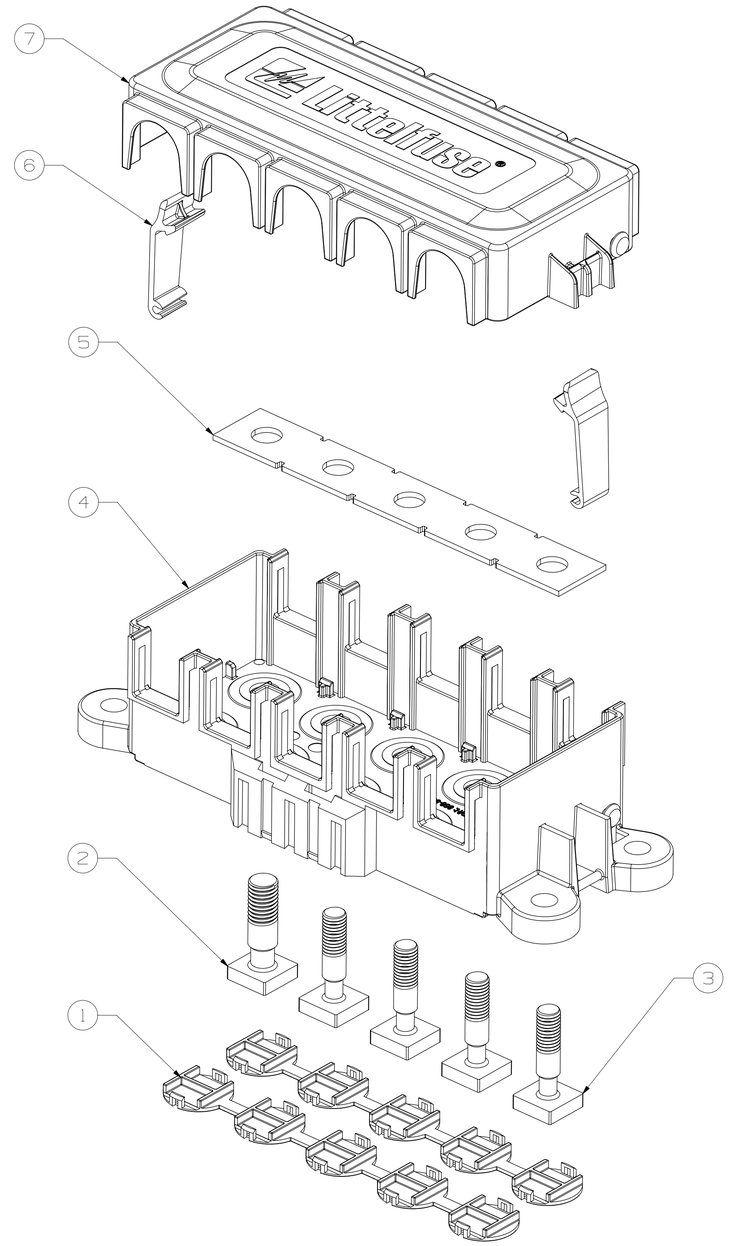

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
7	873-716	COVER	1	EA
6	883-088	LATCH	2	EA
5	882-869-5	BUS BAR	5	EA
4	868-967	BASE	1	EA
3	908-067	M8 STUD	4	EA
2	908-068	M10 STUD	1	EA
1	883-094	BOTTOM CAP	2	EA

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

D

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

MATL SPEC: SEE NOTE

FINISH: SEE NOTE

DRW FYUE	DATE 26/Jun/18	SCALE 1:1
CHK	DATE	SUPER DR
APPD	DATE	FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

DIMENSION	0.5 - 3	OVER 3 UP TO 6	OVER 6 UP TO 30	OVER 30 UP TO 120	OVER 120 UP TO 400
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5

3RD ANGLE PROJECTION

TITLE: UNSEALED 4-WAY ZCASE FUSE BOX

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION	DRWG. NO.	OUTLINE
A	OFHZ0001Z	

METRIC ASSEMBLY

CAD GENERATED DRAWING – NO PENCIL CHANGES ALLOWED