CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART No.	WIRE GA./ COLOR	"A"
0FNY0001ZXJ	#14 BLACK	203.2±5 (8.0)

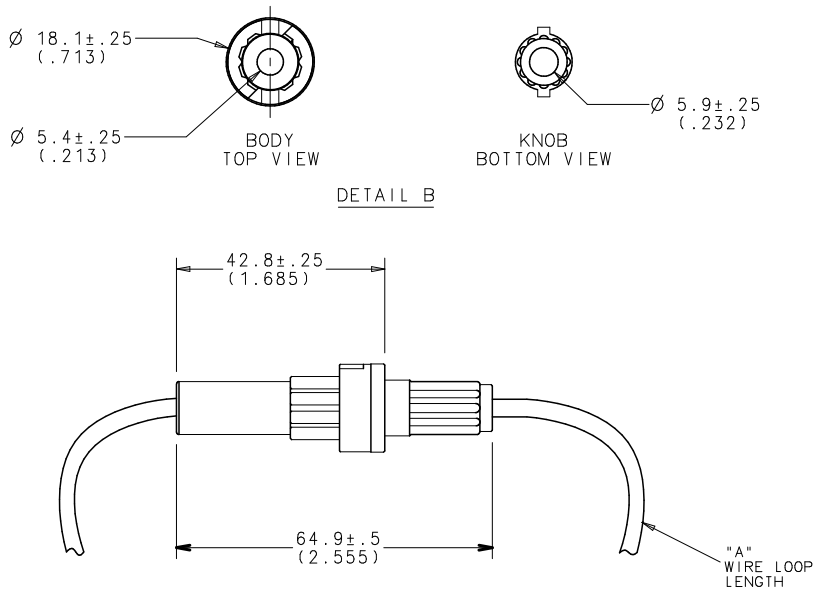

NOTES:
1. MAX FUSE RATING: 20A, 32VDC.
2. MAX. OPERATING TEMPERATURE: 80°C.
3. WIRE: COPPER STRANDED, UL 1015.
4. CONTACTS: C2680 ALLOY.
5. CRIMP: MUST MEET USCAR 21 STANDARD.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

CC DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS,-MINIMUM CP VALUE (MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

UNCONTROLLED DOCUMENT

COPIES TO		
1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC | FINISH

		DATE	SCALE	1=1
DRW	DHM	09/05/08		
CHK		DATE	SUPER DRW	
APPD		DATE	RAW STK WT	LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

TITLE FUSEHOLDER, INLINE (WITH FUSE)

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION A | DRWG. NO. 0FNY0001ZXJ | OUTLINE

LTR	REVISION	CHK	APD
A	000490ER-RELEASED 9/05/08		