

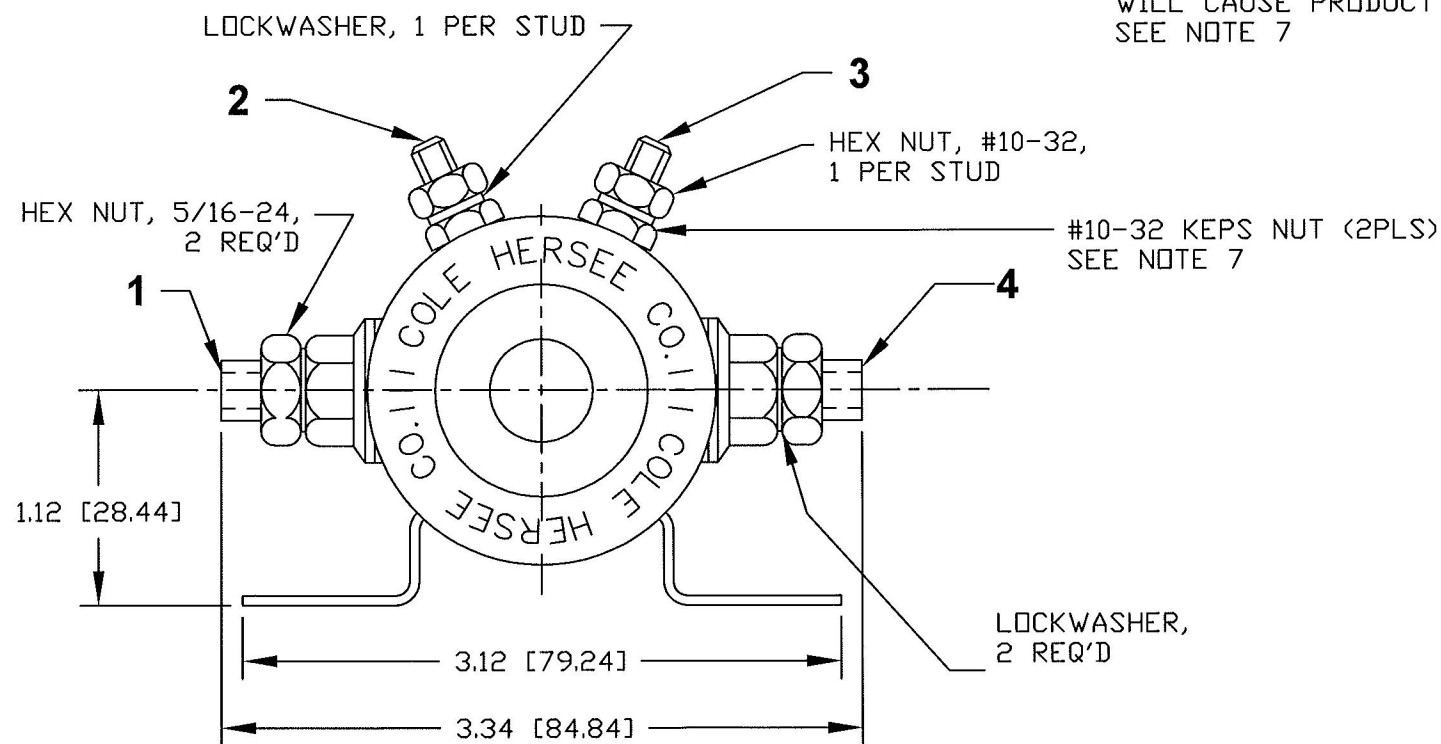


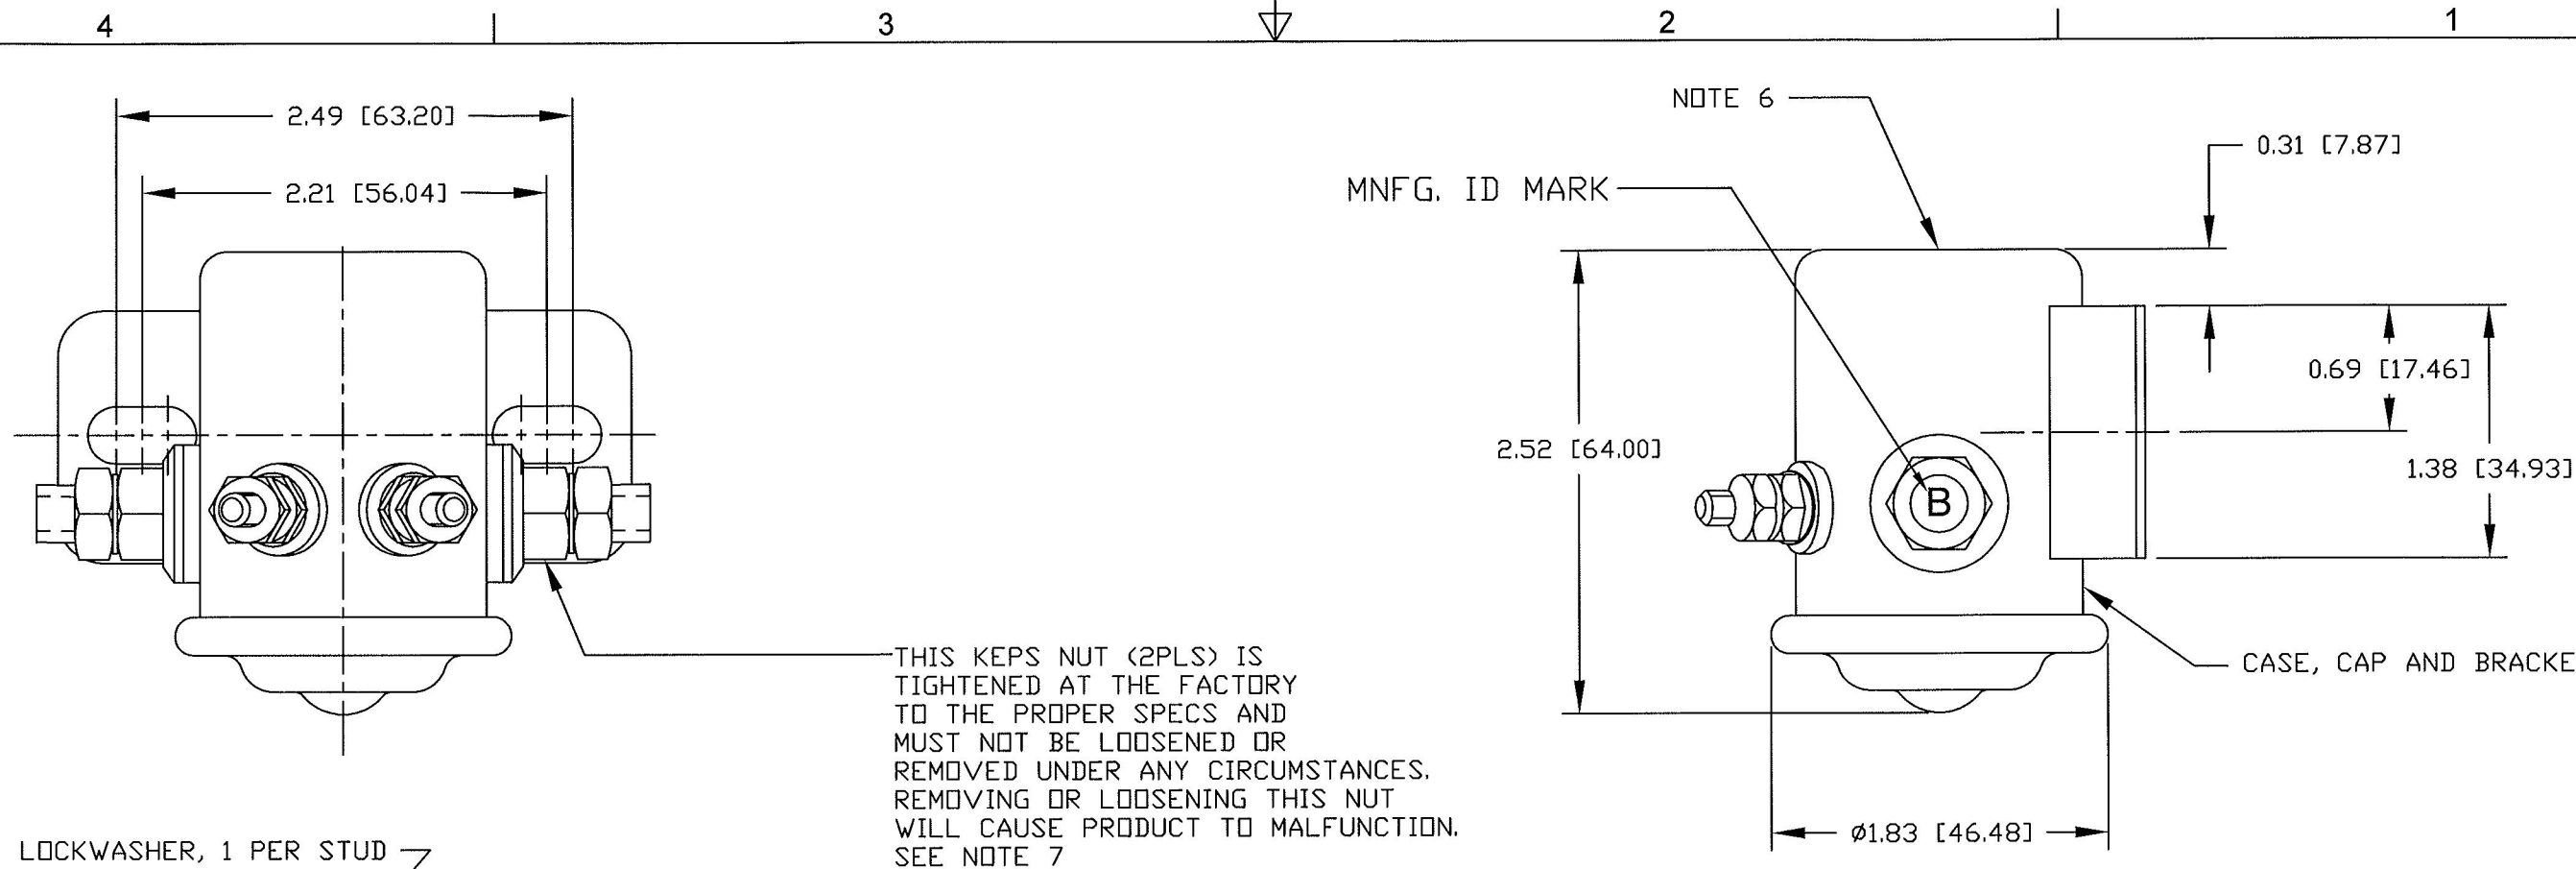

SCHEMATIC



NOTES:

1. ALL STEEL PARTS PLATED.
2. ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED
3. ELECT. RATING: 200A @ 24Vdc, CONTINUOUS. COIL RESISTANCE: 71 OHMS.
4. MAX TORQUE FOR CUSTOMER APPLIED NUTS TO BE: #10-32= 15 IN-LBS (1.69 N.m); 5/16-24= 35 IN-LBS (3.95 N.m)
5. ALL CONTACTS ARE SILVER LAMINATED.
6. PART NUMBER, DATE CODE & VOLTAGE INK STAMPED ON BOTTOM OF SOLENOID
7. 5/16 AND #10-32 KEPS NUTS MUST NEVER BE REMOVED OR LOOSENED. THEY ARE FACTORY-TORQUED TO PROPER SPECS.

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances:			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.	Special Characteristics:		 Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com
Rev.	Description of Change	ECN No.	Date					2-places +/- 0.02"	3-places +/- 0.005"	Angular +/- 1°		 Critical Characteristic, relating to Safety and/or Regulatory Compliance	 Significant Characteristic relating to Process Control	
A	NEW NUMBER RELEASE	11200	6/27/11									 Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer	Description: SOLENOID, N/O, 24V	
													Drawing / Part No.: 24214	Current Rev. A
								FORM CHT-6 (2/07)	Used On or Ref.:	24144	Scale: 1:1	Drawn BY: G.Auguste	Date Drawn: 6/27/11	Pg. 1 of 1