
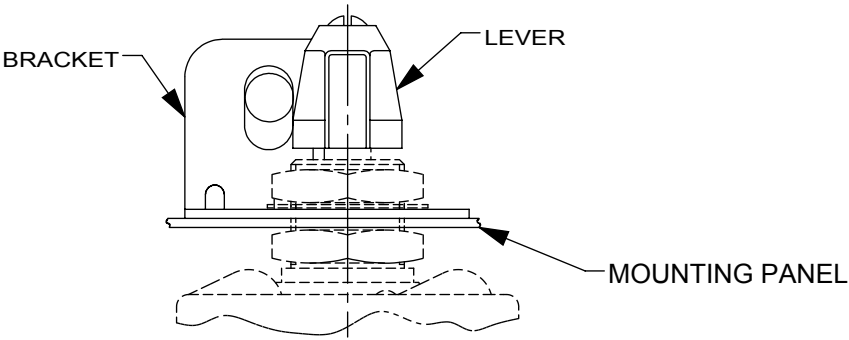


THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	GCF #519740 INITIAL RELEASE	04/09/2019	J. LI

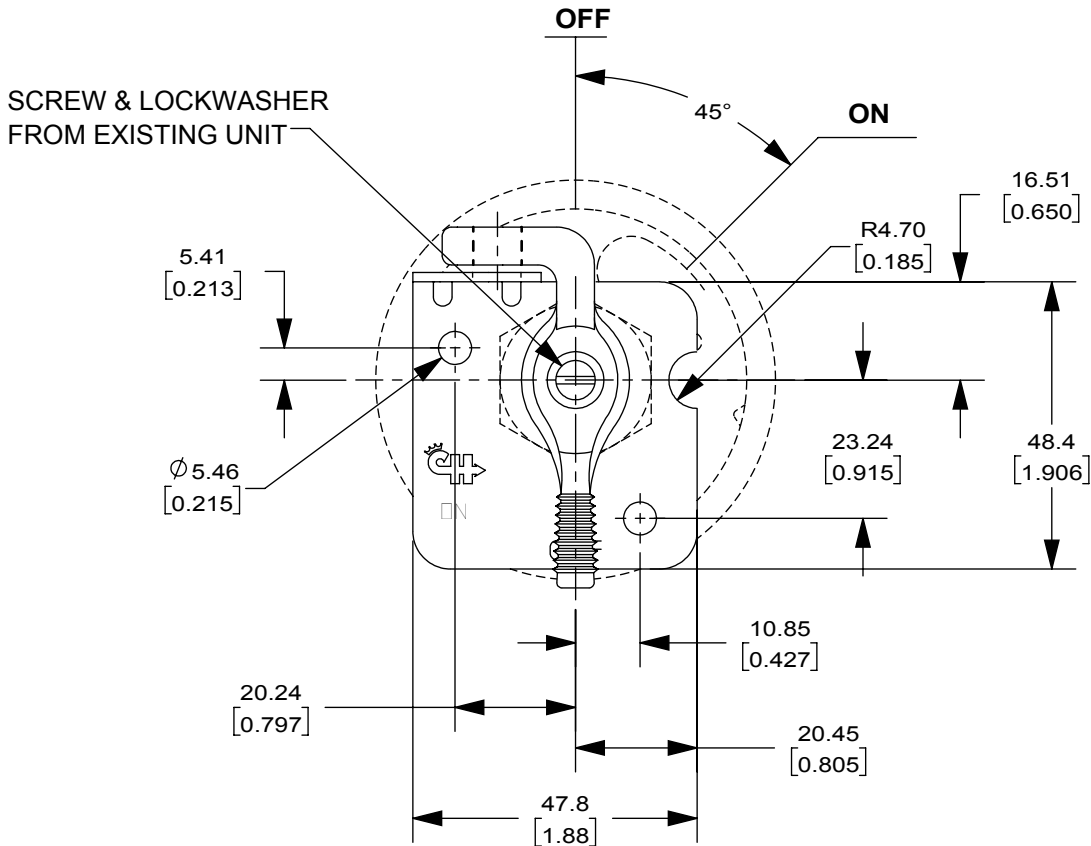

- NOTES
1. BRACKET AND LEVER POWDER COATED, COLOR REFER TO CHART
 2. ALL DIMENSIONS ARE REFERENCE ONLY
 3. LOCK OUT BRACKET, LEVER, TWO MOUNTING SCREWS & INSTRUCTION SHEET SHIPPED IN PLASTIC BAG
 4. FOR USE WITH 0.312 [7.93] DIAMETER LOCK SHANK

P/N	COLOR	REMARK
24505-02	RED	
24505-03	YELLOW	
24505-04	CHROME	

INTERPRET DRAWING TO ANSI/ASME Y14.5-1994.

	FIT/ FUNCTION CRITICAL CHARACTERISTICS SYMBOL
<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

DIMENSION: MM TOLERANCES UNLESS OTHERWISE SPECIFIED
ONE PLACE DECIMAL ± 0.5 THREE PLACES DECIMAL ± 0.100
TWO PLACES DECIMAL ± 0.20 ANGULAR ± 2°

	NAME	DATE	 Expertise Applied Answers Delivered		
DRAWN	J. LI	06/20/2018			
CHECKED	-	-	TITLE LOCK OUT KIT FOR MASTER DISCONNECT SW		
	-	-			
	-	-	FORM NO: CVP-PE40-0004 REV A THIRD ANGLE PROJECTION		
	-	-			
			SIZE B	DWG. NO. 24505-02, CHART	REV. A
DO NOT SCALE DRAWING	SCALE 1:1			SHEET 1 OF 3	