


4

3

2

1

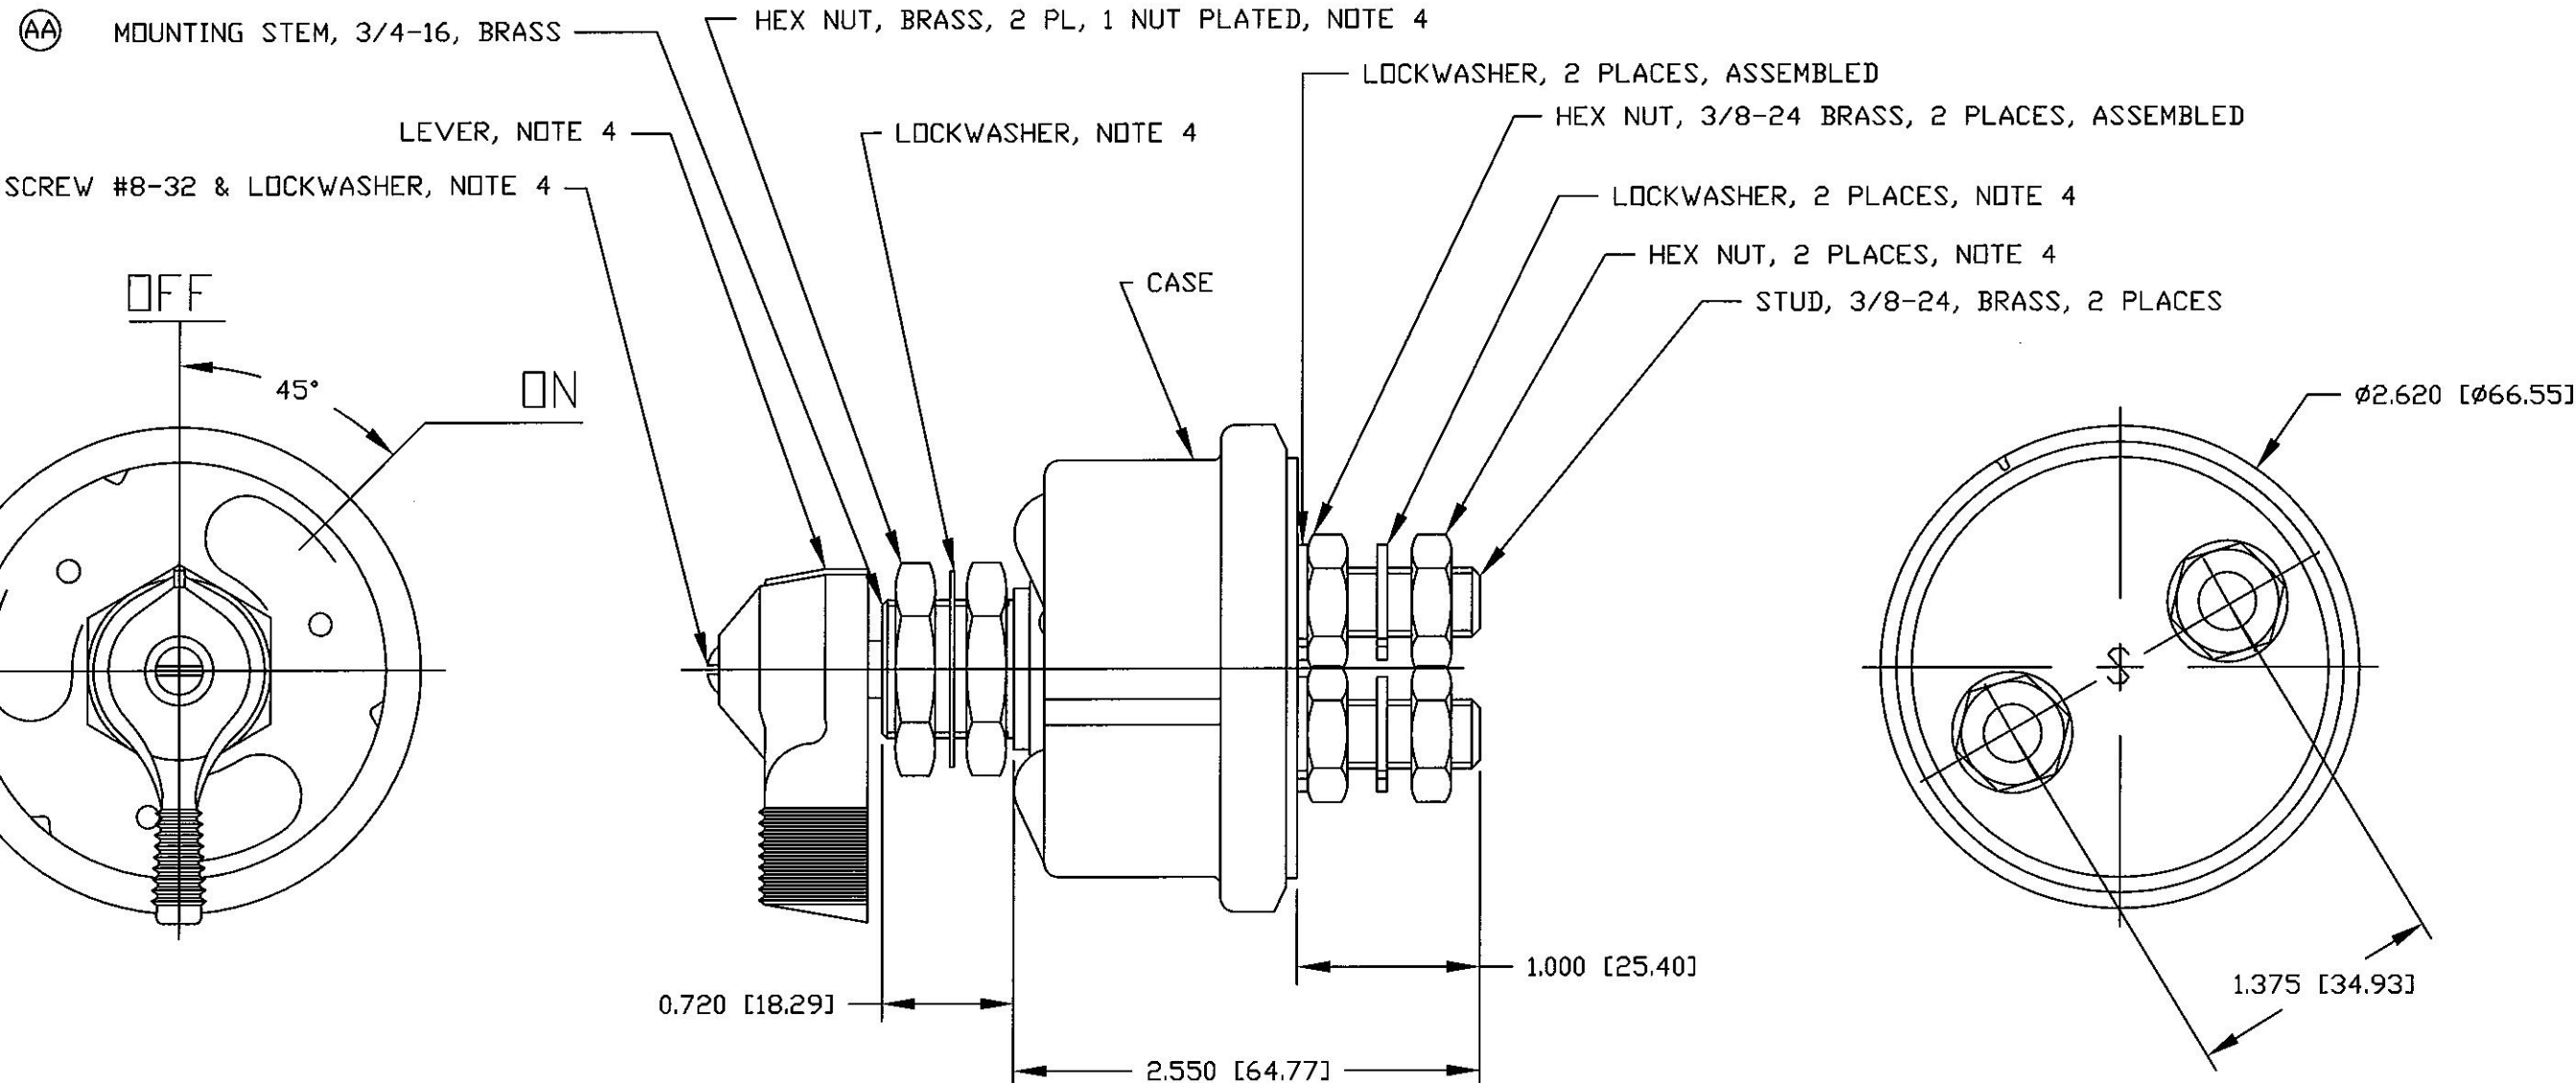

NOTES:

1. SILVER CONTACT SURFACES
2. ALL STEEL PARTS PLATED
3. ALL DIMENSIONS REF. ONLY
4. PARTS MAY BE ASSEMBLED OR SUPPLIED IN A BAG
5. RATING:
CONTINUOUS - 175 AMPS 6-12-24-36 V DC
INTERMITTENT-1000 AMPS MAX 6-12-24-36 V DC 15 SECONDS 'ON' 5 MINUTES 'OFF'
6. TORQUE SPECIFICATIONS:
MOUNTING STEM NUTS: 20 FT LBS [27 N.m] MAX
3/8" NUTS 70-90 IN LBS [8-10 N.m]

①

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances:			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.			Special Characteristics:			Cole Hersee Co.		
Rev.	Description of Change	ECN No.	Date					2-places +/- 0.02"	3-places +/- 0.005"	Angular +/- 1°				CC Critical Characteristic, relating to Safety and/or Regulatory Compliance			20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com		
AA	REVISED NOTES	08680	11/24/08											X Significant Characteristic relating to Process Control			Description: SWITCH, MASTER DISCONNECT		
														KC Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer			Drawing / Part No.: 2484-A		
																	Current Rev. AA		
																	Pg. 1 of 1		
																	Scale: 1:1		
																	Date Drawn: 12/27/55		
																	Drawn BY: PJS		
																	FORM CHT-6 (2/07)		
																	Used On or Ref.:		

4

3

2

1