

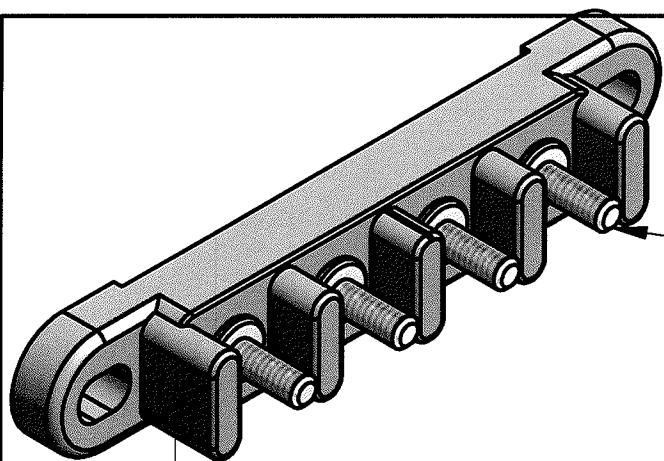


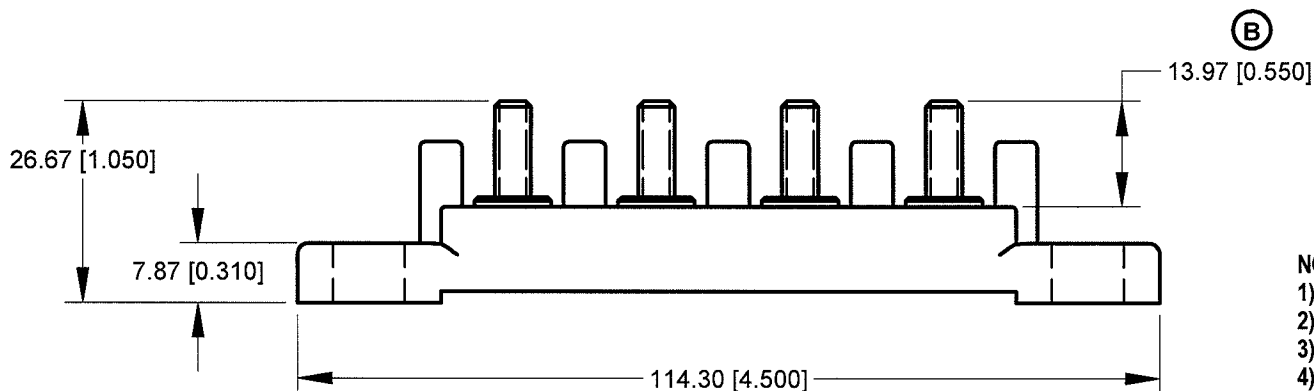

STUD: 10-24 UNC, TYP, 4PLS.
STEEL, ZINC PLATED

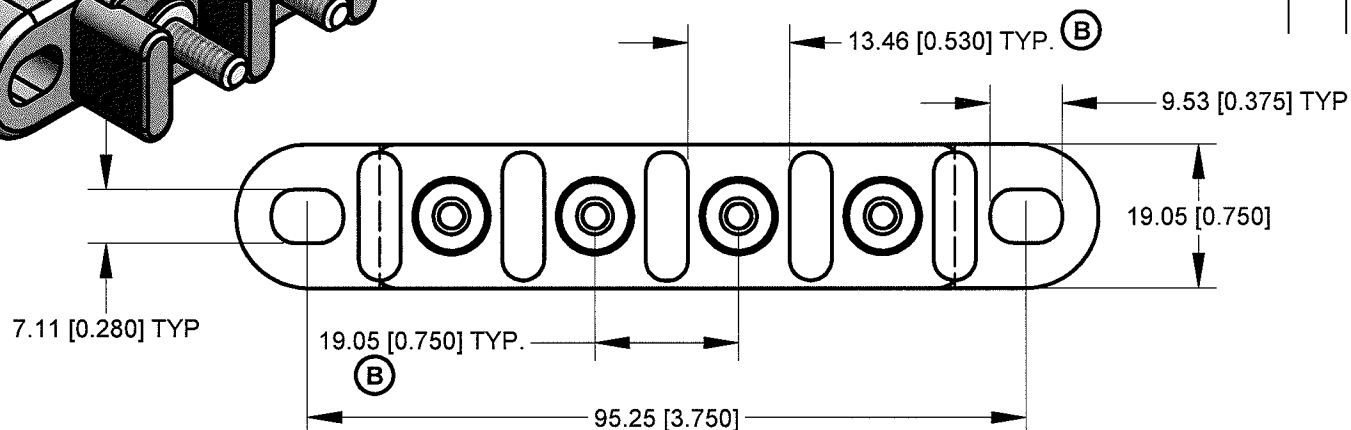

Revision Control Record

Rev.	Description of Change	ECN No.	Date
B	UPDATED DRAWING TO 3D	13094	3/20/13

- NOTES.**
- 1) INSULATOR MATERIAL: THERMOPLASTIC, BLACK
 - 2) TEMPERATURE RATING: 250°F (120°C)
 - 3) STUDS: 10-24; TORQUE RATING: 25 IN-Lbs (2.8 N.m) MAX.
 - 4) MOUNTING TORQUE SPEC: 24 IN-Lbs (2.7 N.m) MAX.
 - 5) ELECTRICAL RATING: 30A PER STUD; 600 VOLTS

Note: unless noted otherwise all dimension are **AFTER** plating
Tolerances Unless otherwise specifically noted, the following
are default tolerances;

2-places **3-places** **Angular**
+/- 0.50[0.02] **+/- 0.13[0.005]** **+/- 1°**

Unless otherwise specified dimensions are in millimeters
Dimensions in brackets [] are in inches

"REF" = Non-Toleranced Reference Dimension, shown for
clarification purposes only.

NOTE: All tolerances are Non-Cumulative.

PROPRIETARY INFORMATION

All information contained
herein, is proprietary to the
Cole Hersee Company.
Unauthorized use or
reproduction is prohibited.

3RD ANGLE
PROJECTION

Special Characteristics:

☒ **Critical Characteristic, relating to
Safety and/or Regulatory Compliance**

☒ **Significant Characteristic relating to
Process Control**

☒ **Control Dimension relating to Form -
Fit - Function as defined by Cole
Hersee Company and/or the Customer**



Littelfuse®

Phn: 617-268-2100 Web: www.colehersee.com

**Description: TERMINAL BLOCK,
4P**

**Drawing /
Part No.: 4758**

Current Rev.

B

FORM CHT-6 (1/12)

Used On
or Ref.:

Scale: **1:1**

Drawn By: **G. Auguste**

Date
Drawn: **3/19/13**

Pg. 1 of 1