

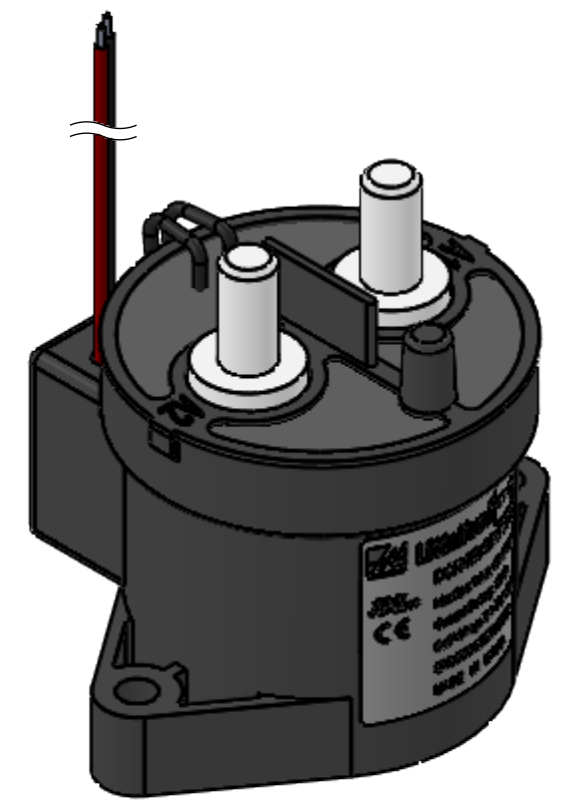




REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PCO-500000301372 INITIAL RELEASE	AUG./22/2025	D. ZHANG

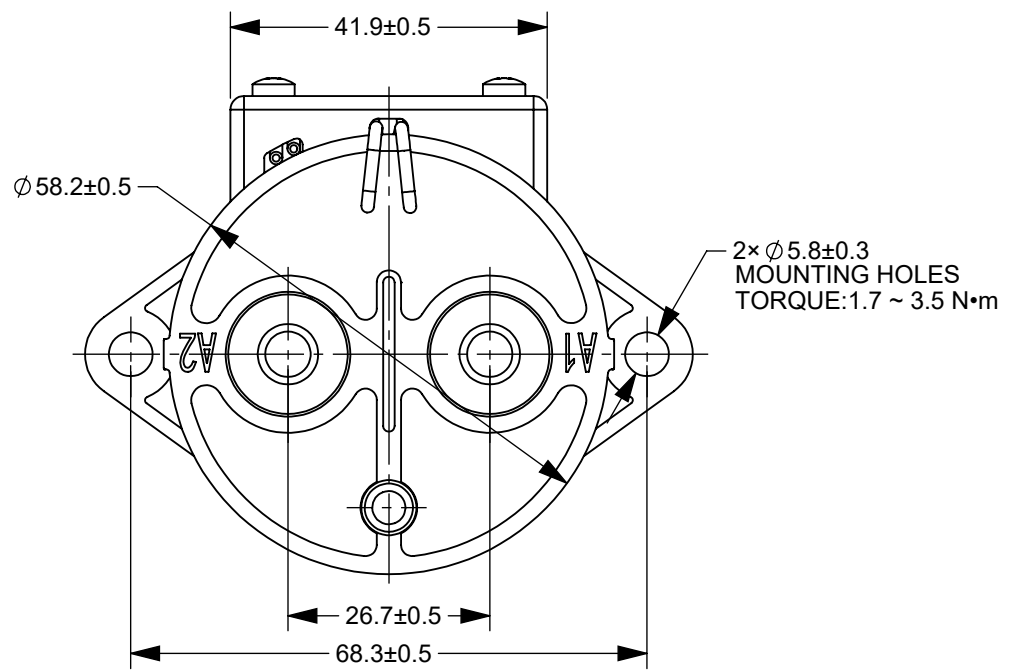


DCNHE150NF SERIES SCHEMATIC CIRCUIT DIAGRAM

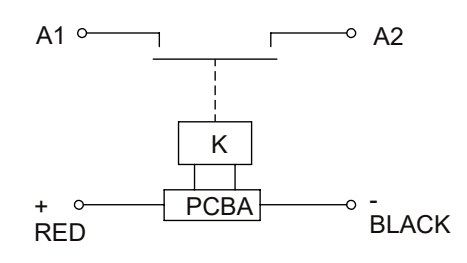

WIRE OF COIL, UL1887 20AWG  
THE RED WIRE CONNECTS "+"  
THE BLACK WIRE CONNECTS "-"

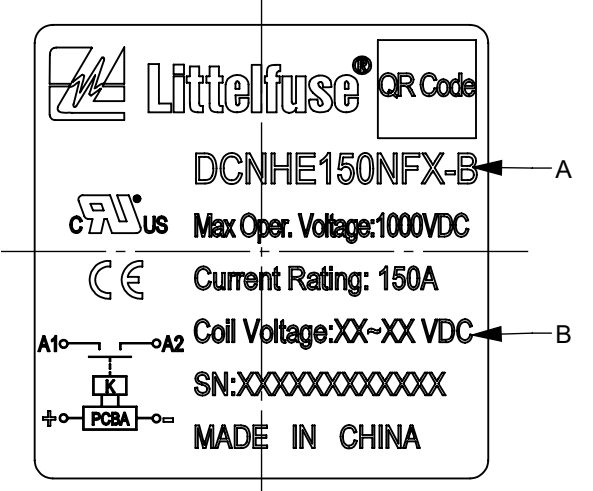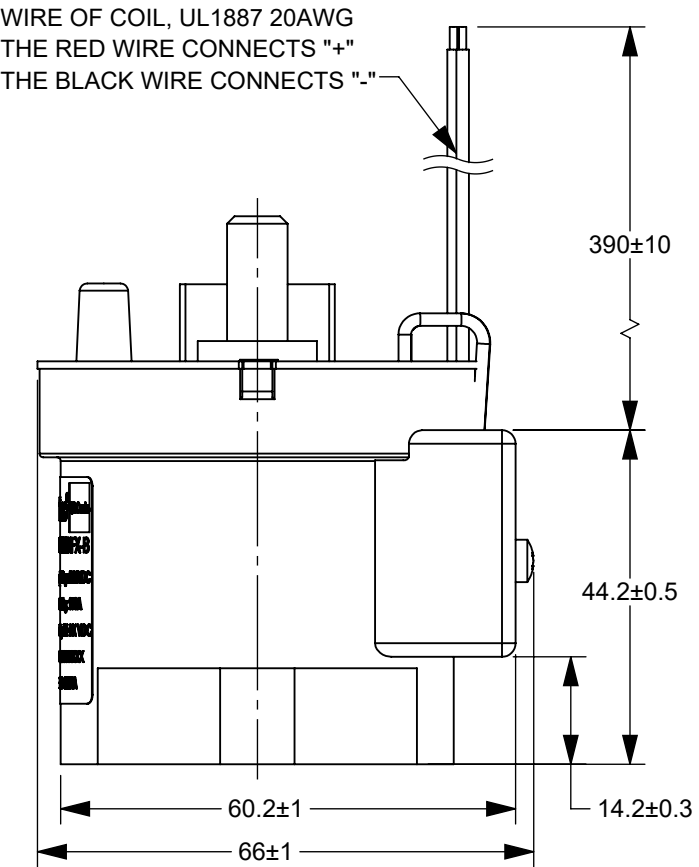

VIEW 1 SCALE 2:1

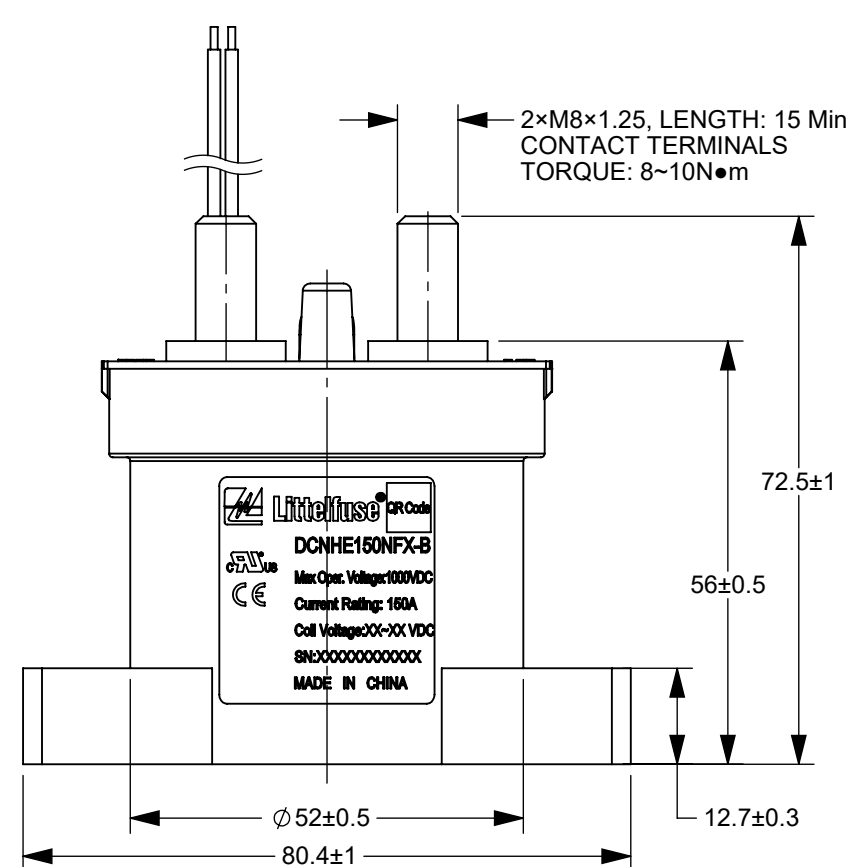

PN		DCNHE150NFA-B
MAX. OPERATING VOLTAGE		1,000V DC
RATED CONTACT CURRENT		150A
COIL VOLTAGE		12~36V DC
OPERATING VOLTAGE IN COLD STATE@25°C	PICK-UP	8~9V DC
	RELEASE	5~7V DC
STARTING CURRENT@25°C		2.4A@12V DC; 2A@24V DC
HOLDING POWER@25°C		APPROX. 2.5W
VOLTAGE DROP		≤80mV@150A
Max. BREAKING CURRENT		2,000A@320V DC, 1CYCLE
INSULATION RESISTANCE@500V DC(INITIAL)		≥100MΩ
DIELECTRIC STRENGTH (LEAKAGE CURRENT≤1 mA)	BETWEEN CONTACTS	4,000V AC, 1 MINUTE
	BETWEEN CONTACTS AND COIL	2,200V AC, 1 MINUTE
ELECTRIC LIFE (RESISTIVE LOAD)		6,000 CYCLES (150A@450V DC)
		2,000 CYCLES (150A@750V DC)
		1,000 CYCLES (100A@1000V DC)
MECHANICAL LIFE (NO LOAD, CYCLES)		300,000

NO.	PN	"A"	"B"	CERTIFICATIONS	REMARK
1	DCNHE150NFA-B	DCNHE150NFA-B	Coil Voltage:12~36VDC	UL,CE	NAMEPLATE:VIEW 1
2					

- NOTES:
- ALL DIMENSIONS ARE REFERENCE ONLY.
  - CONTACTOR PARAMETERS ARE SHOWN IN TABLE 1, CERTIFICATIONS INFORMATION ARE SHOWN IN TABLE 2.
  - SEE TABLE 2 FOR NAME PLATE AND PNs.
  - PRODUCT TYPE: SPST-NO, NON-POLAR CONTACTOR.
  - MATERIALS AND FINISH:
    - HOUSING: THERMOPLASTIC PLASTICS.
    - CONTACTS: SILVER-PLATED COPPER.
    - CONTACT STUDS: SILVER-PLATED COPPER.
  - WEIGHT: ABOUT 450GRAMS.
  - RoHS COMPLIANT.
  - THE COIL OF THE CONTACTOR IS POLAR, SO THE CONNECTION OF THE COIL SHOULD BE OPERATED ACCORDING TO THE SCHEMATIC CIRCUIT DIAGRAM.

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSIA/SME Y14.5-1994.

PER CHNFPD20-008 PROCEDURE	●	FTI/ FUNCTION CRITICAL CHARACTERISTICS
	<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
	CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
	(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
	CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

DRAWN	JY. SHI	DATE	MAY./19/2025
CHECKED	V. ZHANG		MAY./16/2025
Expertise Applied   Answers Delivered			
FORM NO. CVP-PE40-0005 REV B		TITLE	
THIRD ANGLE PROJECTION		DCNHE NON-POLAR CONTACTOR	
SIZE	C	DWG. NO.	OL-DCNHE150NFX-B, CHT
DO NOT SCALE DRAWING	SCALE 1:1	REV.	A
			SHEET 1 OF 1