IXSJ80N120R1K

1200 V, 18 mΩ, 80 A SiC Power MOSFET

RoHS HF E153432

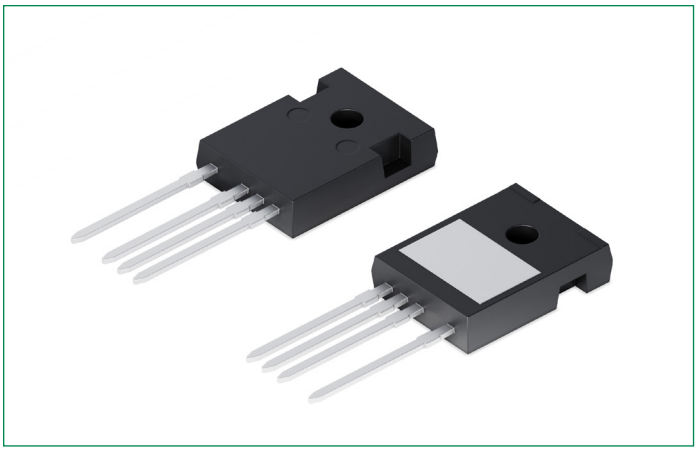

Pinout Diagram (ISO247-4L)

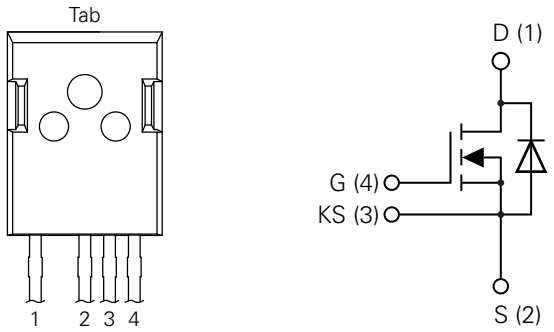

1: Drain; **2:** Source; **3:** Kelvin Source; **4:** Gate; **Tab:** Isolated

Features

- Up to 1200 V blocking voltage with low $R_{DS(on)}$ of 18 mΩ
- Low gate charge of 155 nC and low input capacitance of 4556 pF
- Flexible gate voltage range (15–18 V) and 0 V recommended turn-off gate voltage

Benefits

- Low conduction losses and reduced heat dissipation
- Low gate drive power requirements
- Supports high-speed switching with reduced gate drive losses

ISO247-4L Package

- High performance ceramic based isolated package improves overall thermal resistance $R_{th(j-h)}$ and power handling capability
- Isolation voltage 2500 V AC (RMS), 1 minute
- Reduced EMI attributed to the small chip-to-heatsink stray capacitance
- Industry standard package outline
- Optimized package with separate driver source pin

Applications

- EV charging infrastructure
- Solar inverters
- Switch mode power supplies
- Uninterruptible power supply
- Motor drives
- DC/DC converters
- Battery chargers
- Induction heating
- High-frequency applications

Product Summary

Characteristic	Value	Unit
I_{D25}	80	A
V_{DSS}	1200	V
$R_{DS(on)\ typ}$	18	mΩ

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Maximum Ratings (T_{vj} = 25 °C unless otherwise specified)

Symbol	Characteristics	Conditions		Value Min.	Value Typ.	Value Max.	Unit
V_{DSS}	Drain-source voltage	V_{GS} = 0 V, I_D = 9.9 mA, T_{vj} = 25 °C		–	1200	–	V
V_{GSM}	Maximum gate-source voltage	Gate-source voltage (DC)		–4	–	+21	V
	Transient gate-source voltage	Transient, $t_{transient}$ < 300 ns		–4	–	+23	V
I_D	Drain current	V_{GS} = 18 V	T_c = 25 °C	–	85	–	A
			T_c = 80 °C	–	63	–	
			T_c = 100 °C	–	54	–	
I_{DM}	Peak drain current	T_c = 25 °C, pulse width limited by $T_{vj(max)}$		–	157	–	A
I_S	Diode forward current	V_{GS} = 0 V , T_c = 25 °C		–	37	–	A
I_{SM}	Body-diode surge forward current	Pulse width limited by $T_{vj(max)}$		–	85	–	A
P_{tot}	Total power dissipation	T_c = 25 °C		–	223.2	–	W
T_{vj}	Virtual junction temperature range	–		–40	–	+150	°C
$T_{vj(max)}$	Maximum virtual junction temperature	–		–	150	–	°C
T_{stg}	Storage temperature range	–		–40	–	+150	°C
F_C	Mounting force with clip	–		0.8	–	1.2	Nm
T_{sold}	Soldering temperature	3 mm (1/8 in.) from case 10 s		–	260	–	°C
$d_{Spp/App}$ $d_{Spb/Apb}$	Creepage distance on surface / Clearance distance through air	Terminal to terminal	Between pin 1 to 2	3.88	–	–	mm
			Between pin 2 to 3	1.34	–	–	
			Between pin 3 to 4		–	–	
	Clearance distance through air	Terminal to backside plane	For all Terminals	2.4	–	–	
	Creepage distance on surface	Terminal to backside tab		5.26	–	–	
V_{ISOL}	Isolation voltage	50/60 Hz; RMS; I_{ISOL} < 1 mA, t = 1 second		–	3000	–	V
		50/60 Hz; RMS; I_{ISOL} < 1 mA, t = 1 minute		–	2500	–	
M	Package weight	–			8		g

Recommended Values

Symbol	Characteristics	Conditions	Value	Unit
$V_{GS(on)}$	Recommended turn-on gate-source voltage	–	18	V
$V_{GS(off)}$	Recommended turn-off gate-source voltage	–	0	V

Thermal Characteristics

Symbol	Characteristics	Conditions	Value Min.	Value Typ.	Value Max.	Unit
$R_{th(j-c)}$	Thermal resistance, junction-to-case	–	–	–	0.56	K/W

Electrical Characteristics – Static (T_{vj} = 25 °C unless otherwise specified)

Symbol	Characteristics	Conditions		Ratings Min.	Ratings Typ.	Ratings Max.	Unit
$V_{(BR)DSS}$	Breakdown voltage, drain-source	V_{GS} = 0 V, I_D = 9.9 mA, T_{vj} = 25 °C		1200	–	–	V
$V_{GS(TH)}$	Gate threshold voltage	V_{GS} = V_{DS}, I_D = 22.2 mA	T_{vj} = 25 °C	2.8	–	4.8	V
			T_{vj} = 150 °C	–	2.8	–	
I_{DSS}	Zero gate voltage drain current	V_{DS} = 1200 V, V_{GS} = 0 V	T_{vj} = 25 °C	–	1	80	µA
			T_{vj} = 150 °C	–	35	–	
$I_{GSS,F}$	Gate leakage current	V_{GS} = 21 V, V_{DS} = 0 V		–	–	100	nA
$I_{GSS,R}$		V_{GS} = –4 V, V_{DS} = 0 V		–	–	–100	
$R_{DS(on)}$	Drain-source on-state resistance	I_D = 40 A, V_{GS} = 18 V	T_{vj} = 25 °C	–	18	23.4	mΩ
			T_{vj} = 150 °C	–	36	–	
$R_{g(int)}$	Internal gate resistance	Resonance method, drain-source shorted[1]		–	1	–	Ω
g_{fs}	Transconductance	V_{DS} = 10 V, I_D = 42 A		–	27	–	S

Note 1: For a description of the resonance method for measuring R_g, refer to the JEDEC Standard JESD24-11 test method

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Electrical Characteristics – Dynamic (T_{vj} = 25 °C unless otherwise specified)

Symbol	Characteristics	Conditions		Ratings Min.	Ratings Typ.	Ratings Max.	Unit
C_{iss}	Input capacitance	V_{DD} = 800 V, V_{GS} = 0 V, f = 1 MHz		–	4556	–	pF
C_{oss}	Output capacitance			–	135	–	
C_{rss}	Reverse transfer capacitance			–	9	–	
Q_g	Total gate charge	V_{DD} = 800 V, I_D = 42 A, V_{GS} = 0/+18 V, $R_{g(ext)}$ = 3.3 Ω, L = 250 µH FWD: Body diode		–	155	–	nC
Q_{gs}	Gate-source charge			–	44	–	
Q_{gd}	Gate-drain Charge			–	30	–	
E_{oss}	Output capacitance charge energy	V_{DS} = 800 V, V_{GS} = 0 V, f = 1 MHz		–	43	–	µJ
$t_{d(on)}$	Turn-on delay time	**Inductive Switching** Free Wheeling Diode: Body Diode V_{DD} = 800 V, V_{GS} = 0/+18 V, I_D = 42 A, $R_{g(ext)}$ = 3.3 Ω	T_{vj} = 25 °C	–	18	–	ns
			T_{vj} = 150 °C	–	17	–	
t_r	Rise time		T_{vj} = 25 °C	–	22	–	
			T_{vj} = 150 °C	–	20	–	
t_{on}	Turn-on time		T_{vj} = 25 °C	–	41	–	
			T_{vj} = 150 °C	–	36	–	
E_{on}	Turn-on energy		T_{vj} = 25 °C	–	504	–	µJ
			T_{vj} = 150 °C	–	459	–	
$t_{d(off)}$	Turn-off delay time		T_{vj} = 25 °C	–	48	–	ns
			T_{vj} = 150 °C	–	58	–	
t_f	Fall time		T_{vj} = 25 °C	–	10	–	
			T_{vj} = 150 °C	–	10	–	
t_{off}	Turn-off time		T_{vj} = 25 °C	–	59	–	
			T_{vj} = 150 °C	–	68	–	
E_{off}	Turn-off energy		T_{vj} = 25 °C	–	205	–	µJ
			T_{vj} = 150 °C	–	212	–	
E_{tot}	Total switching energy		T_{vj} = 25 °C	–	709	–	µJ
			T_{vj} = 150 °C	–	671	–	

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Reverse Diode Characteristics (T_{vj} = 25 °C unless otherwise specified)

Symbol	Characteristics	Conditions		Ratings Min.	Ratings Typ.	Ratings Max.	Unit
V_{SD}	Forward voltage drop	I_{SD} = 42 A, V_{GS} = 0 V		–	3.4	–	V
		I_{SD} = 42 A, V_{GS} = 0 V, T_{vj} = 150 °C		–	3.7	–	
t_{rr}	Reverse recovery time	V_R = 800 V, V_{GS} = 0 V, I_F = 40 A MOSFET gate drive: V_{GS} = 0 / +18 V; $R_{g(ext)}$ = 3.3 Ω	T_{vj} = 25 °C	–	13	–	ns
			T_{vj} = 150 °C	–	13	–	
Q_{rr}	Reverse recovery charge		T_{vj} = 25 °C	–	303	–	nC
			T_{vj} = 150 °C	–	328	–	
I_{rrm}	Max. reverse recovery current		T_{vj} = 25 °C	–	40	–	A
			T_{vj} = 150 °C	–	41	–	
di_F/dt	Current slew rate		T_{vj} = 25 °C	–	4918	–	A/µs
			T_{vj} = 150 °C	–	5398	–	
$E_{rec(off)}$	Turn-off energy of intrinsic diode per pulse	Inductive load, V_{DD} =800 V, V_{GS} = 0/+18 V, I_S =42 A, $R_{g(ext)}$ = 3.3 Ω, L = 250 µH	T_{vj} = 25 °C	–	121	–	µJ
			T_{vj} = 150 °C	–	139	–	

Note 1: Pulse width limited by $T_{vj(max)}$

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Characteristic Curves

Fig. 1. Typical Transfer Characteristics

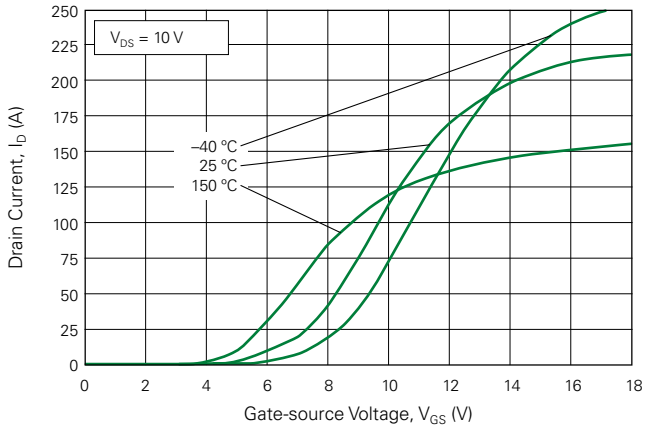

Fig. 2. Typical Transconductance

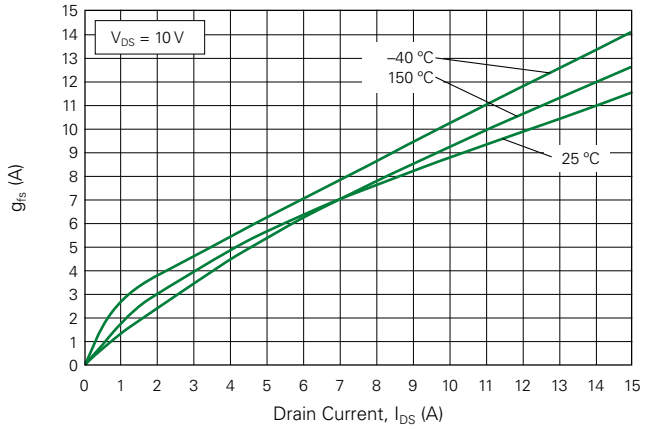

Fig. 3. Typical Output Characteristics @ T_{vj} = 25 °C

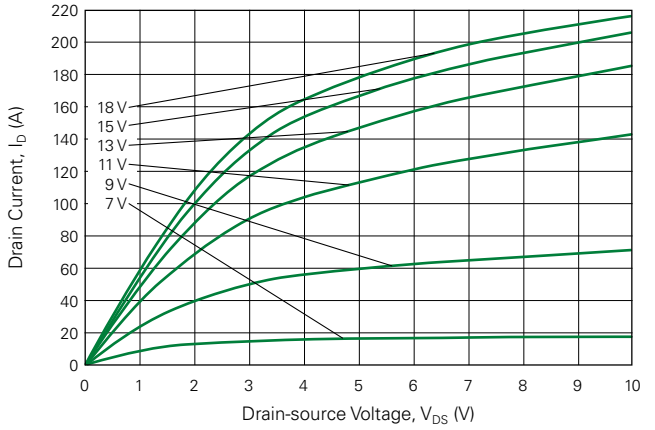

Fig. 4. Typical Output Characteristics @ T_{vj} = 150 °C

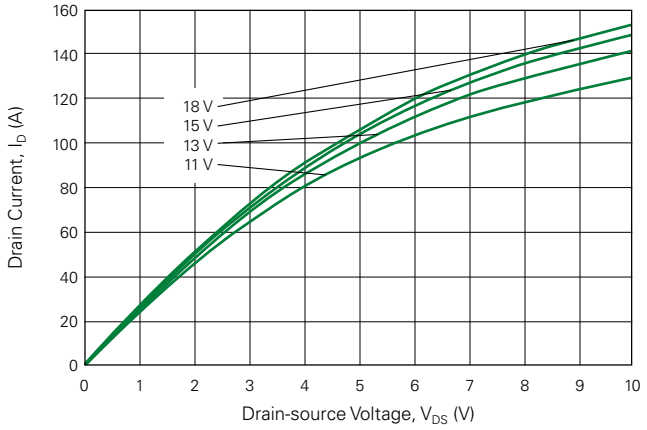

Fig. 5. Typical Output Characteristics @ T_{vj} = –40 °C

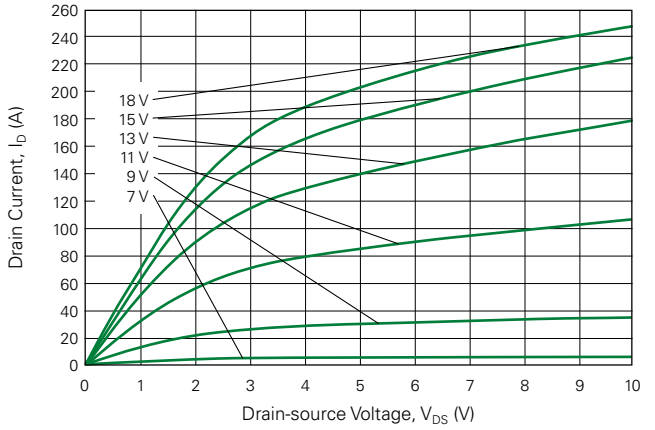

Fig. 6. $R_{DS(on)}$ Normalized to I_D = 12 A vs. Drain Current

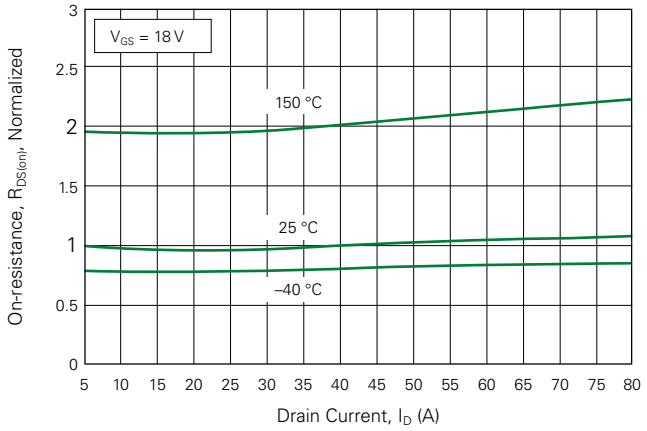

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Fig. 7. $R_{DS(on)}$ Normalized to I_D = 12 A vs. Junction Temperature

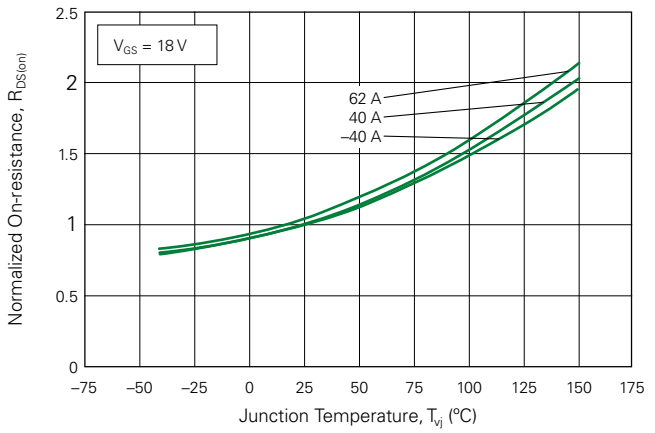

Fig. 8. Typical Drain-source On-state Resistance vs. Gate-source Voltage

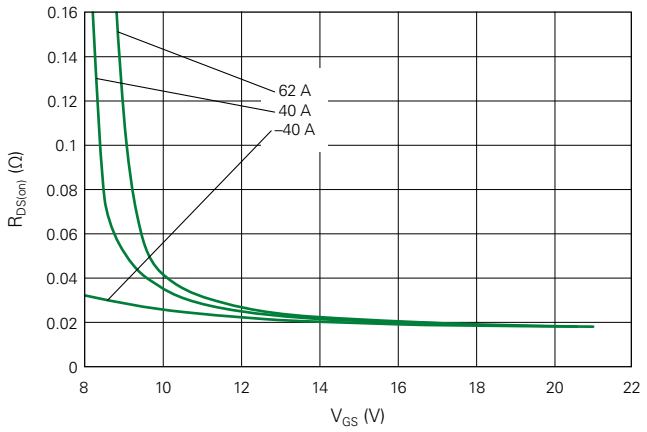

Fig. 9. Typical $V_{(BR)DSS}/V_{GS(th)}$ (Normalized) vs. Virtual Junction Temperature

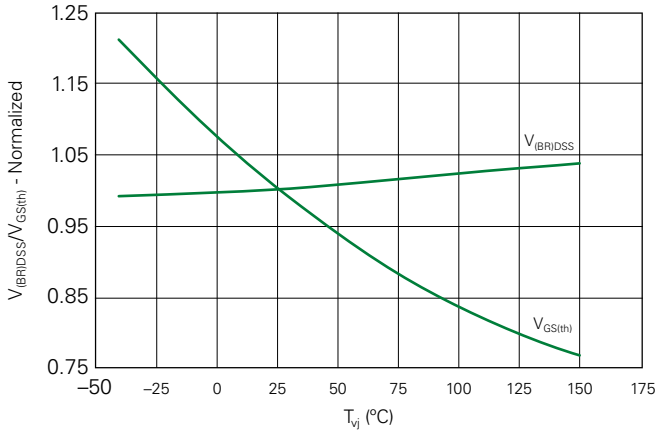

Fig. 10. Typical Reverse Conduction Characteristics @ T_{vj} = –40 °C

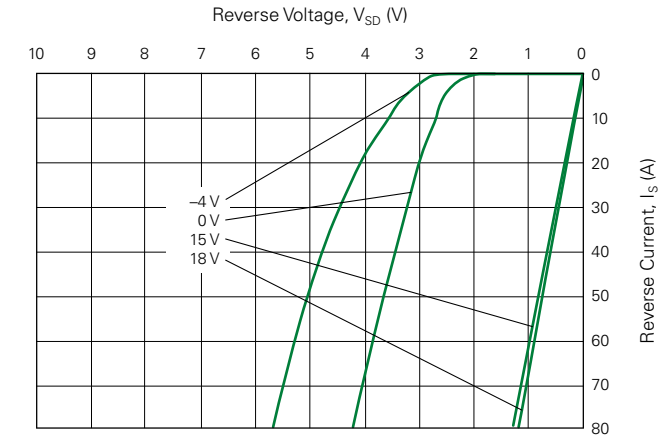

Fig. 11. Typical Reverse Conduction Characteristics @ T_{vj} = 25 °C

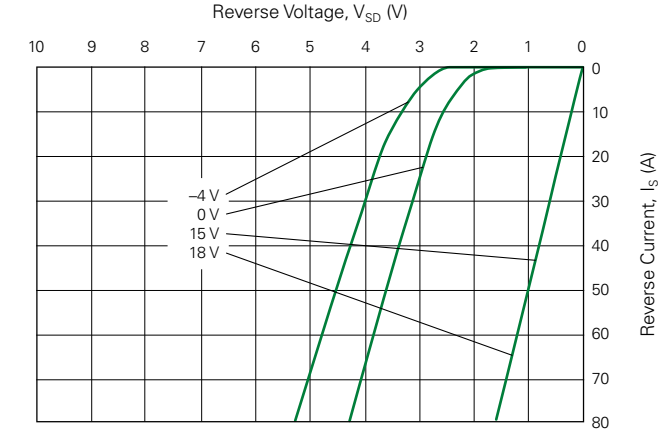

Fig. 12. Typical Reverse Conduction Characteristics @ T_{vj} = 150 °C

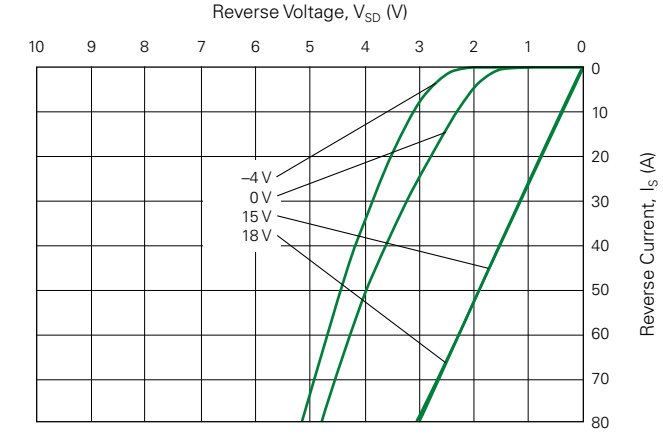

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Fig. 13. Typical On-resistance vs. Junction Temperature

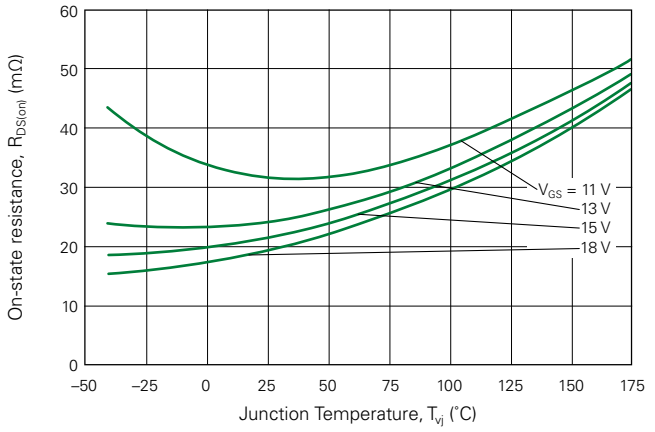

Fig. 14. Typical Threshold Voltage

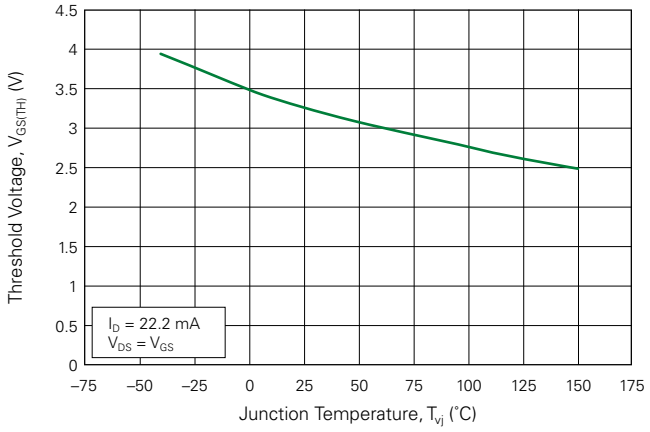

Fig. 15. Body Diode Forward Voltage vs. Gate-source Voltage

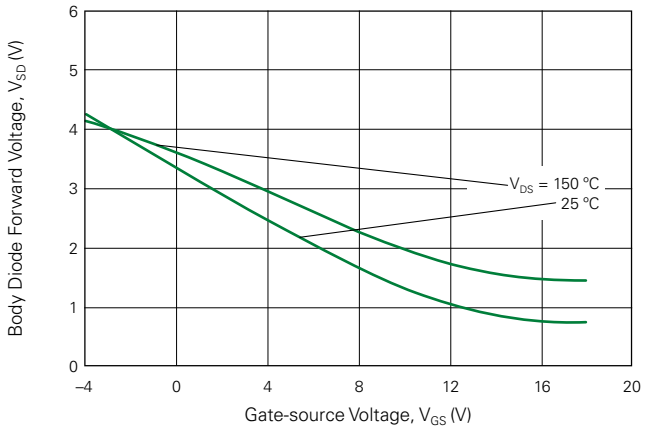

Fig. 16. Typical Turn on Gate Charge Trendline

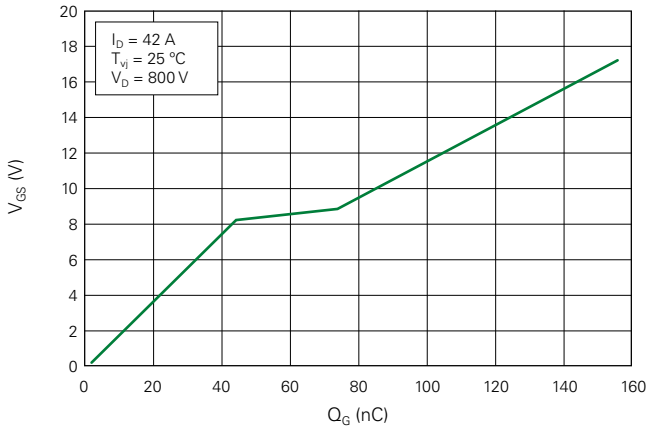

Fig. 17. Capacitance vs. V_{DS}

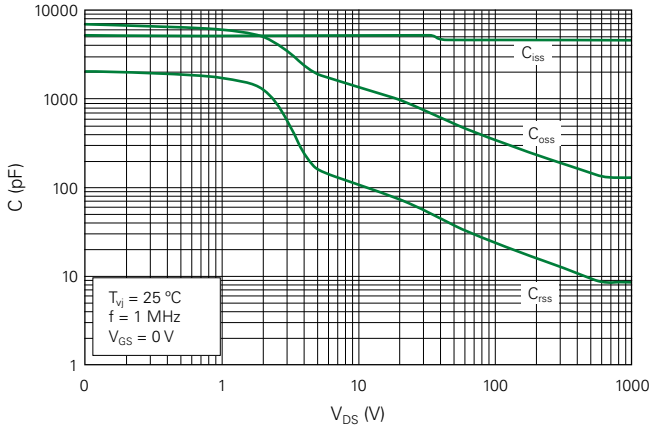

Fig. 18. Output Capacitance C_{oss} Stored Energy

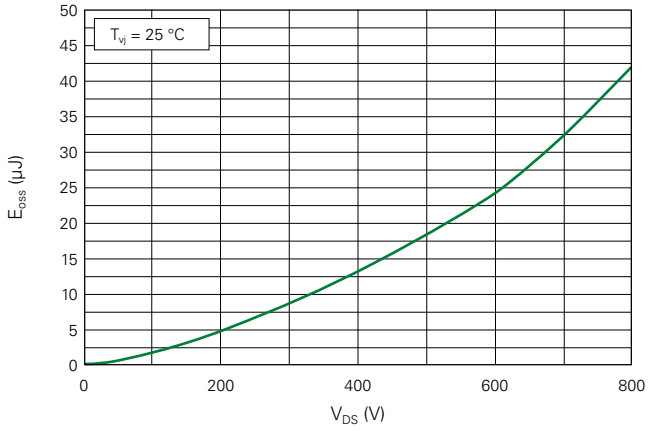

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Fig. 19. Typical Switching Time vs. External Gate Resistor

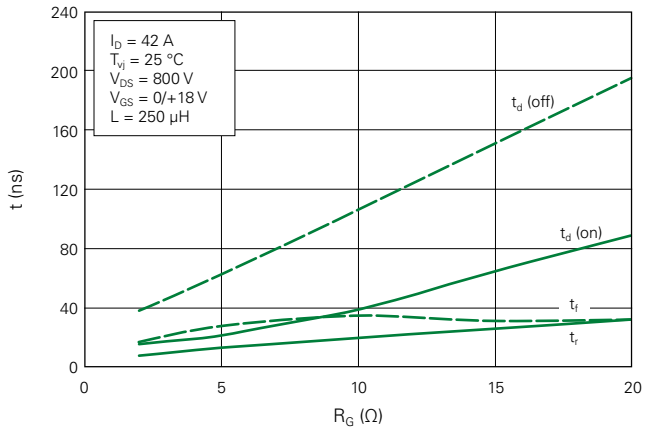

Fig. 20. Typical Switching Energy vs. Drain Current

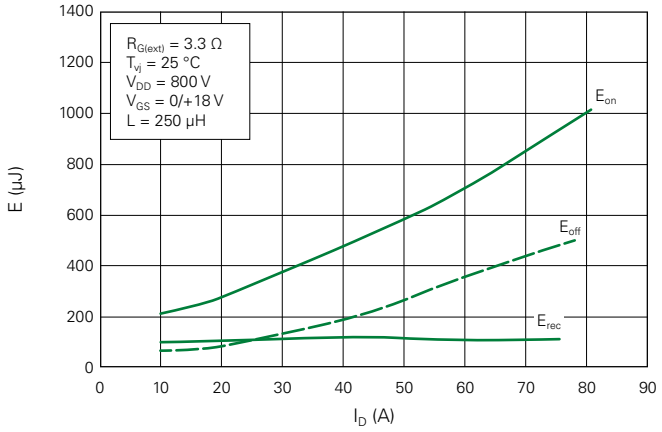

Fig. 21. Typical Switching Energy vs. External Gate Resistor

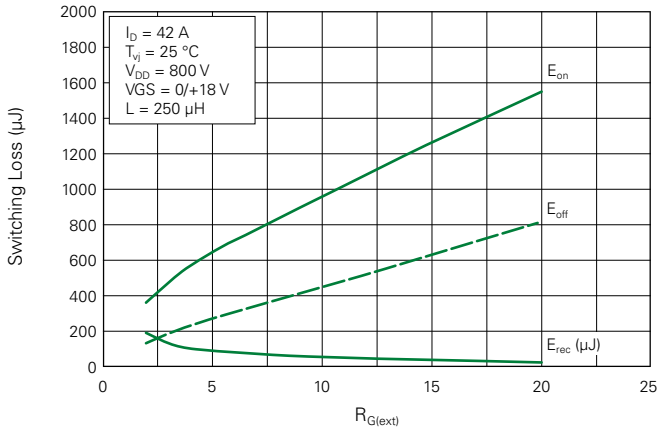

Fig. 22. Typical Switching Energy vs. Junction Temperature

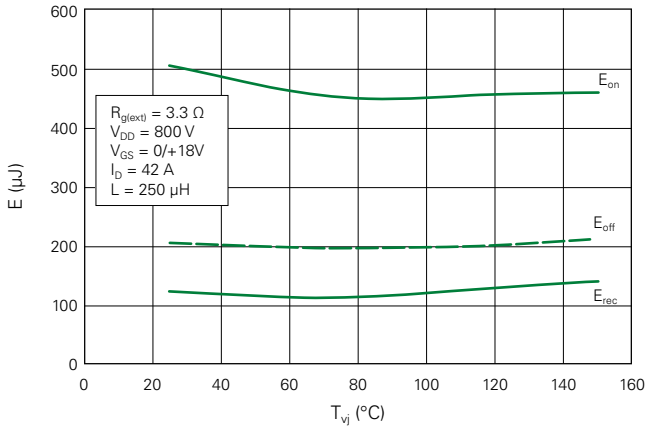

Fig. 23. Typical Reverse Recovery Charge vs. Diode Recovery Current Slope

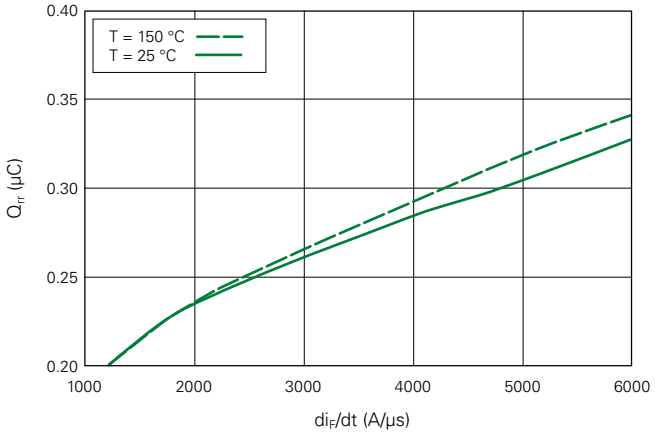

Fig. 24. Typical Reverse Recovery Current vs. Diode Recovery Current Slope

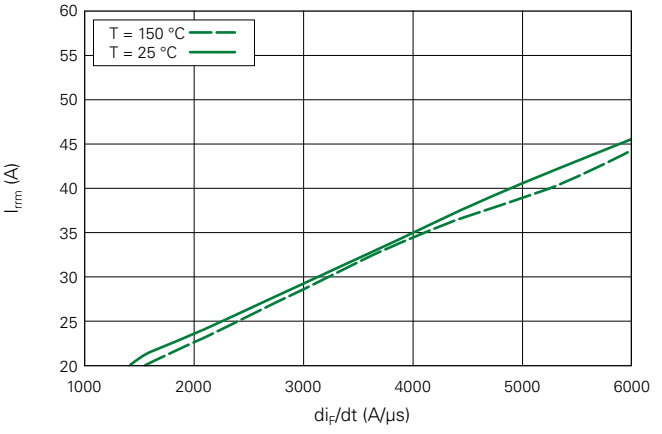

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Fig. 25. Thermal Impedance (Normalized)

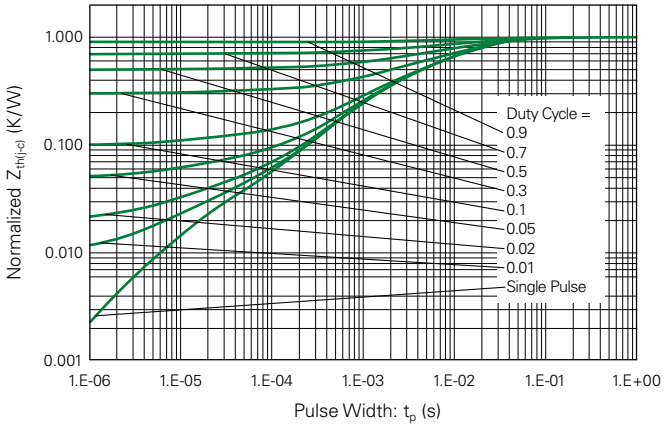

Fig. 26. Maximum Safe Operating Area (T_c = 25 °C)

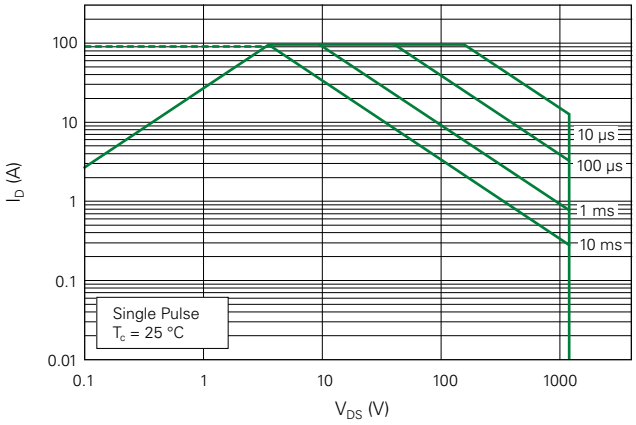

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)

Part Outline Drawing (ISO247-4L)

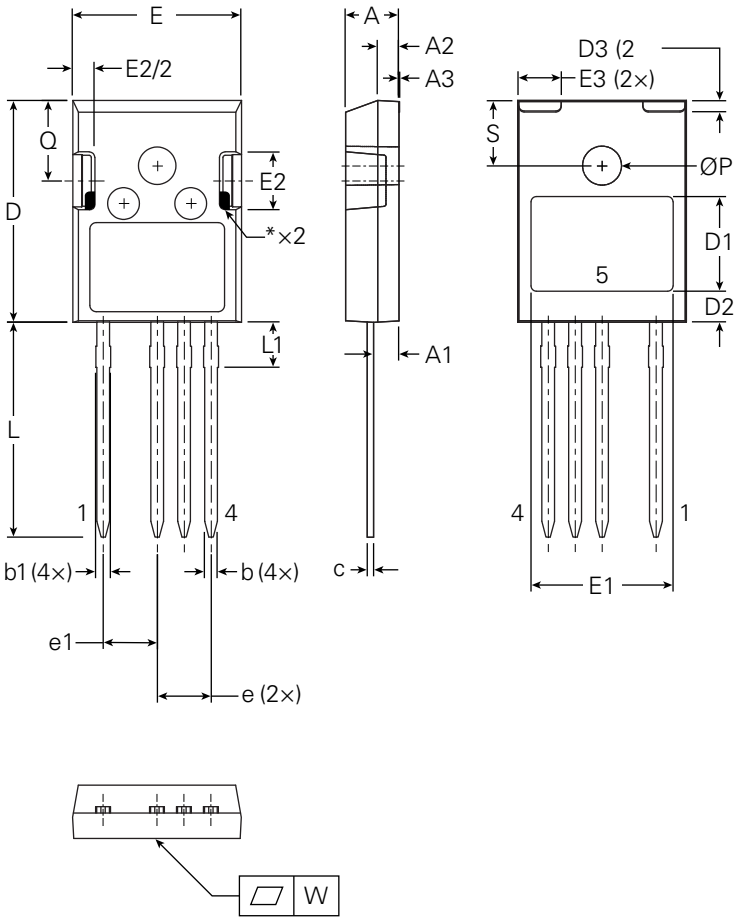

Symbol	Inches			Millimeters		
	Min.	Typical	Max.	Min.	Typical	Max
A	0.185	–	0.205	4.70	–	5.21
A1	0.087	–	0.102	2.21	–	2.59
A2	0.059	–	0.098	1.50	–	2.49
A3	0.002 TYP			0.05 TYP		
b	0.039	–	0.055	0.99	–	1.40
b1	0.043	–	0.059	1.10	–	1.50
c	0.015	–	0.035	0.38	–	0.89
D	0.819	–	0.844	20.80	–	21.45
D1	0.360 TYP			9.15 TYP		
D2	0.110 TYP			2.80 TYP		
D3	0.039 TYP			1.00 TYP		
E	0.610	–	0.639	15.49	–	16.24
E1	0.528 TYP			13.40 TYP		
E2	0.170	–	0.216	4.32	–	5.48
E3	0.157 TYP			4.00 TYP		
e	0.100 BSC			2.54 BSC		
e1	0.200 BSC			5.08 BSC		
L	0.780	–	0.799	19.81	–	20.30
L1	–	–	0.177	–	–	4.49
Q	0.290	–	0.306	7.36	–	7.76
ØP	0.140	–	0.144	3.56	–	3.65
S	0.242 BSC			6.15 BSC		
W	0.004 TYP			0.10 TYP		

Note:

1. Bottom Heatsink #5 is Pre-Ni Plated and electrically isolated from Pin #1, #2, #3, and #4.
2. Dimensions are exclusive of burrs, mold flash and tie bar extrusions.
3. Drawing conforms to ASME 14.5–2009.

* Exposed metal, electrically isolated.

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.
Read complete Disclaimer Notice at http://www.littelfuse.com/disclaimer-electronics.

Part of:

© 2025 Littelfuse, Inc.
Specifications are subject to change without notice.
Revised: XZ 10/13/2025 (1.6)