


| REVISION | | |
|----------|---------|-------------------------|
| REV | DATE | DESCRIPTION |
| A | 7/19/23 | 526717GCP - RELEASE MRY |

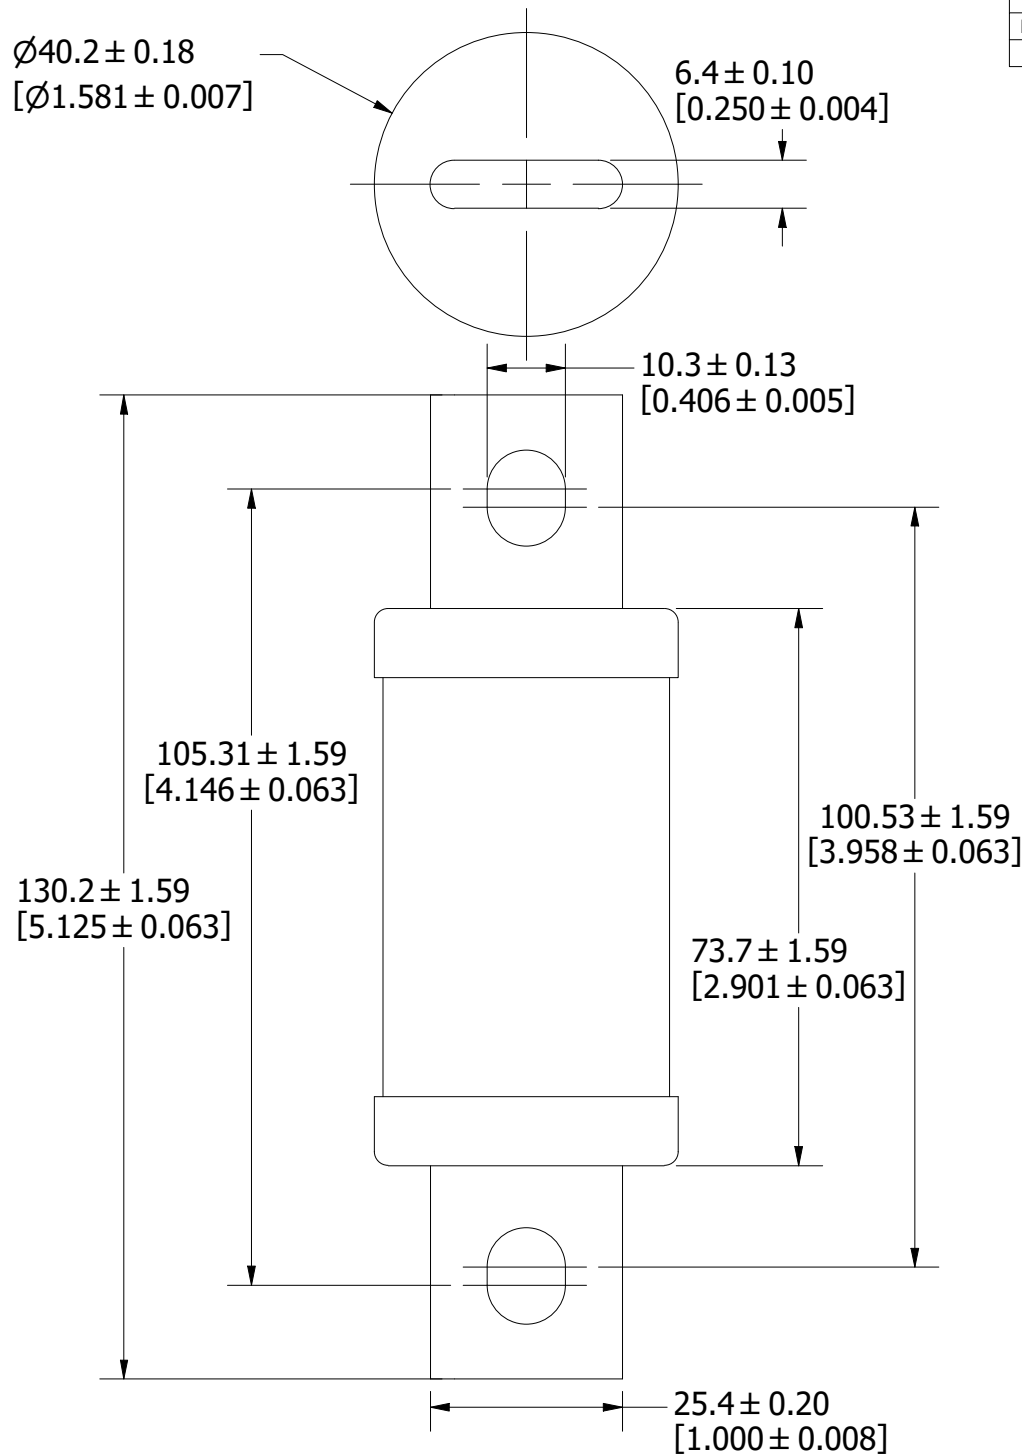

| 1 | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|-------------------------|--|-------------|-------|-----|
| BILL OF MATERIAL | | | | |
| <S> | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE | | | |
| ● | DENOTES CRITICAL CHARACTERISTICS. | | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | | |
| ST | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | | |


A

| | | | |
|---------------|-------------------|--------------|-------------------------------|
| MATL SPEC | | FINISH | |
| DRW JMoler | DATE 6/23/2023 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

| | |
|-------------------------|--|
| 3RD ANGLE PROJECTION | |
|-------------------------|--|

| | |
|--------------|-----------------------|
| TITLE | L60S 225-400A OUTLINE |
|--------------|-----------------------|

| | | | |
|--|----------|------------|--------------|
|  Littelfuse [®] CHICAGO, ILLINOIS 60631 | REVISION | DRWG NO. | SHEET 1 OF 1 |
| | A | OL-L60S400 | |