




XPT™ 650V IGBT GenX3™ w/Diode

IXYA20N65C3D1 IXYP20N65C3D1


Extreme Light Punch Through
IGBT for 20-60kHz Switching




$$\begin{aligned} V_{CES} &= 650V \\ I_{C110} &= 20A \\ V_{CE(sat)} &\leq 2.50V \\ t_{fi(typ)} &= 28ns \end{aligned}$$

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	$T_J = 25^\circ\text{C}$ to 175°C	650	V
V_{CGR}	$T_J = 25^\circ\text{C}$ to 175°C , $R_{GE} = 1M\Omega$	650	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	$T_C = 25^\circ\text{C}$	50	A
I_{C110}	$T_C = 110^\circ\text{C}$	20	A
I_{F110}	$T_C = 110^\circ\text{C}$	18	A
I_{CM}	$T_C = 25^\circ\text{C}$, 1ms	105	A
I_A	$T_C = 25^\circ\text{C}$	10	A
E_{AS}	$T_C = 25^\circ\text{C}$	200	mJ
SSOA (RBSOA)	$V_{GE} = 15V$, $T_{VJ} = 150^\circ\text{C}$, $R_G = 20\Omega$ Clamped Inductive Load	$I_{CM} = 40$ $V_{CE} \leq V_{CES}$	A
t_{sc} (SCSOA)	$V_{GE} = 15V$, $V_{CE} = 360V$, $T_J = 150^\circ\text{C}$ $R_G = 82\Omega$, Non Repetitive	10	μs
P_C	$T_C = 25^\circ\text{C}$	200	W
T_J		-55 ... +175	$^\circ\text{C}$
T_{JM}		175	$^\circ\text{C}$
T_{stg}		-55 ... +175	$^\circ\text{C}$
T_L	Maximum Lead Temperature for Soldering	300	$^\circ\text{C}$
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	$^\circ\text{C}$
M_d F_c	Mounting Torque (TO-220) Mounting Force (TO-263)	1.13/10 10..65 / 2.2..14.6	Nm/lb.in N/lb
Weight	TO-263 TO-220	2.5 3.0	g g

TO-263 AA (IXYA)



TO-220AB (IXYP)



G = Gate C = Collector
E = Emitter Tab = Collector

Features

- Optimized for 20-60kHz Switching
- Square RBSOA
- Avalanche Rated
- Anti-Parallel Fast Diode
- Short Circuit Capability
- International Standard Packages

Advantages

- High Power Density
- Extremely Rugged
- Low Gate Drive Requirement

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts
- High Frequency Power Inverters

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
BV_{CES}	$I_C = 250\mu\text{A}$, $V_{GE} = 0V$	650		V
$V_{GE(th)}$	$I_C = 250\mu\text{A}$, $V_{CE} = V_{GE}$	3.5		6.0 V
I_{CES}	$V_{CE} = V_{CES}$, $V_{GE} = 0V$ $T_J = 150^\circ\text{C}$			10 μA 400 μA
I_{GES}	$V_{CE} = 0V$, $V_{GE} = \pm 20V$			± 100 nA
$V_{CE(sat)}$	$I_C = 20A$, $V_{GE} = 15V$, Note 1 $T_J = 150^\circ\text{C}$		2.27 2.44	2.50 V V

Symbol Test Conditions

(T_J = 25°C Unless Otherwise Specified)

Characteristic Values

		Min.	Typ.	Max.
g_{fs}	I _C = 20A, V _{CE} = 10V, Note 1	7	12	S
C_{ies}	V _{CE} = 25V, V _{GE} = 0V, f = 1MHz		822	pF
C_{oes}			67	pF
C_{res}			19	pF
Q_{g(on)}	I _C = 20A, V _{GE} = 15V, V _{CE} = 0.5 • V _{CES}		30	nC
Q_{ge}			6	nC
Q_{gc}			15	nC
t_{d(on)}	Inductive load, T_J = 25°C I _C = 20A, V _{GE} = 15V V _{CE} = 400V, R _G = 20Ω Note 2		19	ns
t_{ri}			34	ns
E_{on}			0.43	mJ
t_{d(off)}			80	ns
t_{fi}			28	ns
E_{off}			0.35	mJ
t_{d(on)}	Inductive load, T_J = 150°C I _C = 20A, V _{GE} = 15V V _{CE} = 400V, R _G = 20Ω Note 2		18	ns
t_{ri}			33	ns
E_{on}			0.70	mJ
t_{d(off)}			96	ns
t_{fi}			36	ns
E_{off}			0.40	mJ
R_{thJC}	TO-220			0.65 °C/W
R_{thCS}			0.50	°C/W

Reverse Diode (FRED)

Symbol Test Conditions

(T_J = 25°C, Unless Otherwise Specified)


Characteristic Values

		Min.	Typ.	Max.
V_F	I _F = 20A, V _{GE} = 0V, Note 1 T _J = 150°C		1.5	2.5 V
I_{RM}	I _F = 20A, V _{GE} = 0V, -di _F /dt = 300A/μs, V _R = 400V, T _J = 150°C		11	A
t_{rr}			135	ns
R_{thJC}				1.85 °C/W

Notes:


1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.
2. Switching times & energy losses may increase for higher V_{CE} (clamp), T_J or R_G.

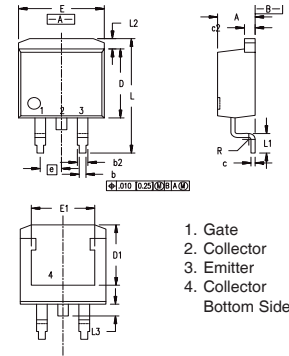TO-263 Outline



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.06	4.83	.160	.190
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.40	0.74	.016	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	8.00	8.89	.280	.320
E	9.65	10.41	.380	.405
E1	6.22	8.13	.270	.320
e	2.54	BSC	.100	BSC
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.13	0	.005

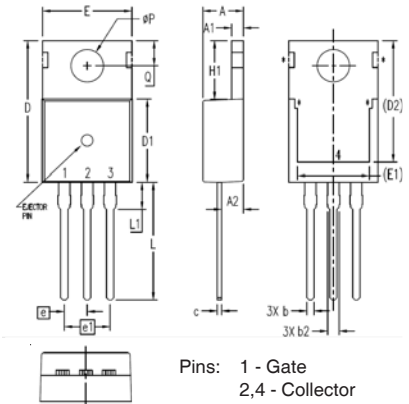TO-220 Outline



SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.169	.185	4.30	4.70
A1	.047	.055	1.20	1.40
A2	.079	.106	2.00	2.70
b	.024	.039	0.60	1.00
b2	.045	.057	1.15	1.45
c	.014	.026	0.35	0.65
D	.587	.626	14.90	15.90
D1	.335	.370	8.50	9.40
(D2)	.500	.531	12.70	13.50
E	.382	.406	9.70	10.30
(E1)	.283	.323	7.20	8.20
e	.100 BSC		2.54 BSC	
e1	.200 BSC		5.08 BSC	
H1	.244	.268	6.20	6.80
L	.492	.547	12.50	13.90
L1	.110	.154	2.80	3.90
ØP	.134	.150	3.40	3.80
Q	.106	.126	2.70	3.20

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:	4,835,592	4,931,844	5,049,961	5,237,481	6,162,665	6,404,065 B1	6,683,344	6,727,585	7,005,734 B2	7,157,338B2
	4,860,072	5,017,508	5,063,307	5,381,025	6,259,123 B1	6,534,343	6,710,405 B2	6,759,692	7,063,975 B2	
	4,881,106	5,034,796	5,187,117	5,486,715	6,306,728 B1	6,583,505	6,710,463	6,771,478 B2	7,071,537	

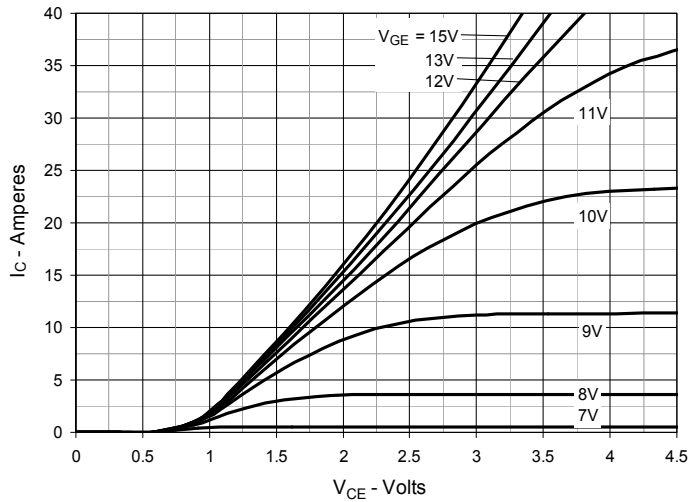
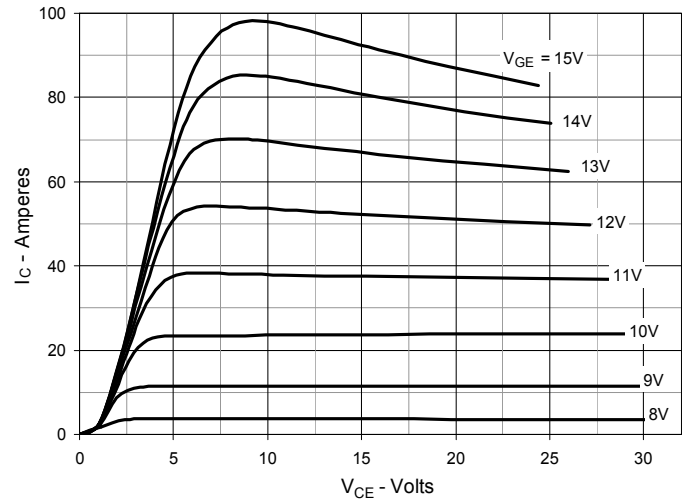
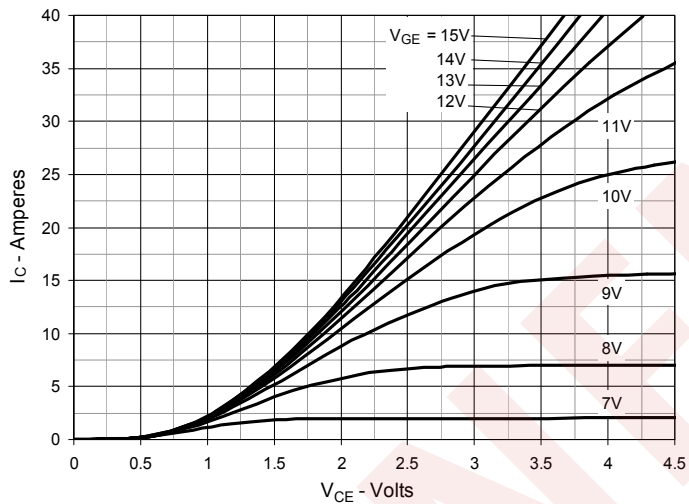
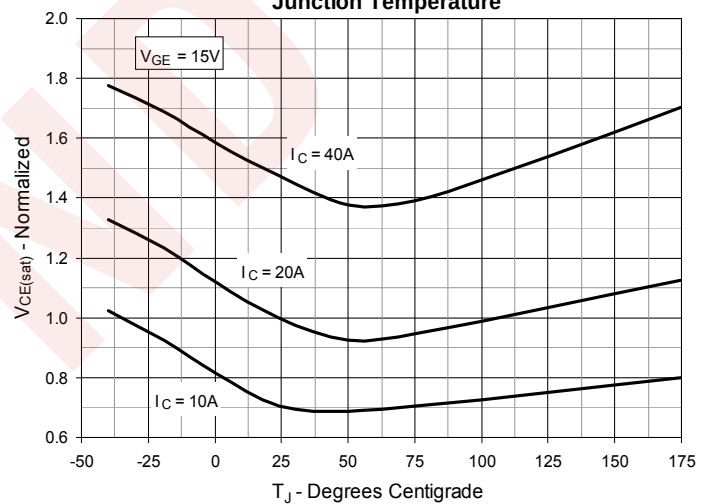
Fig. 1. Output Characteristics @ $T_J = 25^\circ\text{C}$ Fig. 2. Extended Output Characteristics @ $T_J = 25^\circ\text{C}$ Fig. 3. Output Characteristics @ $T_J = 150^\circ\text{C}$ Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

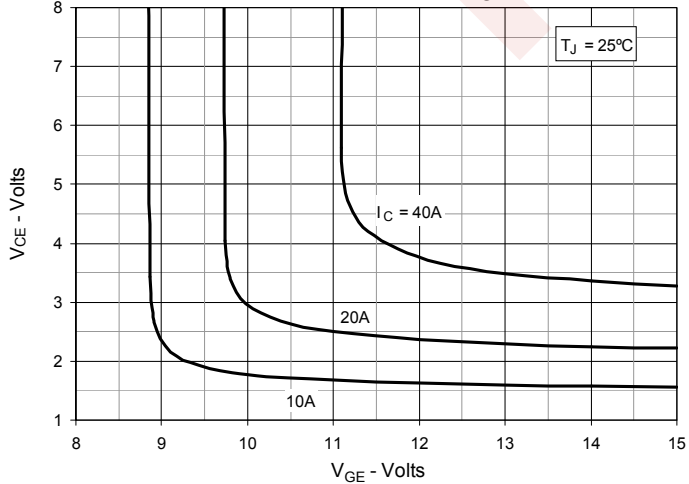


Fig. 6. Input Admittance

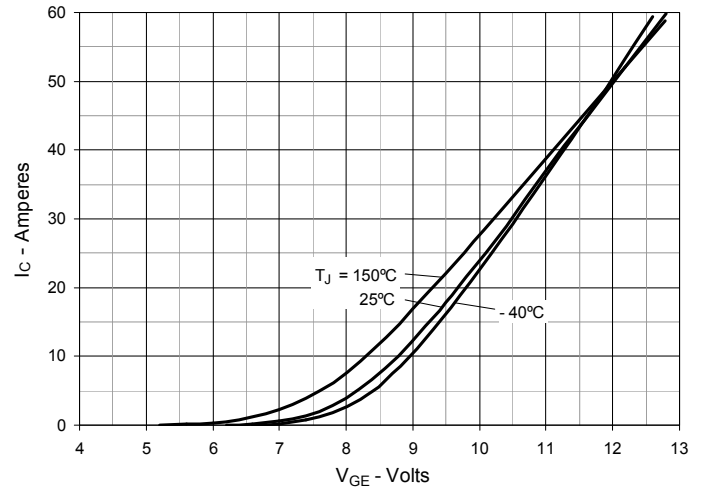


Fig. 7. Transconductance

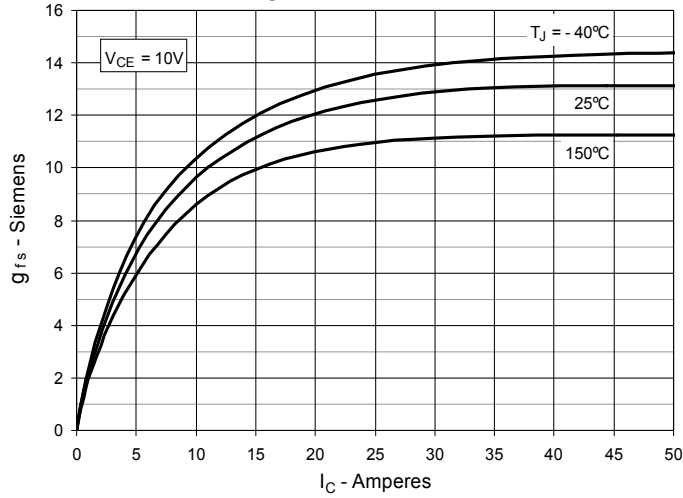


Fig. 8. Gate Charge

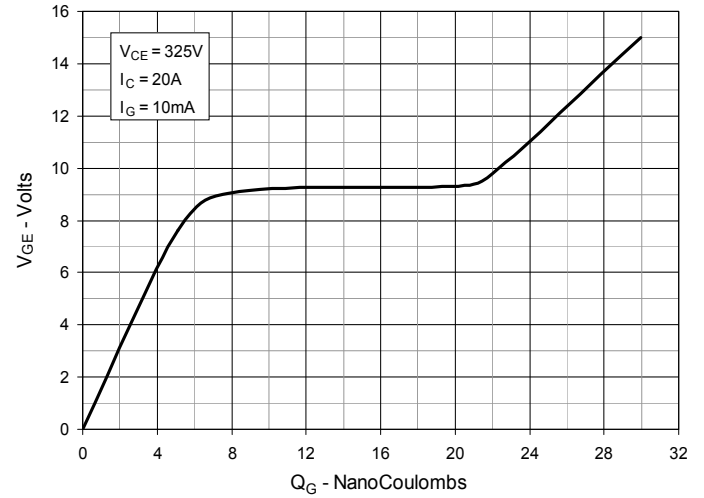


Fig. 9. Capacitance

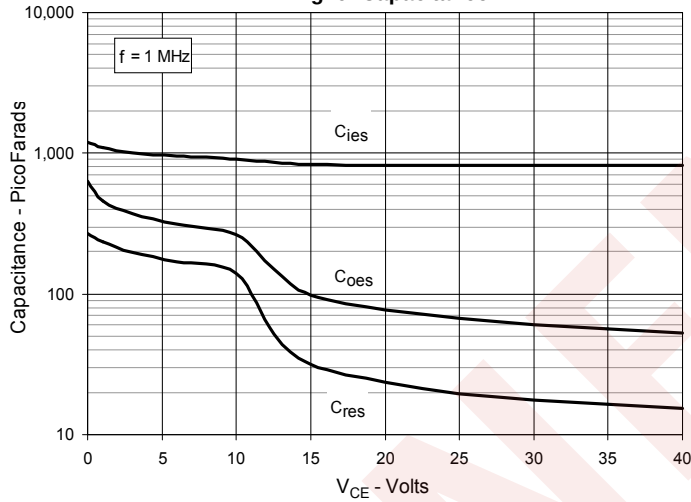


Fig. 10. Reverse-Bias Safe Operating Area

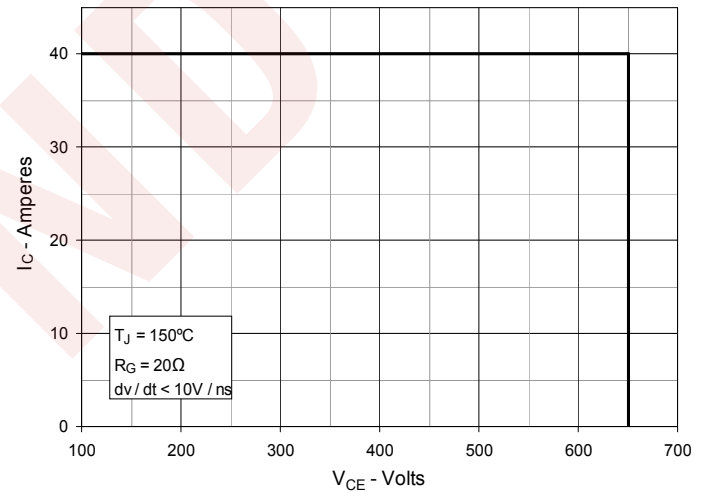


Fig. 11. Forward-Bias Safe Operating Area

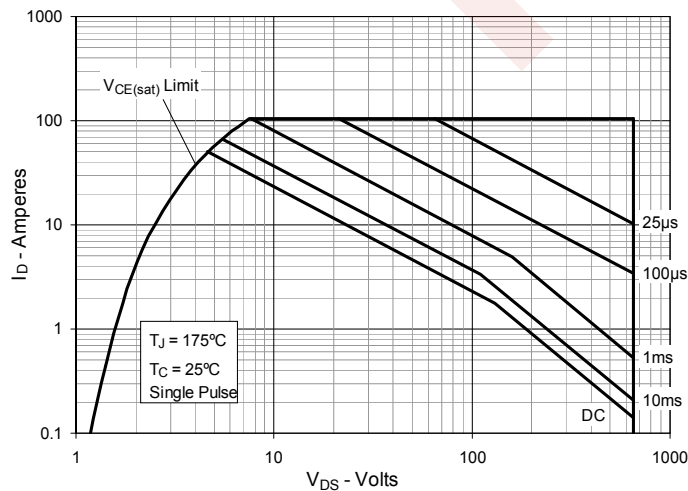


Fig. 12. Maximum Transient Thermal Impedance (IGBT)

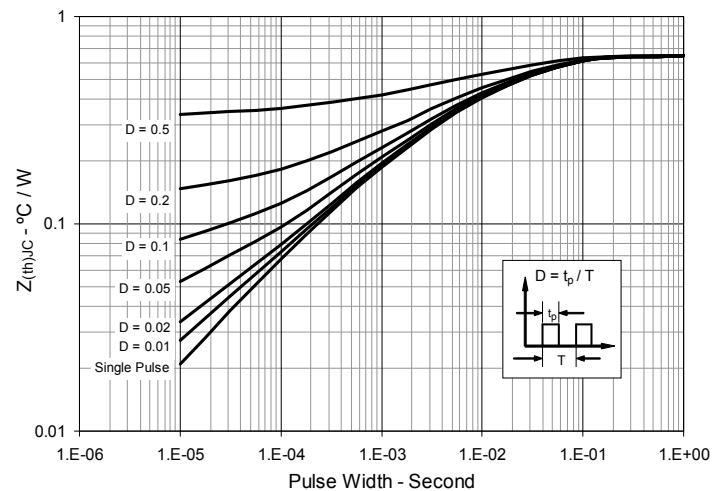


Fig. 13. Inductive Switching Energy Loss vs. Gate Resistance

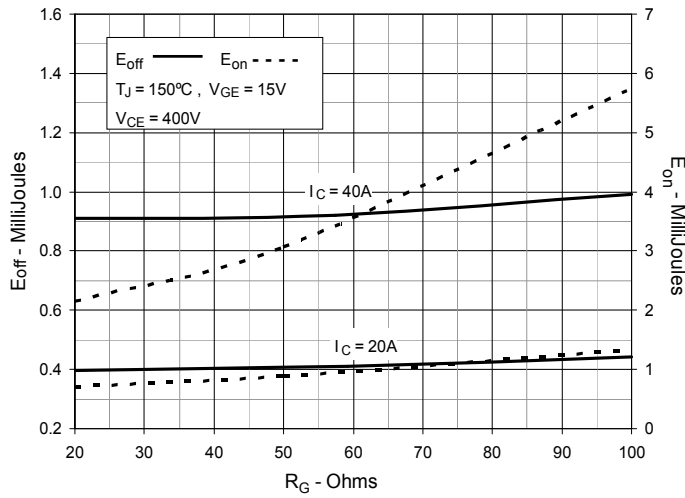


Fig. 14. Inductive Switching Energy Loss vs. Collector Current

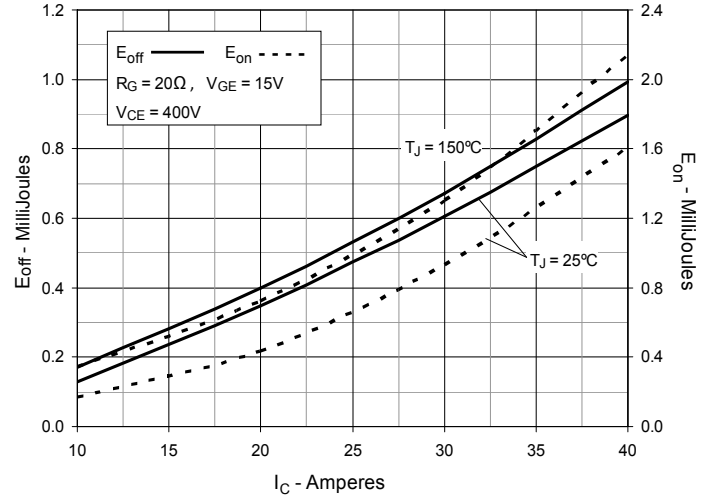


Fig. 15. Inductive Switching Energy Loss vs. Junction Temperature

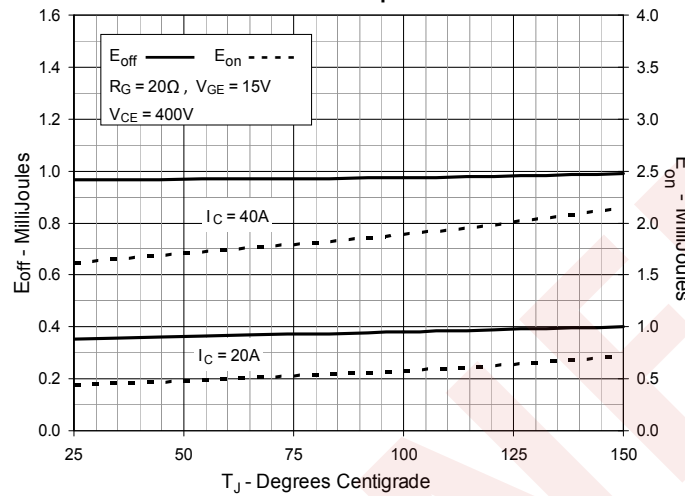


Fig. 16. Inductive Turn-off Switching Times vs. Gate Resistance

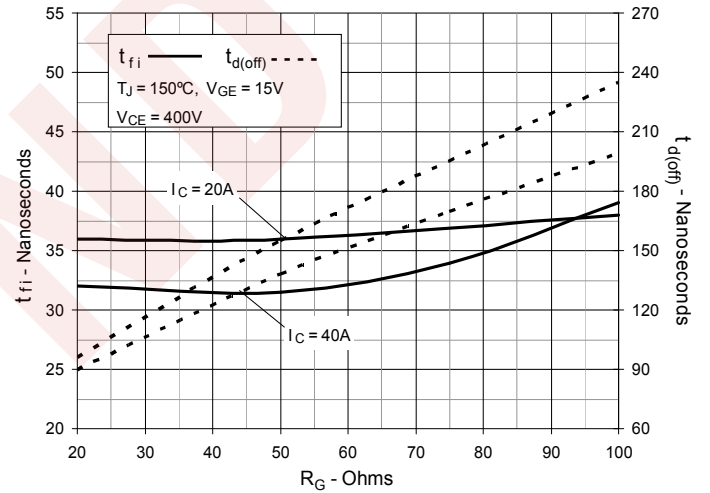


Fig. 17. Inductive Turn-off Switching Times vs. Collector Current

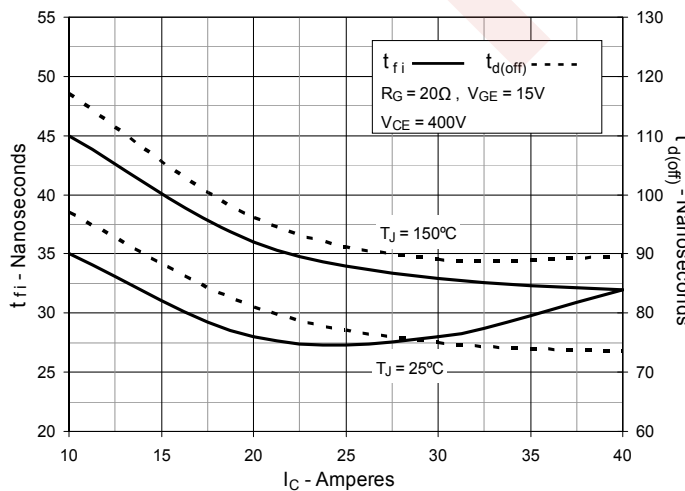


Fig. 18. Inductive Turn-off Switching Times vs. Junction Temperature

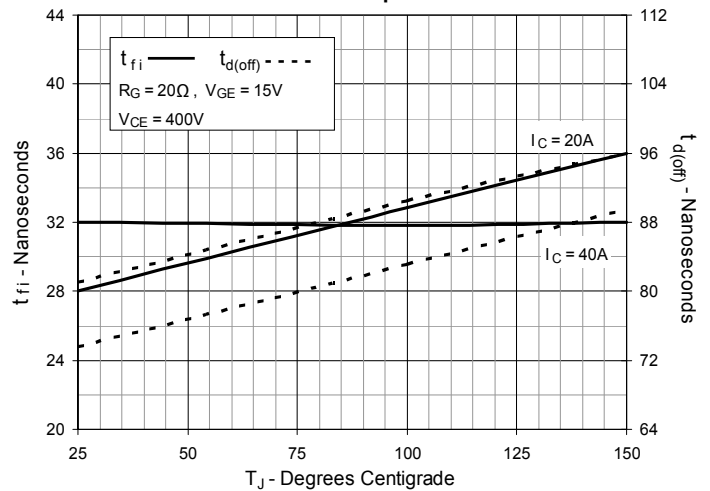


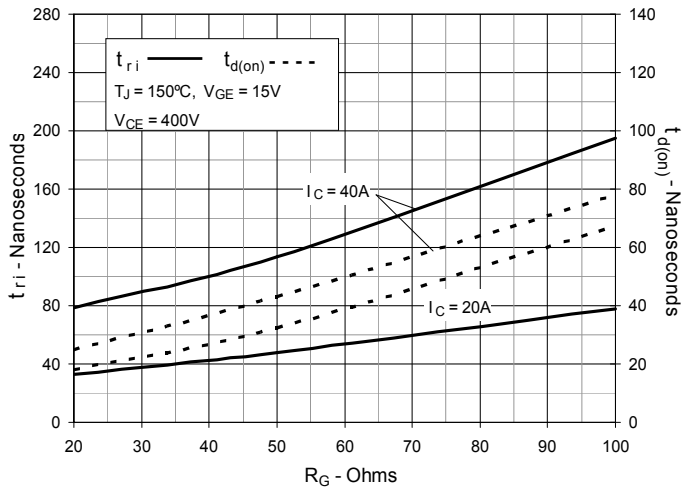
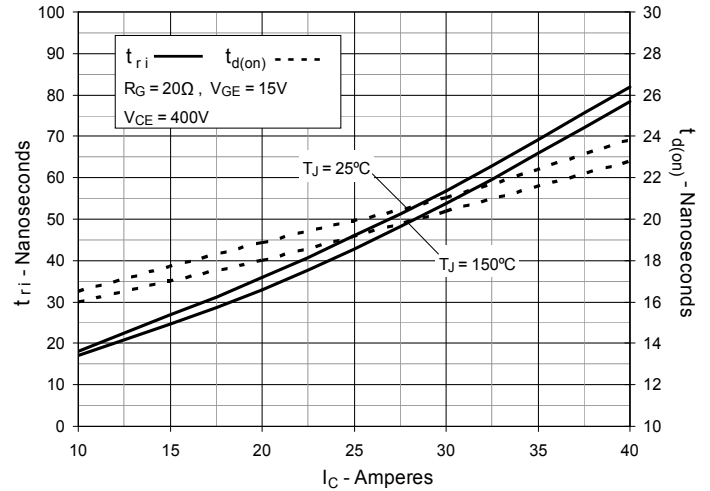
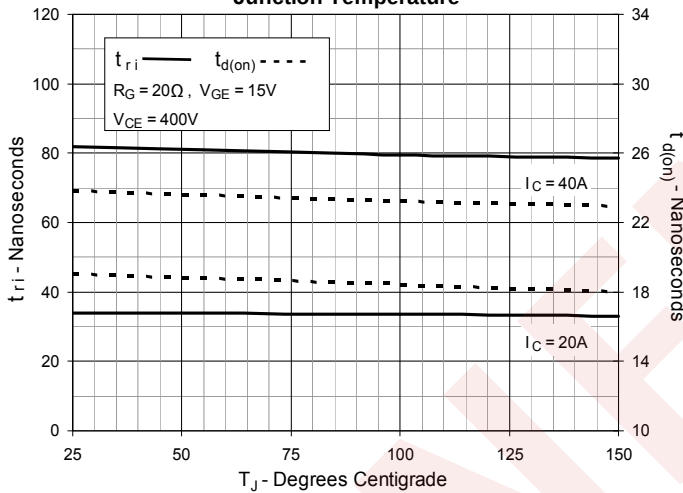
Fig. 19. Inductive Turn-on Switching Times vs.
Gate ResistanceFig. 20. Inductive Turn-on Switching Times vs.
Collector CurrentFig. 21. Inductive Turn-on Switching Times vs.
Junction Temperature

Fig. 22. Diode Forward Characteristics

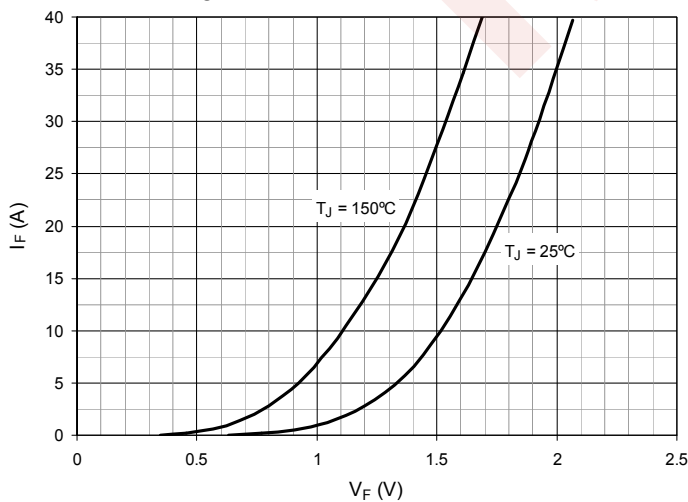
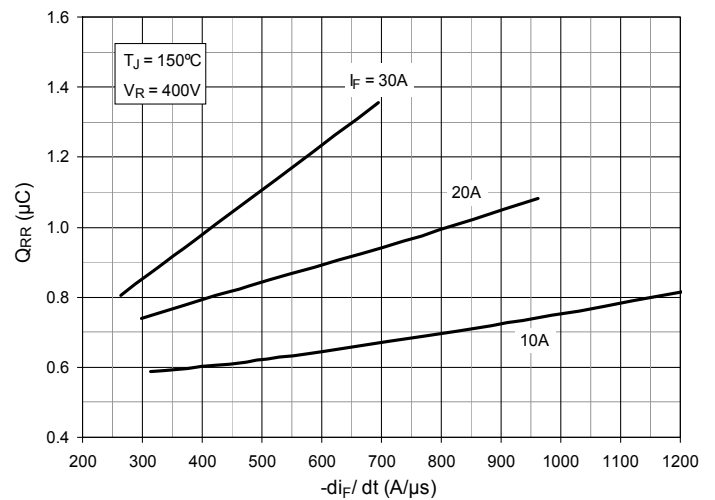
Fig. 23. Reverse Recovery Charge vs. $-di_F/dt$ 

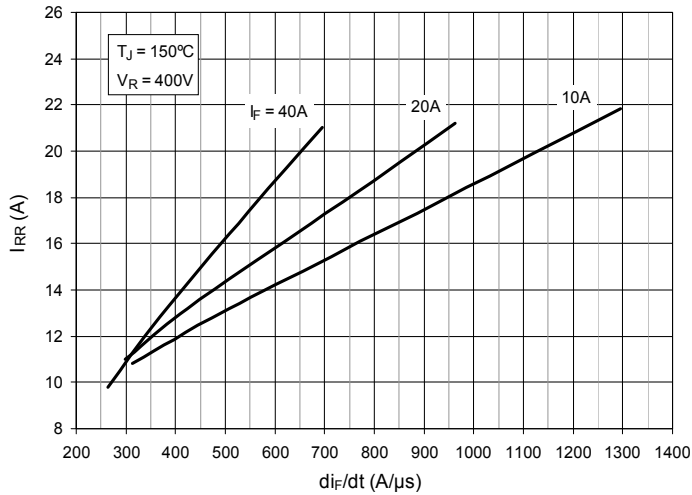
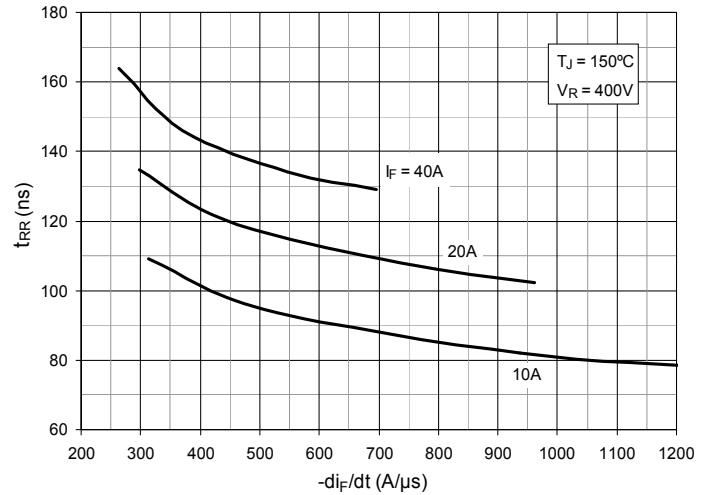
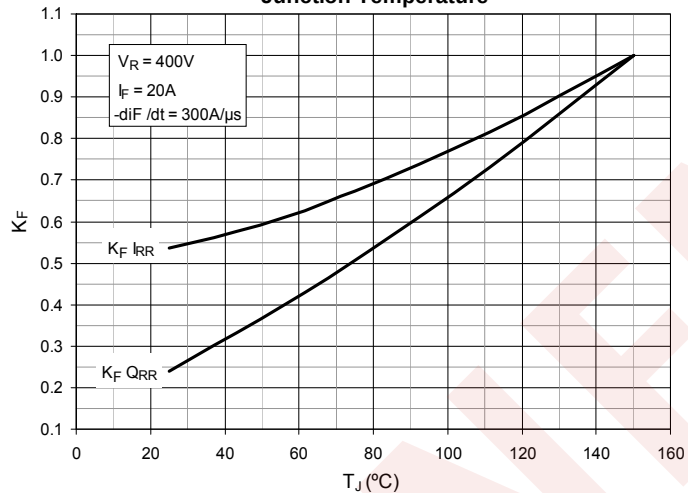
Fig. 24 Reverse Recovery Current vs. $-di_F/dt$ Fig. 25. Reverse Recovery Time vs. $-di_F/dt$ Fig. 26. Dynamic Parameters Q_{RR} , I_{RR} vs. Junction Temperature

Fig. 27. Maximum Transient Thermal Impedance (Diode)


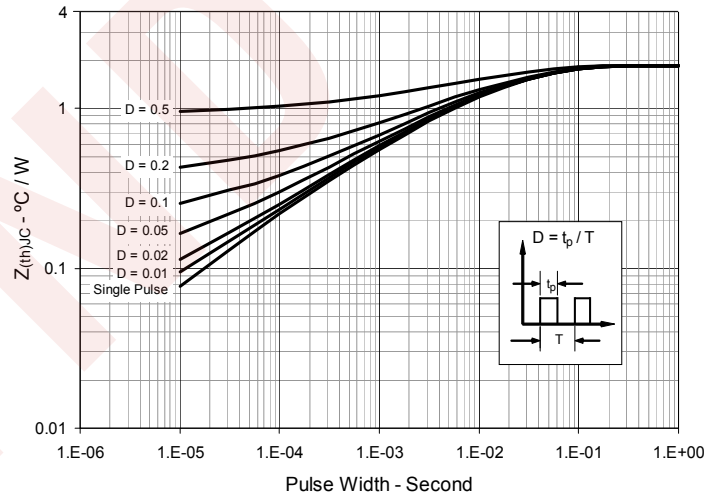


Fig. 28. Cauer Thermal Network

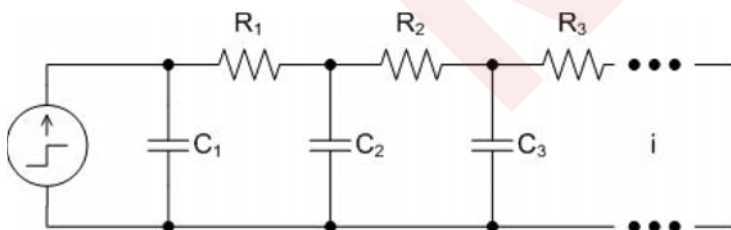

IGBT

i	R_i ($^\circ C/W$)	C_i (J/ $^\circ C$)
1	0.170320	0.0017715
2	0.136990	0.0166820
3	0.090011	0.0391660

DIODE

i	R_i ($^\circ C/W$)	C_i (J/ $^\circ C$)
1	0.331730	0.0002858
2	0.768860	0.0037423
3	0.285550	0.0432130

NOT FOR NEW DESIGN

NEW



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.