THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

PART NUMBER	"A"	"B"	"C"	"D"	LEAD "A" COLOR	LEAD "B" COLOR
0FHM0001ZXJ-RED	94±5 [3.70±0.2]	94±5 [3.70±0.2]	13±2 [.51±.08]	13±2 [.51±.08]	RED	RED

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	000738ER - RELEASE GMB	7/27/2009	
	B	001272EC - 4.40 WAS 3.9 GMB	9/25/2009	
	C	520522ECC - UPDATE NOTES FYUE	7/11/2019	
	D	ECN522038 - UPDATED VOLTAGE RATING TO 58V, REMOVED NOTE 6, NEW TITLE BLOCK FORMAT S.CASTILLO/D.SILVA	3/11/2022	L.ARGIL

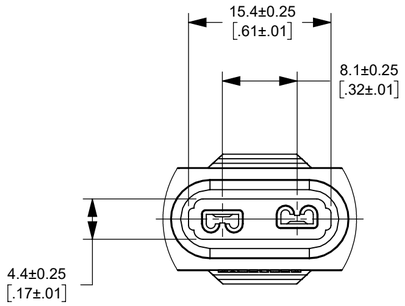

DETAIL A
SCALE 2 : 1



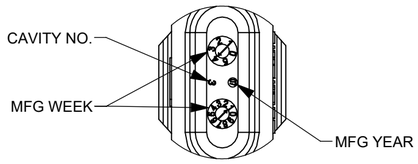

DETAIL B
SCALE 2 : 1



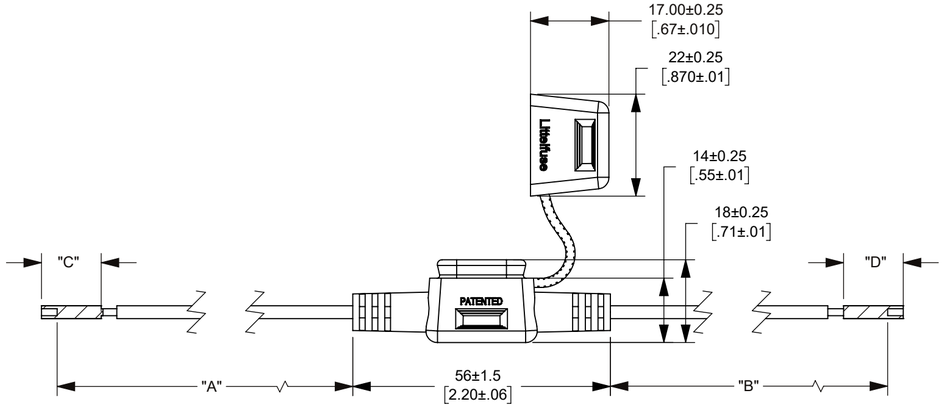

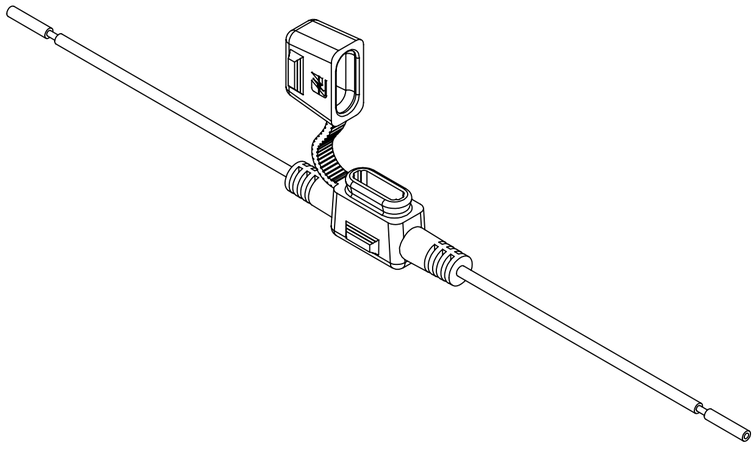

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. NOTES:

1.1. HOLDER MATERIAL: BLACK TPV
1.2. CONTACTS: C194 COPPER ALLOY: TIN-PLATED
1.3. WIRE: RED, 14 AWG STRANDED COPPER, 125C RATED, GXL WIRE
1.4. CRIMP: MUST MEET SAE/USCAR 21 STANDARD
1.5. RATING: MAX. 20A, 58Vdc
1.6. FUSEHOLDERS SHOULD NOT BE PLACED UNDER TENSION IN FINAL APPLICATION.

TOLERANCE UNLESS OTHERWISE SPECIFIED
ONE PLACE DEC ±0.3 | THREE PLACE DEC ±0.1000
TWO PLACE DEC ±0.15 | ANGULAR ±1°

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.

PER CHI-NPD20-0008 PROCEDURE

●	FIT/ FUNCTION CRITICAL CHARACTERISTICS
<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS. -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

	NAME	DATE
DRAWN	GMB	7/27/2009
CHECKED	-	-
	-	-
	-	-

FORM NO: CVP-PE40-0005 REV B
THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING

Littelfuse
Expertise Applied | Answers Delivered

TITLE: MINI IN-LINE FUSEHOLDER

SIZE C | DWG. NO. OUTLINE OL-0FHM0001ZXJ-RED | REV. D
SCALE 1:1 | SHEET 1 OF 1

mm
[in]