


# AK10-Y Series

## Axial Leaded – 10kA

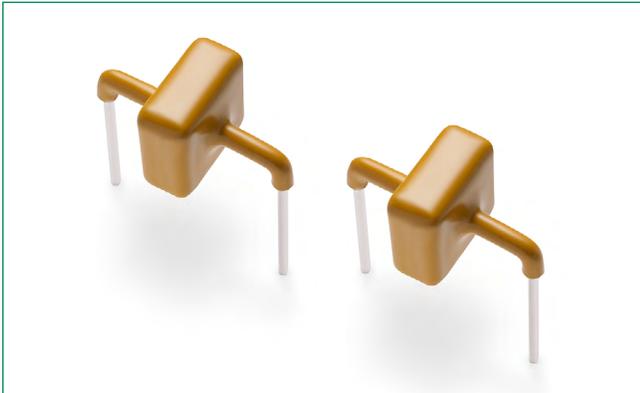

### Agency Approvals

Agency	Agency File/Certificate Number
	E128662

### Maximum Ratings and Thermal Characteristics

(T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating Storage Temperature Range	T <sub>STG</sub>	-55 to 150	°C
Operating Junction Temperature Range	T <sub>J</sub>	-55 to 125	°C
Current Rating <sup>1</sup>	I <sub>PP</sub>	10	kA

**Note:**

1. Rated I<sub>PP</sub> measured with 8/20μs pulse.

### Functional Diagram



### Description

The AK10-Y series of high power TVS diode is specially designed for meeting severe surge test environment of both AC and DC line protection applications. It features a very fast response and ultra low clamping characteristics as compared to MOVs (Metal Oxide Varistors). It accomplishes this by virtue of the Littelfuse Foldback technology, which provides a clamping voltage lower than the avalanche voltage (but above the rated working voltage); therefore, any voltage rise due to increased current conduction is maintained at a minimum magnitude, providing the best possible protection level. These AK components can be connected in series and / or parallel to create a very high surge current protection solution.

### Features

- Both reflow and wave soldering capable
- Typical failure mode is short from over-specified voltage occurrent
- Ultra compact: less than onetenth the size of traditional discrete solutions
- Sharp breakdown voltage
- Low dynamic resistance
- Symmetric in leads width for easier soldering during assembly
- IEC 61000-4-2 ESD 15 kV(Air), 8 kV (Contact)
- V<sub>BR</sub> @ T<sub>J</sub> = V<sub>BR</sub> @ 25°C × (1 + αT × (T<sub>J</sub> - 25)) (αT: Temperature Coefficient)
- UL Recognized compound meeting flammability rating V-0
- EFT protection of data lines in accordance with IEC 61000-4-4
- Halogen-free and RoHS compliant
- Glass passivated junction
- Recognized to UL 497B as an Isolated Loop Circuit Protector
- Pb-free E4 means 2nd level interconnect is Pb-free and the terminal finish material is silver

### Electrical Characteristics

(T<sub>A</sub>=25°C unless otherwise noted)

Part Numbers	Part Marking	Standoff Voltage (V <sub>R</sub> ) Volts	Max. Reverse Leakage (I <sub>r</sub> ) @ V <sub>R</sub> μA	Typical I <sub>r</sub> @ 85°C (μA)	Reverse Breakdown Voltage (V <sub>BR</sub> ) @ I <sub>T</sub>		Test Current I <sub>T</sub> (mA)	Max. Clamping Voltage V <sub>CL</sub> @ Peak Pulse Current (I <sub>PP</sub> ) (Note 1)		Max. Temp Coefficient of V <sub>BR</sub> (%/°C)	Max. Capacitance 0 Bias 10kHz (nF)	Agency Approval
					Min Volts	Max Volts		V <sub>C</sub> Volts	I <sub>PP</sub> Amps			
AK10-015C-Y	10-015C	15	10	15	16	19	10	28	10,000	0.1	40.0	-
AK10-030C-Y	10-030C	30	10	15	32	37	10	48	10,000	0.1	20.0	X
AK10-033C-Y	10-033C	33	10	15	36	40	10	53	10,000	0.1	20.0	X
AK10-058C-Y	10-058C	58	10	15	64	70	10	110	10,000	0.1	10.0	X
AK10-066C-Y	10-066C	66	10	15	72	80	10	120	10,000	0.1	10.0	X
AK10-076C-Y	10-076C	76	10	15	85	95	10	140	10,000	0.1	6.5	X
AK10-100C-Y	10-100C	100	10	15	110	122	10	150	10,000	0.1	5.5	-
AK10-170C-Y	10-170C	170	10	15	180	220	10	260	10,000	0.1	4.0	X
AK10-190C-Y	10-190C	190	10	15	200	245	10	290	10,000	0.1	3.0	X
AK10-220C-Y	10-220C	220	10	15	230	270	10	330	10,000	0.1	2.5	X
AK10-240C-Y	10-240C	240	10	15	250	285	10	340	10,000	0.1	2.2	X
AK10-270C-Y	10-270C	270	10	15	282	315	10	401	10,000	0.1	2.3	X
AK10-380C-Y	10-380C	380	10	15	401	443	10	520	10,000	0.1	2.0	X
AK10-430C-Y	10-430C	430	10	15	440	490	10	625	10,000	0.1	1.4	X
AK10-530C-Y	10-530C	530	10	15	560	619	10	750	10,000	0.1	1.0	X


Note: Using 8/20μs wave shape as defined in IEC 61000-4-5.

# AK10-Y Series


## Axial Leaded – 10kA

### Ratings and Characteristic Curves (TA=25°C unless otherwise noted) (Continued)


**Figure 1**  
Peak Power Derating

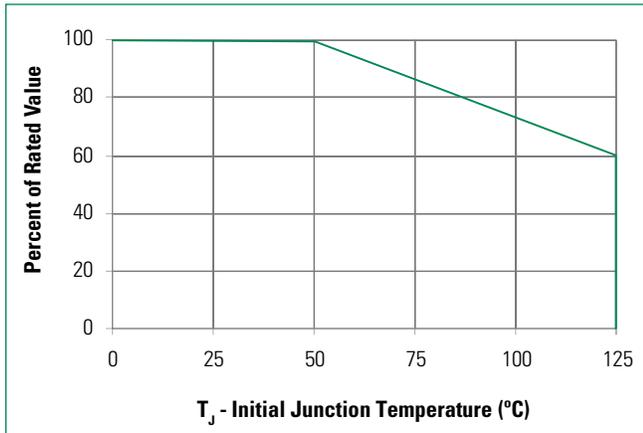


**Figure 2**  
Pulse Waveform

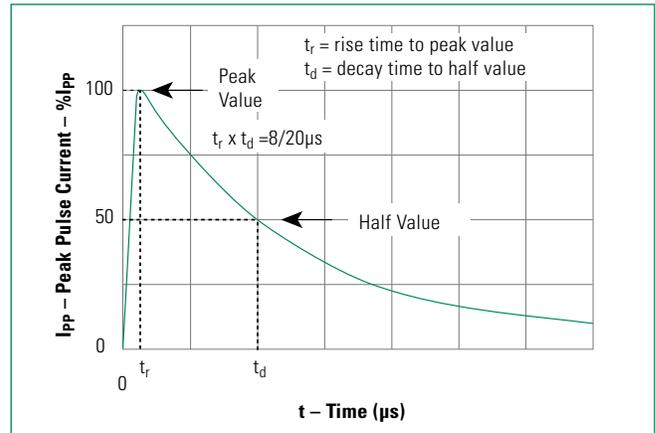


**Figure 3**  
Typical Peak Pulse Power Rating Curve

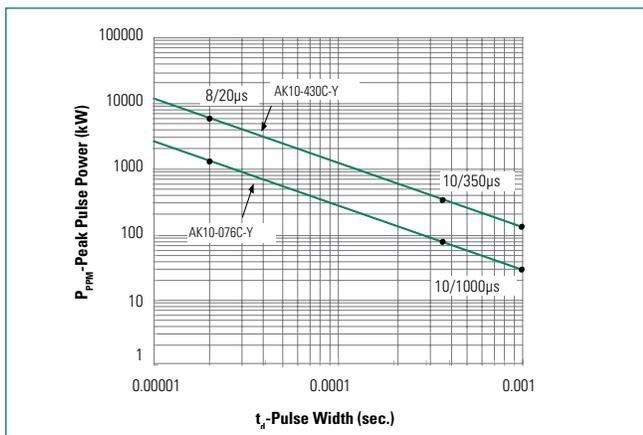

**Figure 4**  
Typical V<sub>BR</sub> Vs Junction Temperature

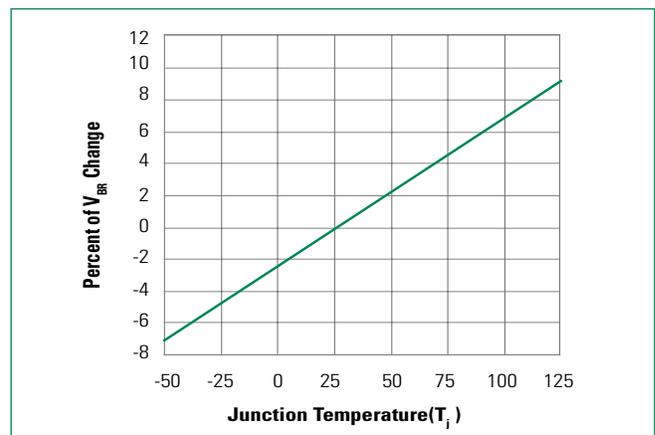

**Figure 5**  
Surge Response (8/20 Surge current waveform)

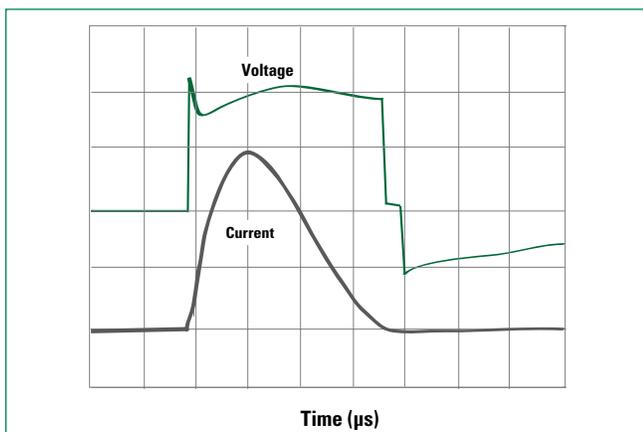


# AK10-Y Series

## Axial Leaded – 10kA


### Soldering Parameters

<b>Reflow Condition</b>	Lead-free assembly	
<b>Pre Heat</b>	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_p$ )	60 – 120 secs
<b>Average ramp up rate (Liquidus Temp (<math>T_L</math>) to peak)</b>	3°C/second max	
<b><math>T_{s(max)}</math> to <math>T_A</math> - Ramp-up Rate</b>	3°C/second max	
<b>Reflow</b>	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Time (min to max) ( $T_s$ )	60 – 150 seconds
<b>Peak Temperature (<math>T_p</math>)</b>	260 <sup>+0/-5</sup> °C	
<b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>	30 seconds	
<b>Ramp-down Rate</b>	6°C/second max	
<b>Time 25°C to peak Temperature (<math>T_p</math>)</b>	8 minutes Max.	
<b>Do not exceed</b>	260°C	

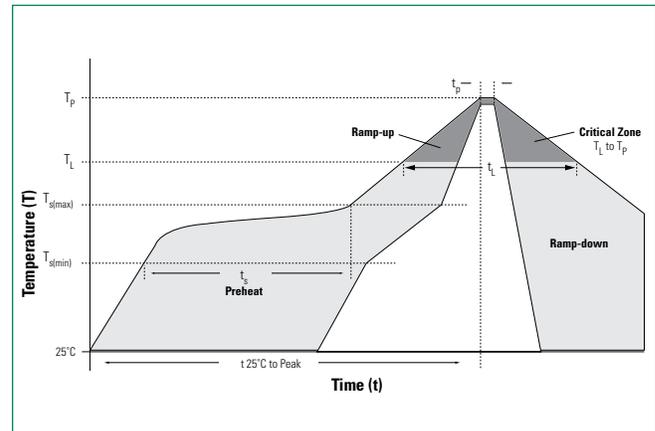

### Flow Soldering (Solder Dipping)

<b>Reflow Condition</b>	Lead-free assembly	
<b>Pre Heat</b>	- Temperature Min ( $T_{s(min)}$ )	140°C
	- Temperature Max ( $T_{s(max)}$ )	160°C
	- Time to Pre-Heat Temp	60 – 150 secs
<b>Average ramp up rate to Pre-Heat Temp</b>	5°C/second max	
<b>Peak Temperature (<math>T_p</math>)</b>	260 <sup>+0/-5</sup> °C	
<b>Average ramp up rate (pre-heat to <math>T_p</math>)</b>	5°C/second max	
<b>Time within actual peak Temperature Max</b>	6 seconds	
<b>Ramp-down Rate</b>	5°C/second max	

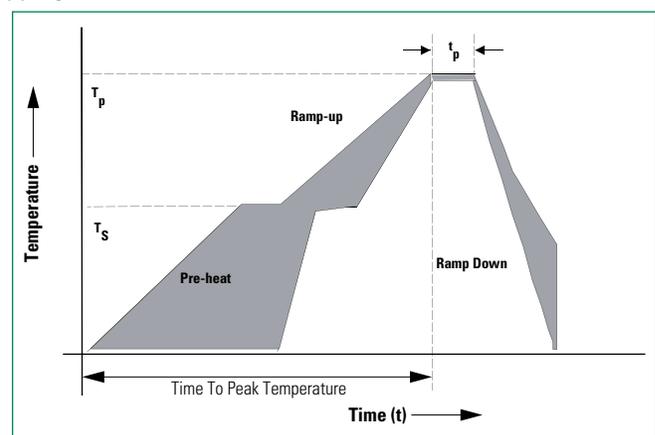

### Physical Specifications

<b>Weight</b>	Contact manufacturer
<b>Case</b>	Axial lead component over glass passivated junction
<b>Terminal</b>	Silver plated leads, solderable per MIL-STD-750 Method 2026


### Environmental Specifications

<b>High Temp Voltage Blocking (HTRB)</b>	100% DC reverse voltage rated 125°C, 1008 hours. JEDEC, JESD22-A-108
<b>Biased Temp &amp; Humidity (H3TRB)</b>	1008 hours at TA = 85°C/85% RH with part reverse biased at 80% of rated breakdown voltage. JEDEC, JESD22-A-101
<b>Temp Cycle (TC)</b>	-55°C to +125°C, 15 min. dwell, 20 cycles. JEDEC, JESD22-A104
<b>Resistance to soldering heat (RSH)</b>	+260°C, 30 secs. JEDEC, JESD22-B-106

# AK10-Y Series

## Axial Leaded – 10kA


### Dimensions

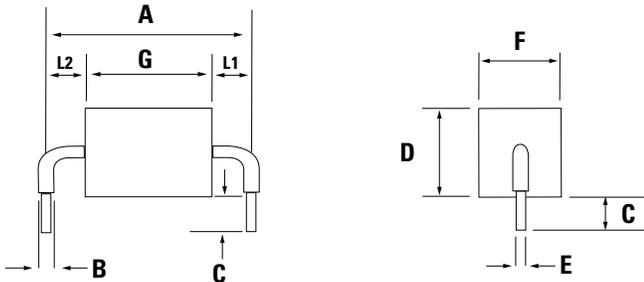

Dimensions	Inches	Millimeters
A	0.950 +/- 0.04	24.15 +/- 1.00
A - 530C-Y	1.370 +/- 0.08	34.70 +/- 2.00
B	0.095 +/- 0.024	2.4 +/- 0.60
C	0.236 +/- 0.04	6.00 +/- 1.00
D	0.570 max.	14.48 max.
E	0.050 +/- 0.002	1.270 +/- 0.05
F	0.500 max.	12.70 max.
G - 015C-Y	0.142 +/- 0.04	3.60 +/- 1.00
G - 030C-Y/ 033C-Y	0.167 +/- 0.04	4.23 +/- 1.00
G - 058C-Y/066C-Y/076C-Y	0.200 +/- 0.04	5.08 +/- 1.00
G - 100C-Y	0.236 +/- 0.04	6.0 +/- 1.00
G - 170C-Y/190C-Y	0.362 +/- 0.04	9.2 +/- 1.00
G-220C-Y	0.39 +/- 0.04	9.9 +/- 1.00
G - 240C-Y/ /270C-Y	0.420 +/- 0.04	10.67 +/- 1.00
G - 380C-Y/430C-Y	0.650 +/- 0.04	16.50 +/- 1.00
G - 530C-Y	1.060 +/- 0.06	27.00 +/- 1.50
L1/L2	L1= L2 tolerance +/- 0.04 inch (1.0 mm)	

### Part Marking System


#### Type 1 - Side View

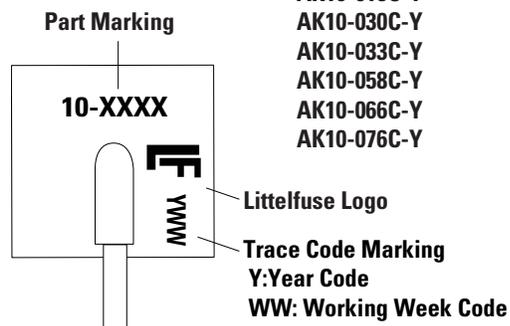

#### Apply to P/N listed below:

AK10-015C-Y  
AK10-030C-Y  
AK10-033C-Y  
AK10-058C-Y  
AK10-066C-Y  
AK10-076C-Y


#### Type 2 - Top View

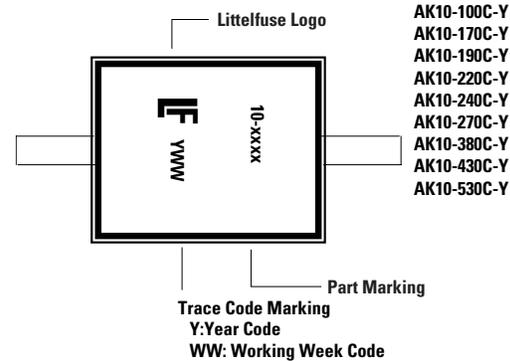

#### Apply to P/N listed below:

AK10-100C-Y  
AK10-170C-Y  
AK10-190C-Y  
AK10-220C-Y  
AK10-240C-Y  
AK10-270C-Y  
AK10-380C-Y  
AK10-430C-Y  
AK10-530C-Y

### Part Marking System

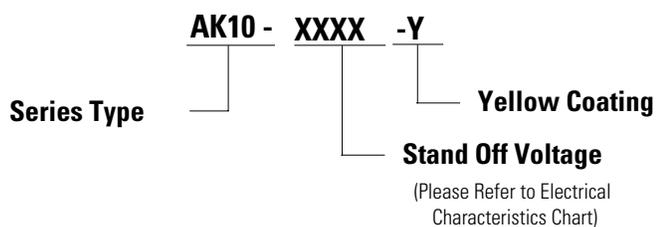

### Packing Options

Part Number	Component Package	Quantity	Packaging Option
AK10XXXX-Y	AK Package	56pcs/Box	Bulk
AK10-XXXX-Y-12	AK Package	12pcs/Box	Bulk

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.