PART NUMBER	RATING (A)	STAMP COLOR	RATING (VDC)	PLATING	TYPE
0298060.ZXSCP	60	RED	72	SILVER	2
0298400.ZXSCP	400	RED	72	NONE	1

60A TIME CURRENT CHARACTERISTICS		
% RATED CURRENT	OPENING TIME	
	MINIMUM	MAXIMUM
100%	4 HOURS	-
135%	120 SEC.	1800 SEC.
200%	1 SEC.	15 SEC.
350%	0.3 SEC.	5 SEC.
600%	0.1 SEC.	1.0 SEC.

400A TIME CURRENT CHARACTERISTICS		
% RATED CURRENT	OPENING TIME	
	MINIMUM	MAXIMUM
75%	4 HOURS	-
200%	1 SEC.	15 SEC.
350%	0.5 SEC.	5 SEC.
500%	0.1 SEC.	2 SEC.

LTR	DATE	REVISION	CHK	APD
A	12/19/00	60455 - RELEASE PJM		
B	08/28/03	83242D-ADD TO NOTE 3 BJJ		
C	02/02/04	61364-RELEASED 0298060.ZXSCP BJJ		
D	04/29/05	84305D-ADD NOTE 4 & TIME CURRENT CHTS PJM		
E	03/23/07	85414D-REDRAWN IN UG GMB		
F	05/15/15	511883ECA-REMOVE DATE CODE FROM THE ELEMENT AND LOCATED ON ANY COVER, ADD "2X" TO THE DIAMETERS OF THE HOLES,		
		ADD MATERIAL SPEC & FINISH. OPL		

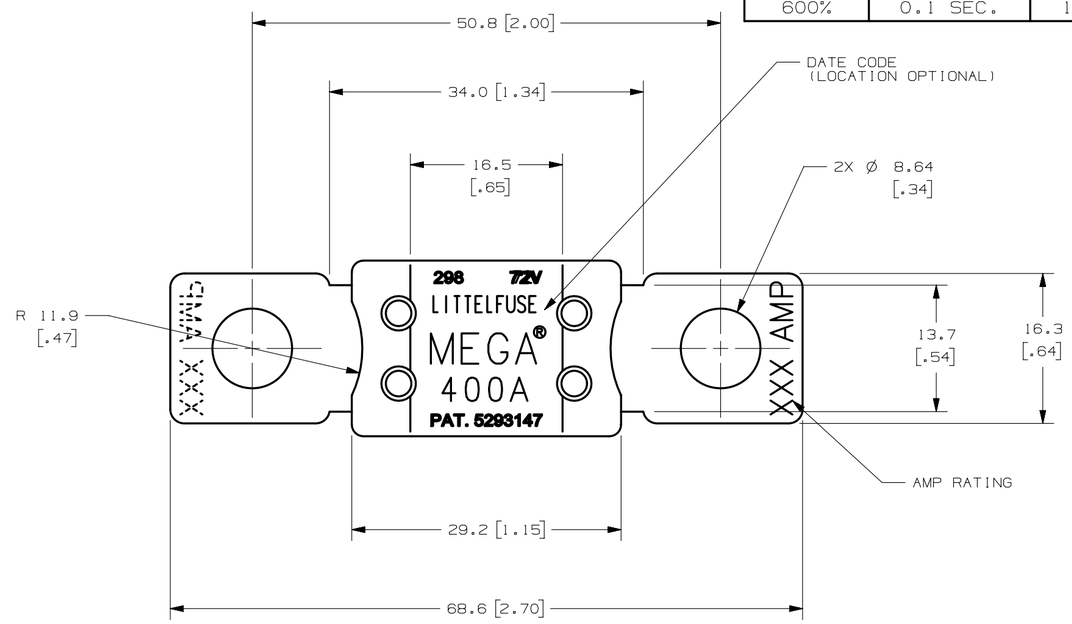

NOTES:

1. RATING APPEARS ON BOTH COVERS.
2. THE AMPERAGE RATING IS ALSO STAMPED ON THE ELEMENT (BOTH SIDES AS SHOWN).
3. CABLE TERMINALS THAT CONNECT TO MEGA FUSE TERMINALS MUST LIE IN THE SAME PLANE. NON-COPLANARITY NOT TO EXCEED ±0.3mm.
4. RECOMMENDED TORQUE FORCE IS 12-18 Nm [106-159 IN-LBS].

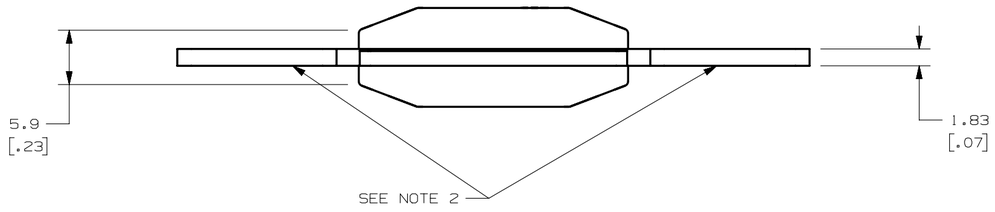

TYPE 1

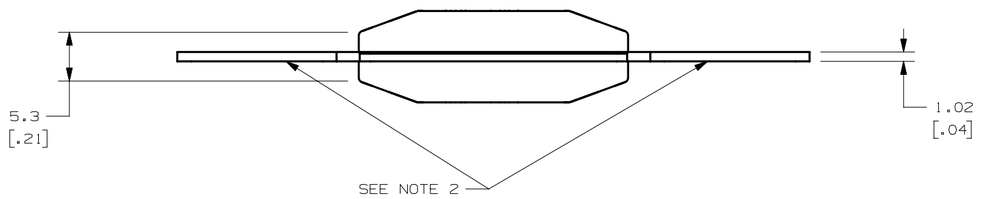

TYPE 2







INCORRECT



INCORRECT



CORRECT



CORRECT

SEE NOTE 3

METRIC

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
-				
-				
-				

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC
ELEMENT: 60A: BRASS C260; 400A: Cu 102
COVER: PA6T/66-GF35%, NATURAL

FINISH
SEE CHART

DRW PJM	DATE 12/19/00	SCALE 2:1
CHK	DATE	SUPER DR
APPD	DATE	FINSH GOOD WT GRAMS/PIECE

TOLERANCE UNLESS OTHERWISE SPECIFIED
ONE PLACE DEC +/-.3
TWO PLACE DEC +/-.25
THREE PLACE DEC +/-.100
ANGULAR +/-1°

3RD ANGLE PROJECTION

TITLE: MEGA SHORT CIRCUIT PROTECTOR (72V)

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION	DRWG. NO.	OUTLINE
F	0298000.ZXSCP	

CAD GENERATED DRAWING – NO PENCIL CHANGES ALLOWED