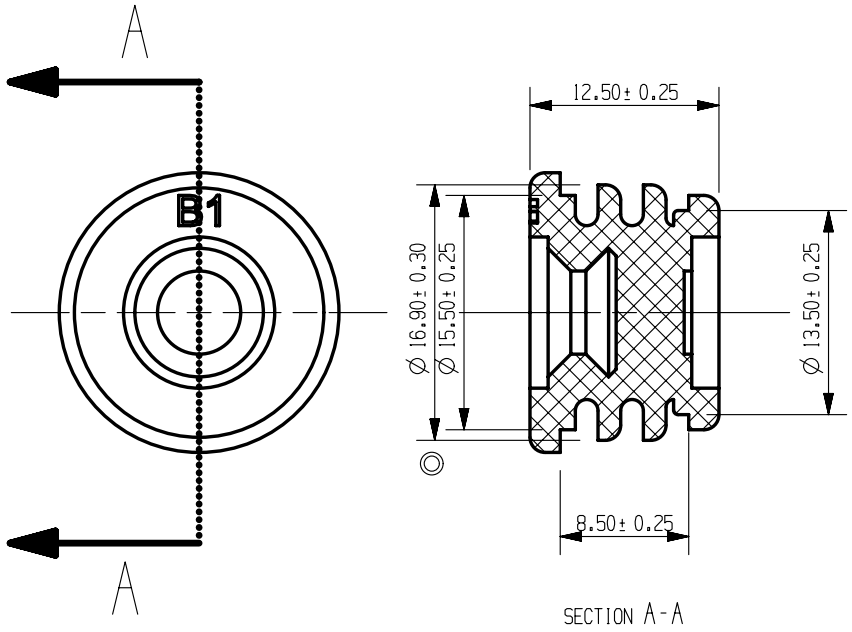

NOTES:
1. MATERIAL:SILICON RUBBER
2. GRAY COLOR
3. 30 DURE HARD ◎

METRIC
COMPONENT

LTR	REVISION	CHK	APD
A	504799ERA NEW RELEASED EJIN		

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
-				

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
⟨ST⟩	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC: SEE NOTES

FINISH: N/A

DRW EJIN	DATE 03/29/12	SCALE 1:1
CHK	DATE	SUPER DR
APPD	DATE	FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

DIMENSION	0.5 - 3 (UP TO)	3 - 6 (OVER / UP TO)	6 - 30 (OVER / UP TO)	30 - 120 (OVER / UP TO)	120 - 400 (OVER / UP TO)
TOLERANCE					

3RD ANGLE PROJECTION

TITLE: BLANK_1 CABLE SEAL

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: A

DRWG. NO.: OL-868-951

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED