

| | REVISION | | | | | | |
|--|----------|---------|------------------------------------|--|--|--|--|
| | REV | DATE | DESCRIPTION | | | | |
| | Α | 6/25/18 | 519469GCP - RELEASE PER EM3026 MRY | | | | |
| | В | 3/31/22 | 524923ECP/D - ADD TOLERANCES MRY | | | | |

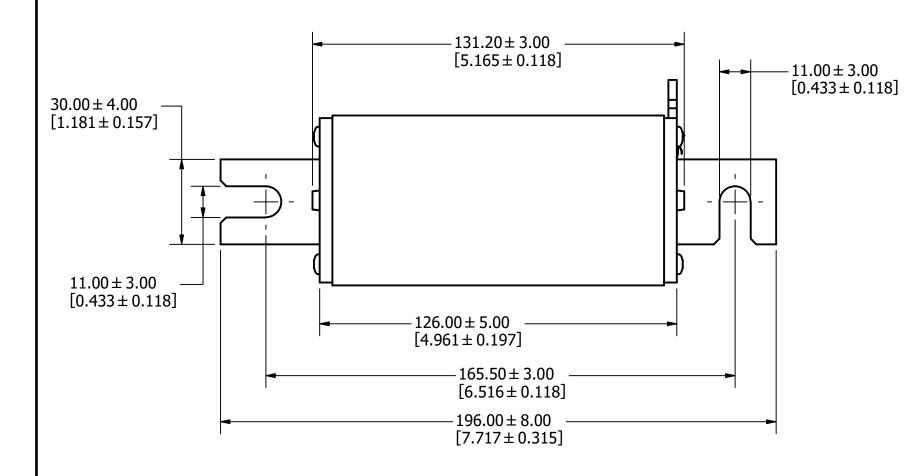

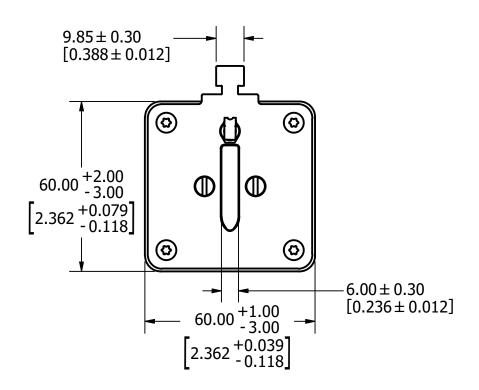

| • | DEN | IOTES CRITICAL CHARA | CTERISTICS. | | | |
|--|------|--|--|-----------------------------|--|--|
| СРК | DEN | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | | | |
| (ST) | OF I | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | | | |
| CP DENOTES CP DIMENSIONS, MUST BE WITHIN THE DIM SHOWN ON DRAWING AND ALLOW FOR MAXIMUM TOO | | | ENSIONAL LIMITATIONS INITIALLY LOCATED TO | | | |
| MATL SPEC | | | FINISH | | | |
| ORW MYORK | | DATE 4/18/2018 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN | | | | | | |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION

TITLE

1500VDC SIZE 2XL W/ S-BLADE PHOTOVOLTAIC FUSE W/ MICROSWITCH INTERFACE OUTLINE

| | Littelfuse |
|--|-------------------------|
| | CHICAGO, ILLINOIS 60631 |

REVISION DRWG NO.

OL-SPNH.X2XLDLMS

SHEET 1 OF 1