
REV	DA
Α	6/2
В	12/

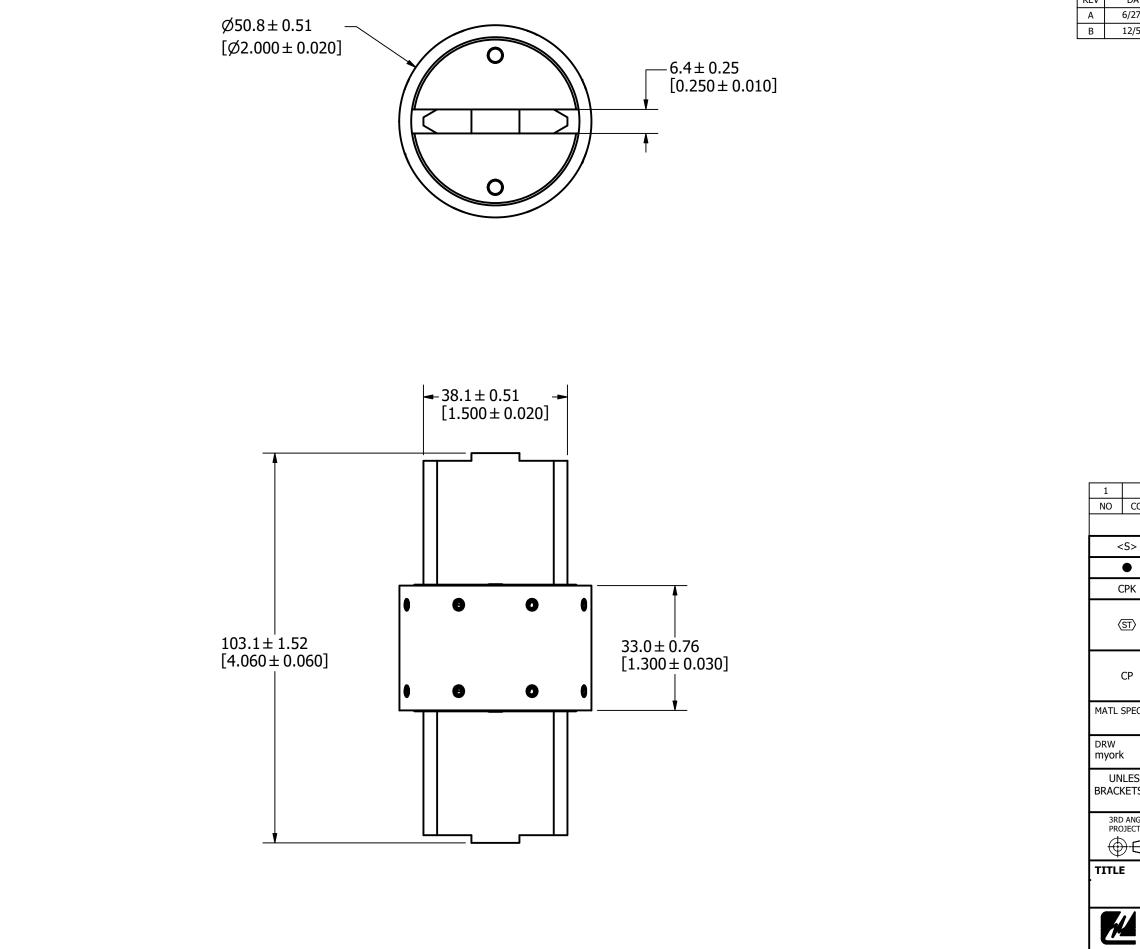

REVISION				
ATE	DESCRIPTION			
27/23	526621GCP - RELEASE MRY			
/5/23	527208ECP/D - UPDATE DIMENSION MRY			

1	1										
NO	NO COMPONENT NO		[DESCI	RIPTIO	N	QTY/M	U/M			
BILL OF MATERIAL											
<s> CRITICAL CHARACTERIS</s>				STIC	TIC FOR PART SAFETY/COMPLIANCE						
	DENOTES CRITICAL CHARACTERISTICS.										
C	СРК	PK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE									
<	<u>st</u> >	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.									
	СР	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.									
MATL SPEC				FINISH							
DRW			DATE 6/14/2023				FINISH GOOD WT				
myork 6/14/20			NTS			GRAMS/PIECE					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994											
3RD ANGLE PROJECTION											
TITLE L17T 800A IN 1200A CASE SIZE OUTLINE											
Littelfuse CHICAGO, ILLINOIS 60631			REV	ISION	DRWG NO.	SHEET 1 OF 1					
				В	OL-L17T	800.V1200					