
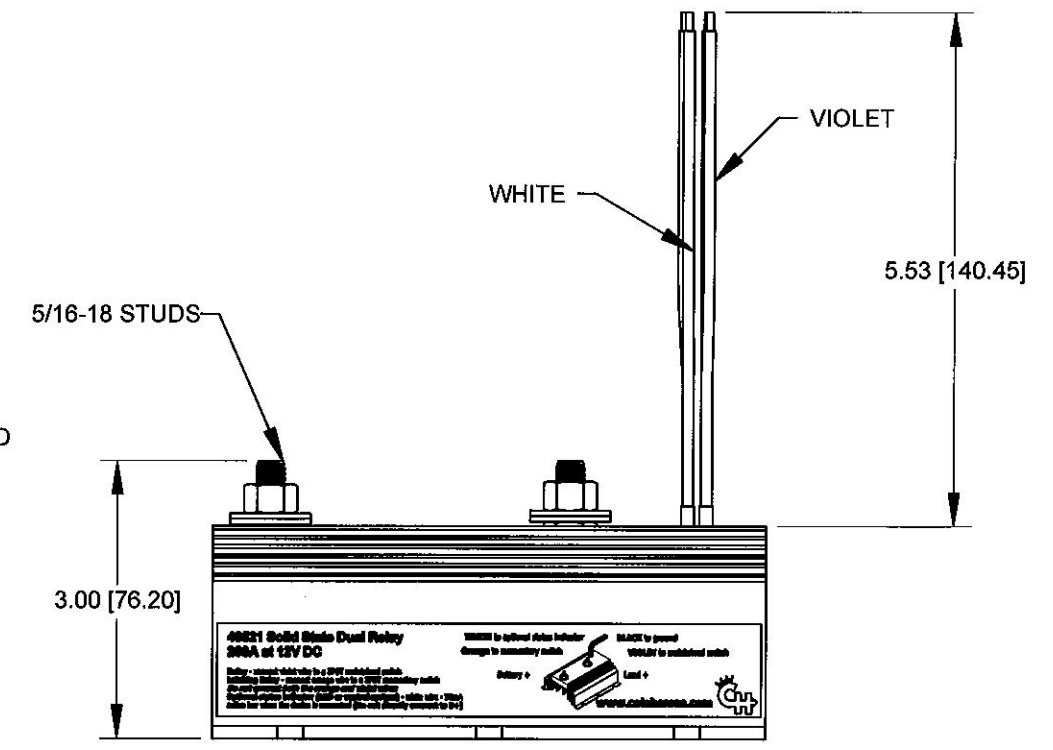
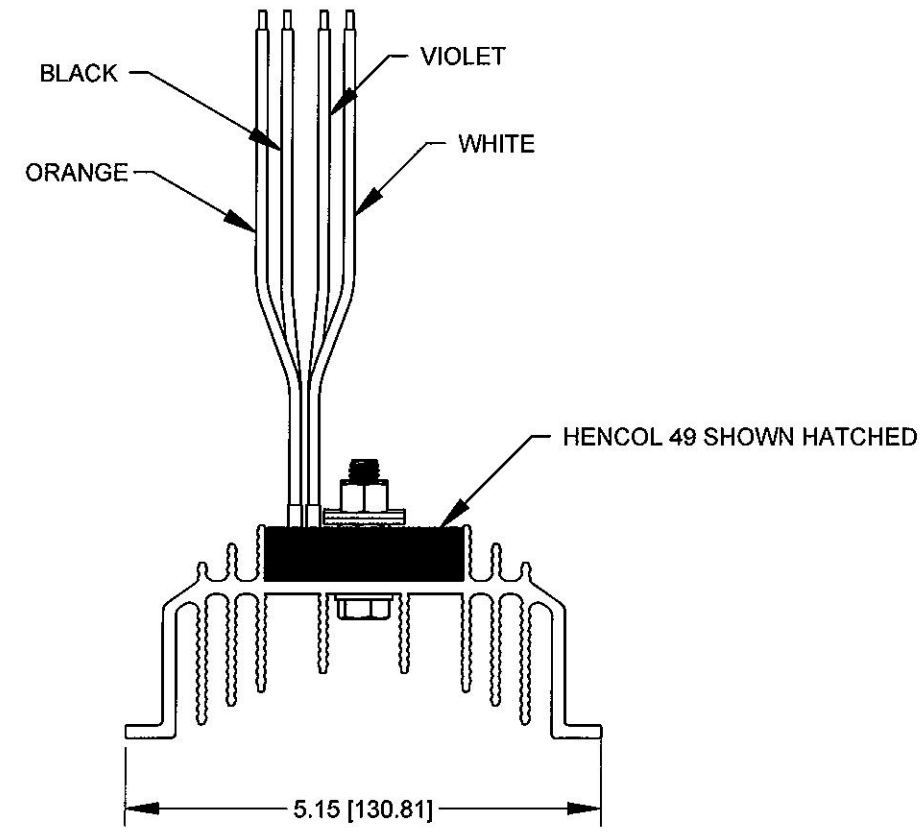
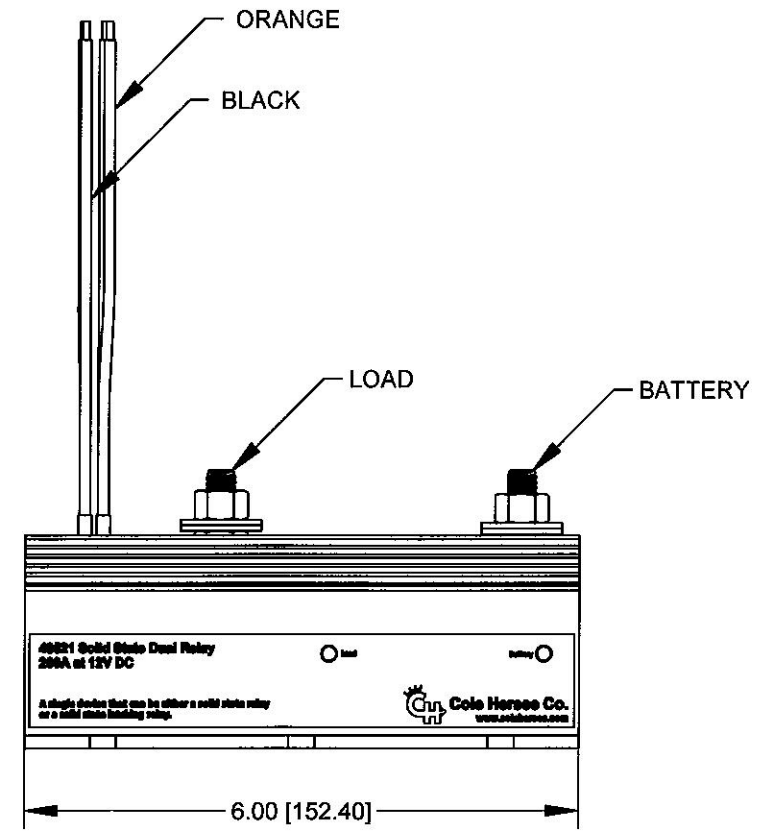


- NOTES:
1. ALL BRASS HARDWARE IS TIN PLATED
 2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
 3. SPECIFICATIONS:
CURRENT RATING: 200A CONTINUOUS
OPERATING VOLTAGE RANGE: 9-16 VDC
OPERATING TEMP: -40 TO 85 DEG. C
OVERCURRENT THRESHOLD APPROX. 250A
MAX CURRENT IN-RUSH: 500A FOR 5 SEC.
 4. WIRE FUNCTIONS:
BLACK: GROUND
ORANGE: LATCH
VIOLET: RELAY
WHITE: STATUS, ACTIVE LOW 50mA MAX.
 5. TORQUE 5/16-18 NUTS TO 65IN-LBS [7.3 N.m] MAX
 6. ALL WIRES ARE 18AWG [0.8 mm sq] SXL

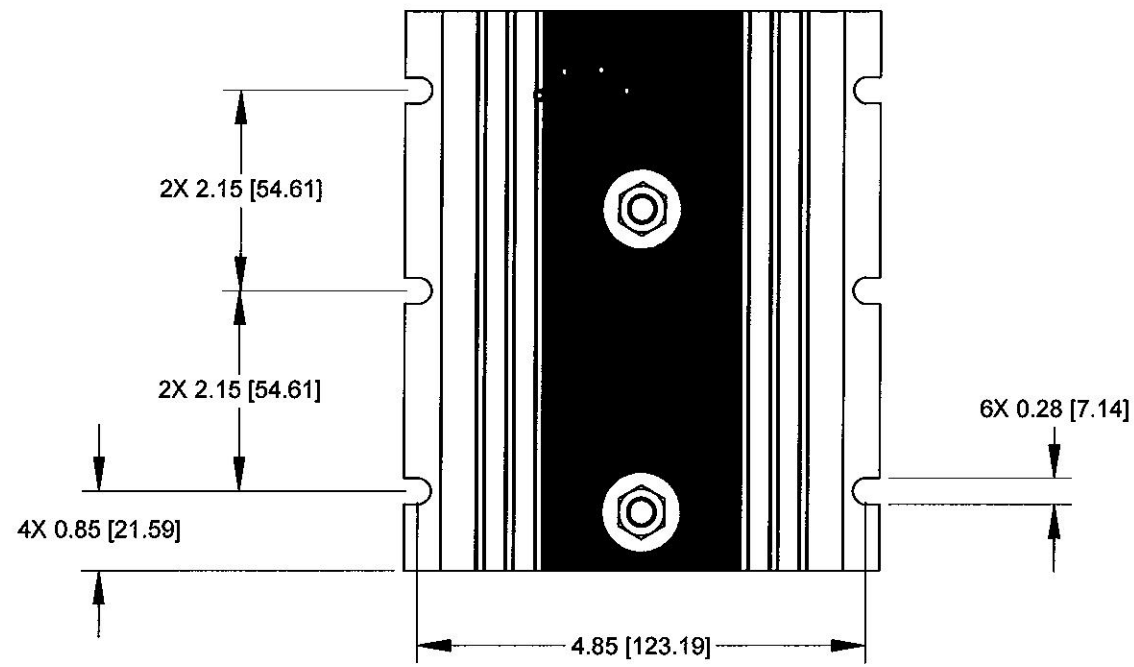

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances: 2-places 3-places Angular +/- 0.02" +/- 0.005" +/- 1° Metric: Shown in [] refers to equivalent English Dim Tol "REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only. NOTE: All tolerances are Non-Cumulative.		PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.		Special Characteristics: Critical Characteristic, relating to Safety and/or Regulatory Compliance Significant Characteristic relating to Process Control Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer		Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com		
Rev.	Description of Change	ECN No.	Date													
A	INITIAL RELEASE	09376	07/20/09													

FORM CHT-6 (2/07)

Used On or Ref.: EX28667

Scale: 1-2

Drawn By: CN

Date Drawn: 07/20/09

Pg. 1 of 1

Description:

200A DUAL RELAY

Drawing / Part No.: 48521

Current Rev. A



Cole Hersee Co.
20 Old Colony Ave., South Boston, MA, 02127
Phn: 617-268-2100 Web: www.colehersee.com