





SPECIF





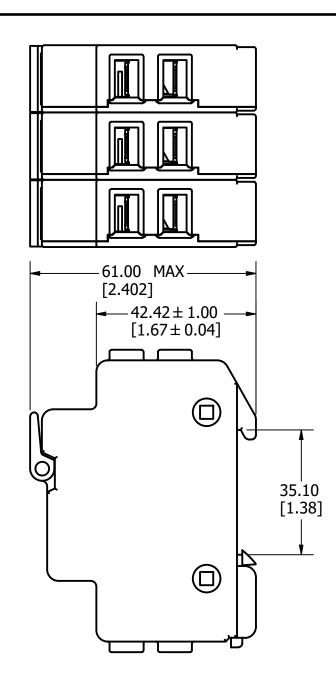

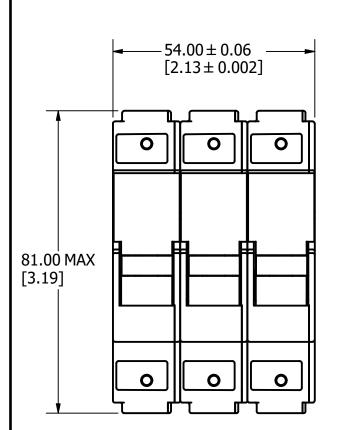

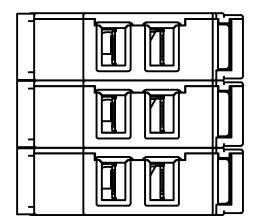

REVISION							
ATE	DESCRIPTION						
2/22	525636GCP - RELEASE MRY						
3/22	525897ECP/D - ADD DEPTH DIMENSION MRY						

ICATIONS:	
-----------	--

## VOLTAGE RATING: 600VAC/DC

- AMPERE RATING: 30 AMPERES
- INTERRUPT RATING: 100kA
- TERMINAL TYPE: 1/4" QUICK CONNECT

## APPROVALS: UL RECOGNIZED (E14721) CSA CERTIFIED (LR7316) (CCC APPROVED (2010010308391538)

COMPONEN		DESCRIPTION				OTY/M	U/M			
BILL OF MATERIAL										
>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE									
	DENOTES CRITICAL CHARACTERISTICS.									
(	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE									
>	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.									
	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.									
EC				FINISH						
DATE 8/26/2022				SCALE NTS		FINISH GOOD WT GRAMS/PIECE				
Stormy field SS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN IS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
LPSM003QCID OUTLINE										
i+	tel	fuse®	RE\	/ISION	DRWG NO.	SHEET	1 OF 1			
CHICAGO, ILLINOIS 60631				В	OL-LPSN	-LPSM003QCID				