



| PART NO. | TYPE |
|------------|------|
| 10E1C2.75 | 1 |
| 15E1C2.75 | 1 |
| 20E1C2.75 | 1 |
| 25E1C2.75 | 1 |
| 30E1C2.75 | 1 |
| 40E1C2.75 | 1 |
| 50E1C2.75 | 1 |
| 65E1C2.75 | 1 |
| 80E1C2.75 | 1 |
| 100E1C2.75 | 1 |
| 125E1C2.75 | 1 |
| 125E2C2.75 | 2 |
| 150E1C2.75 | 1 |
| 150E2C2.75 | 2 |
| 200E1C2.75 | 1 |
| 200E2C2.75 | 2 |
| 250E2C2.75 | 2 |
| 300E2C2.75 | 2 |
| 350E2C2.75 | 2 |
| 400E2C2.75 | 2 |
| 450E2C2.75 | 2 |

| REVISION | | |
|----------|-----------|-------------------------|
| REV | DATE | DESCRIPTION |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

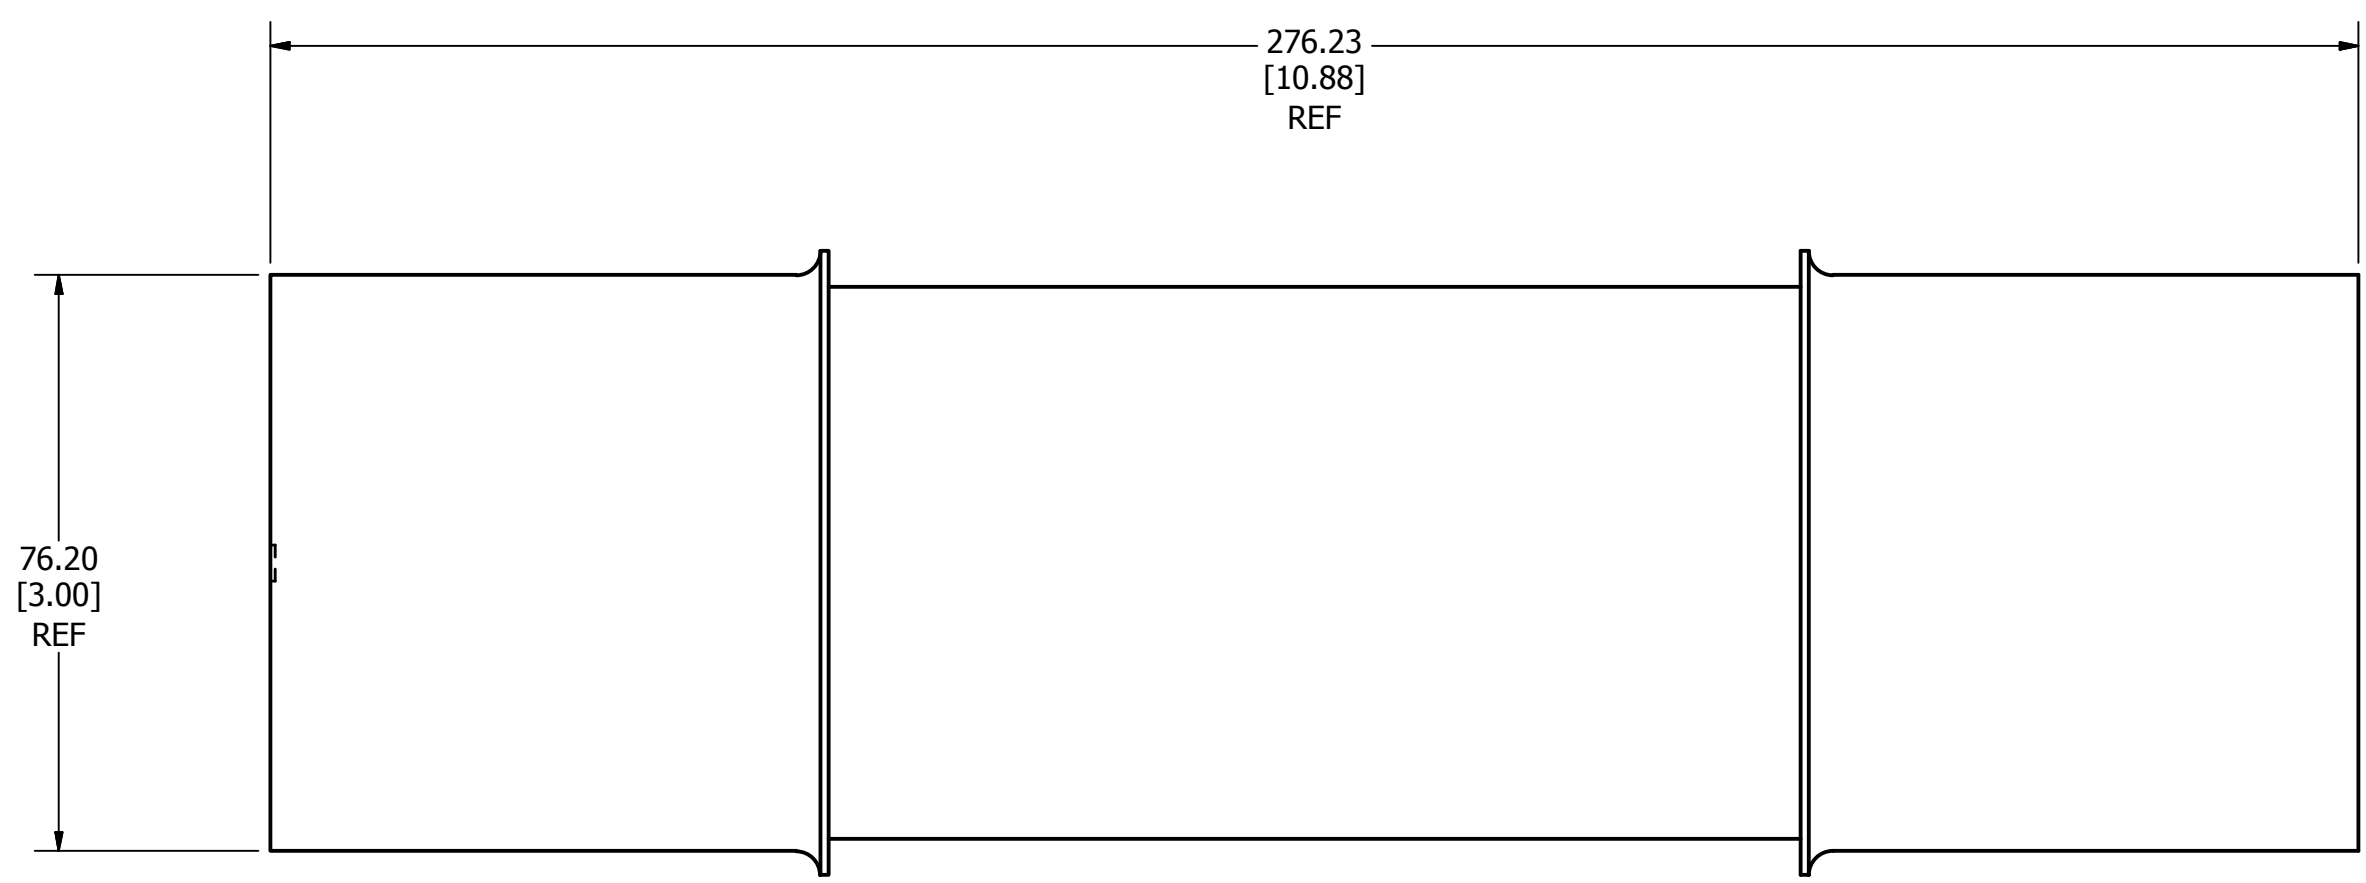

TYPE 1



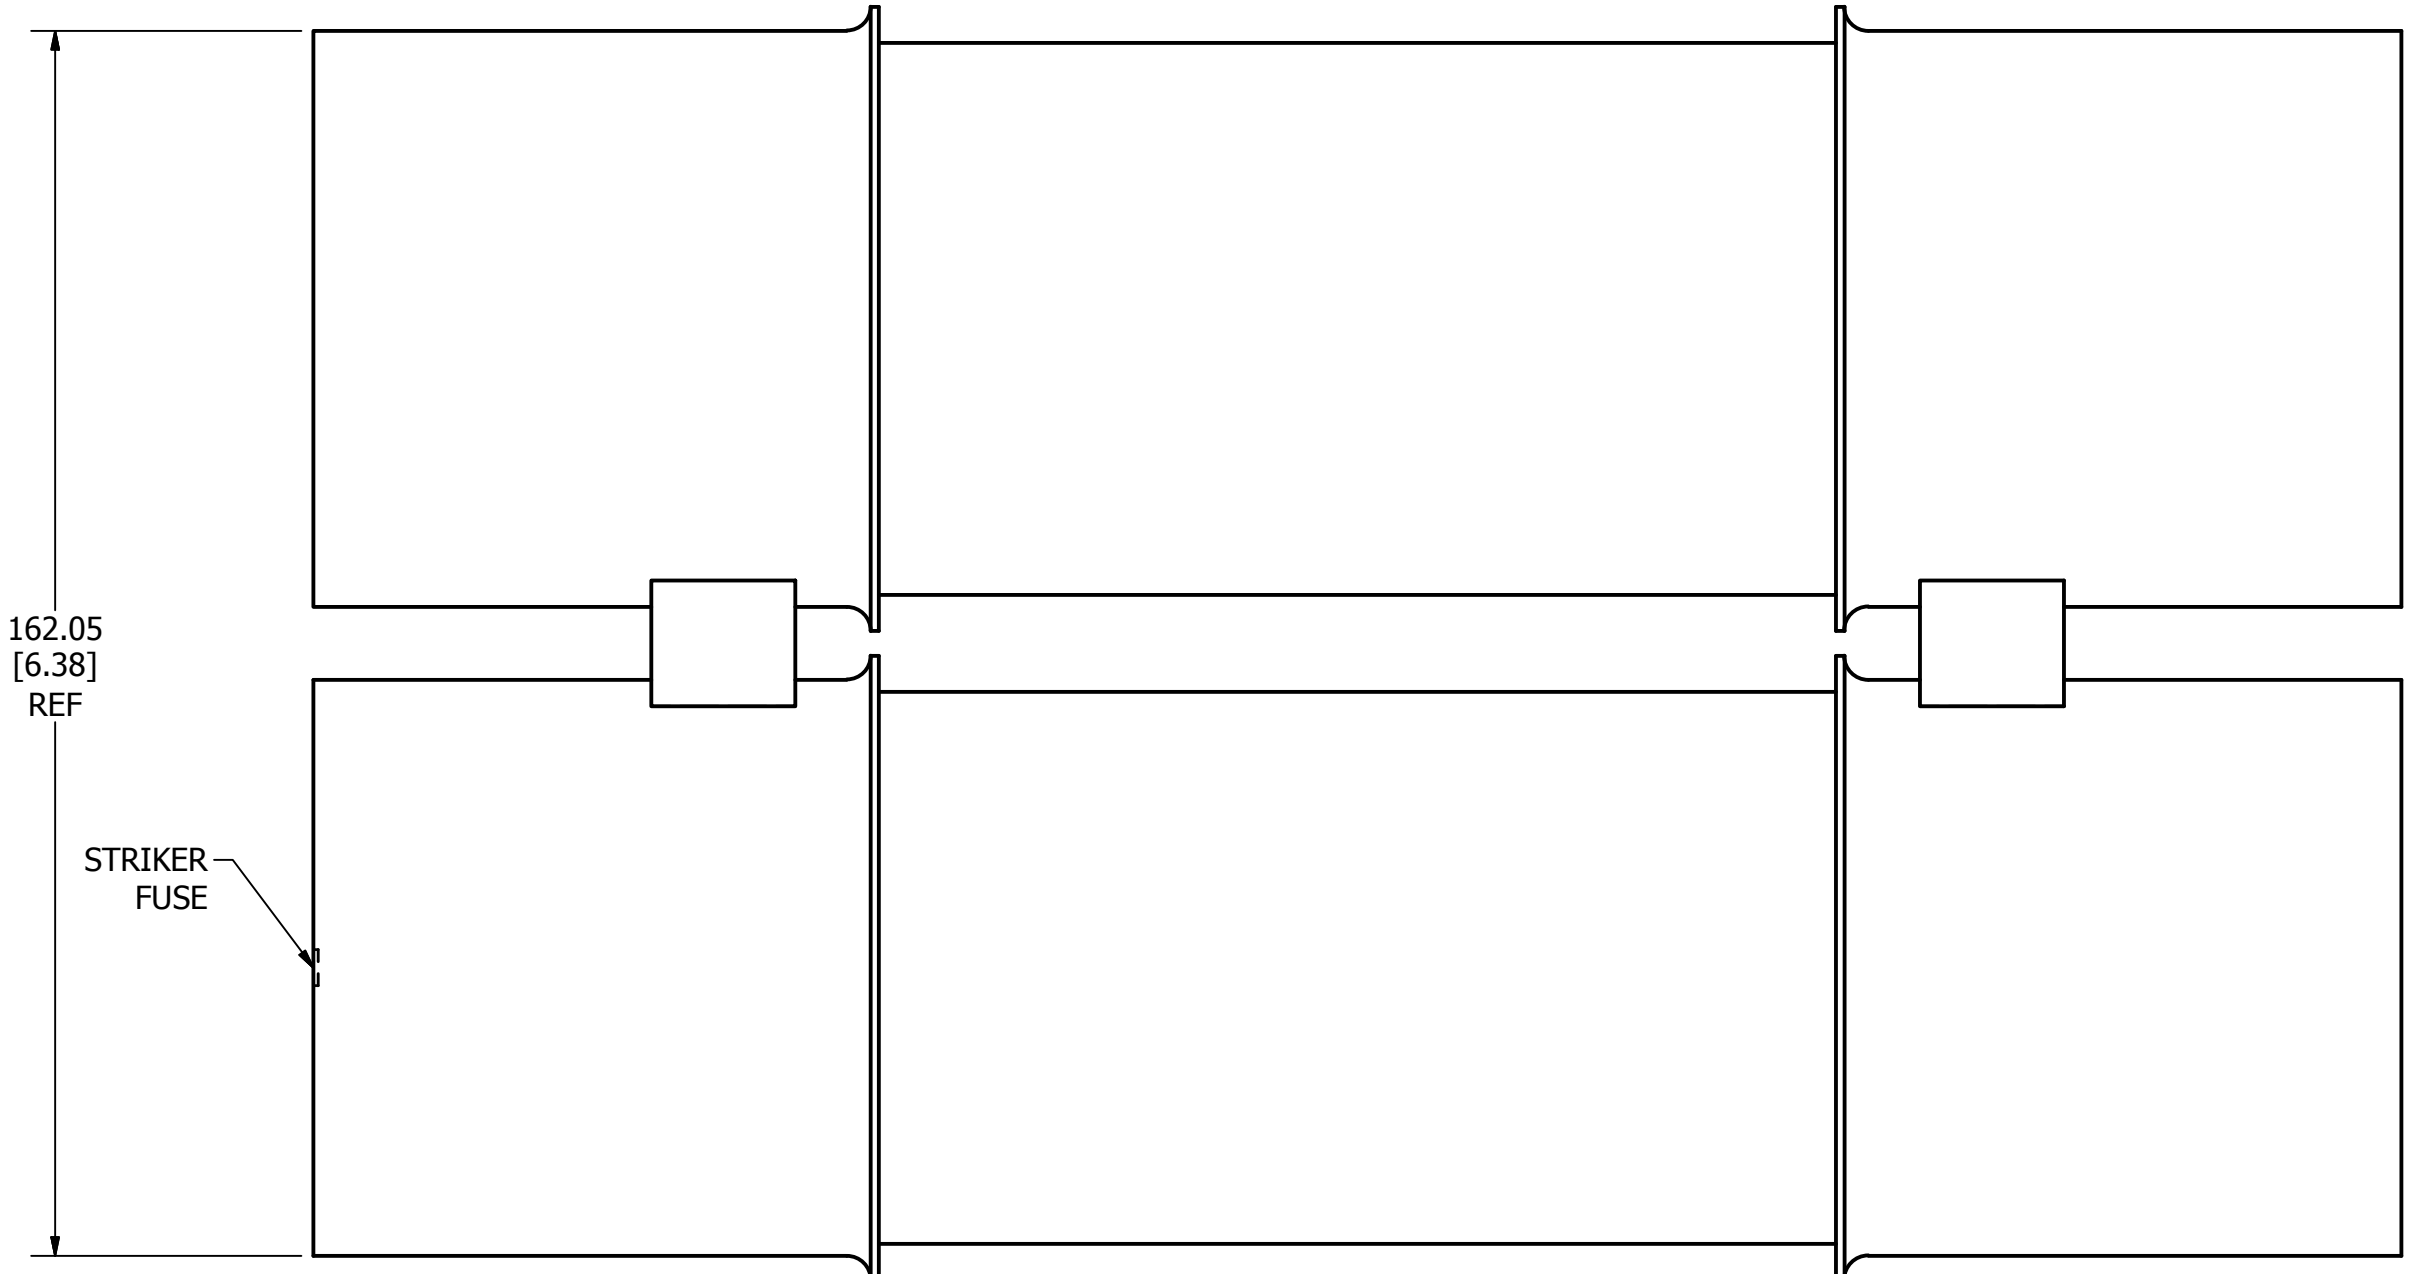


TYPE 2

| | | | |
|---|--|------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 450E 2.75KV OUTLINE | | | |
| CHICAGO, ILLINOIS 60631 | | REVISION A | DRWG NO. OL-ERATEDC2.75 |
| SHEET 1 OF 1 | | | |

| PART NO. | TYPE |
|-----------|------|
| 10E1C5.5 | 1 |
| 15E1C5.5 | 1 |
| 20E1C5.5 | 1 |
| 25E1C5.5 | 1 |
| 30E1C5.5 | 1 |
| 40E1C5.5 | 1 |
| 50E1C5.5 | 1 |
| 65E1C5.5 | 1 |
| 80E1C5.5 | 1 |
| 100E1C5.5 | 1 |
| 125E1C5.5 | 1 |
| 125E2C5.5 | 2 |
| 150E1C5.5 | 1 |
| 150E2C5.5 | 2 |
| 175E1C5.5 | 1 |
| 175E2C5.5 | 2 |
| 200E1C5.5 | 1 |
| 200E2C5.5 | 2 |
| 250E2C5.5 | 2 |
| 300E2C5.5 | 2 |
| 350E2C5.5 | 2 |
| 400E2C5.5 | 2 |
| 450E2C5.5 | 2 |
| 500E3C5.5 | 3 |
| 550E3C5.5 | 3 |
| 600E3C5.5 | 3 |


| REV | DATE | REVISION DESCRIPTION |
|-----|-----------|-------------------------|
| A | 5/28/2014 | 510492GCP - RELEASE MRV |

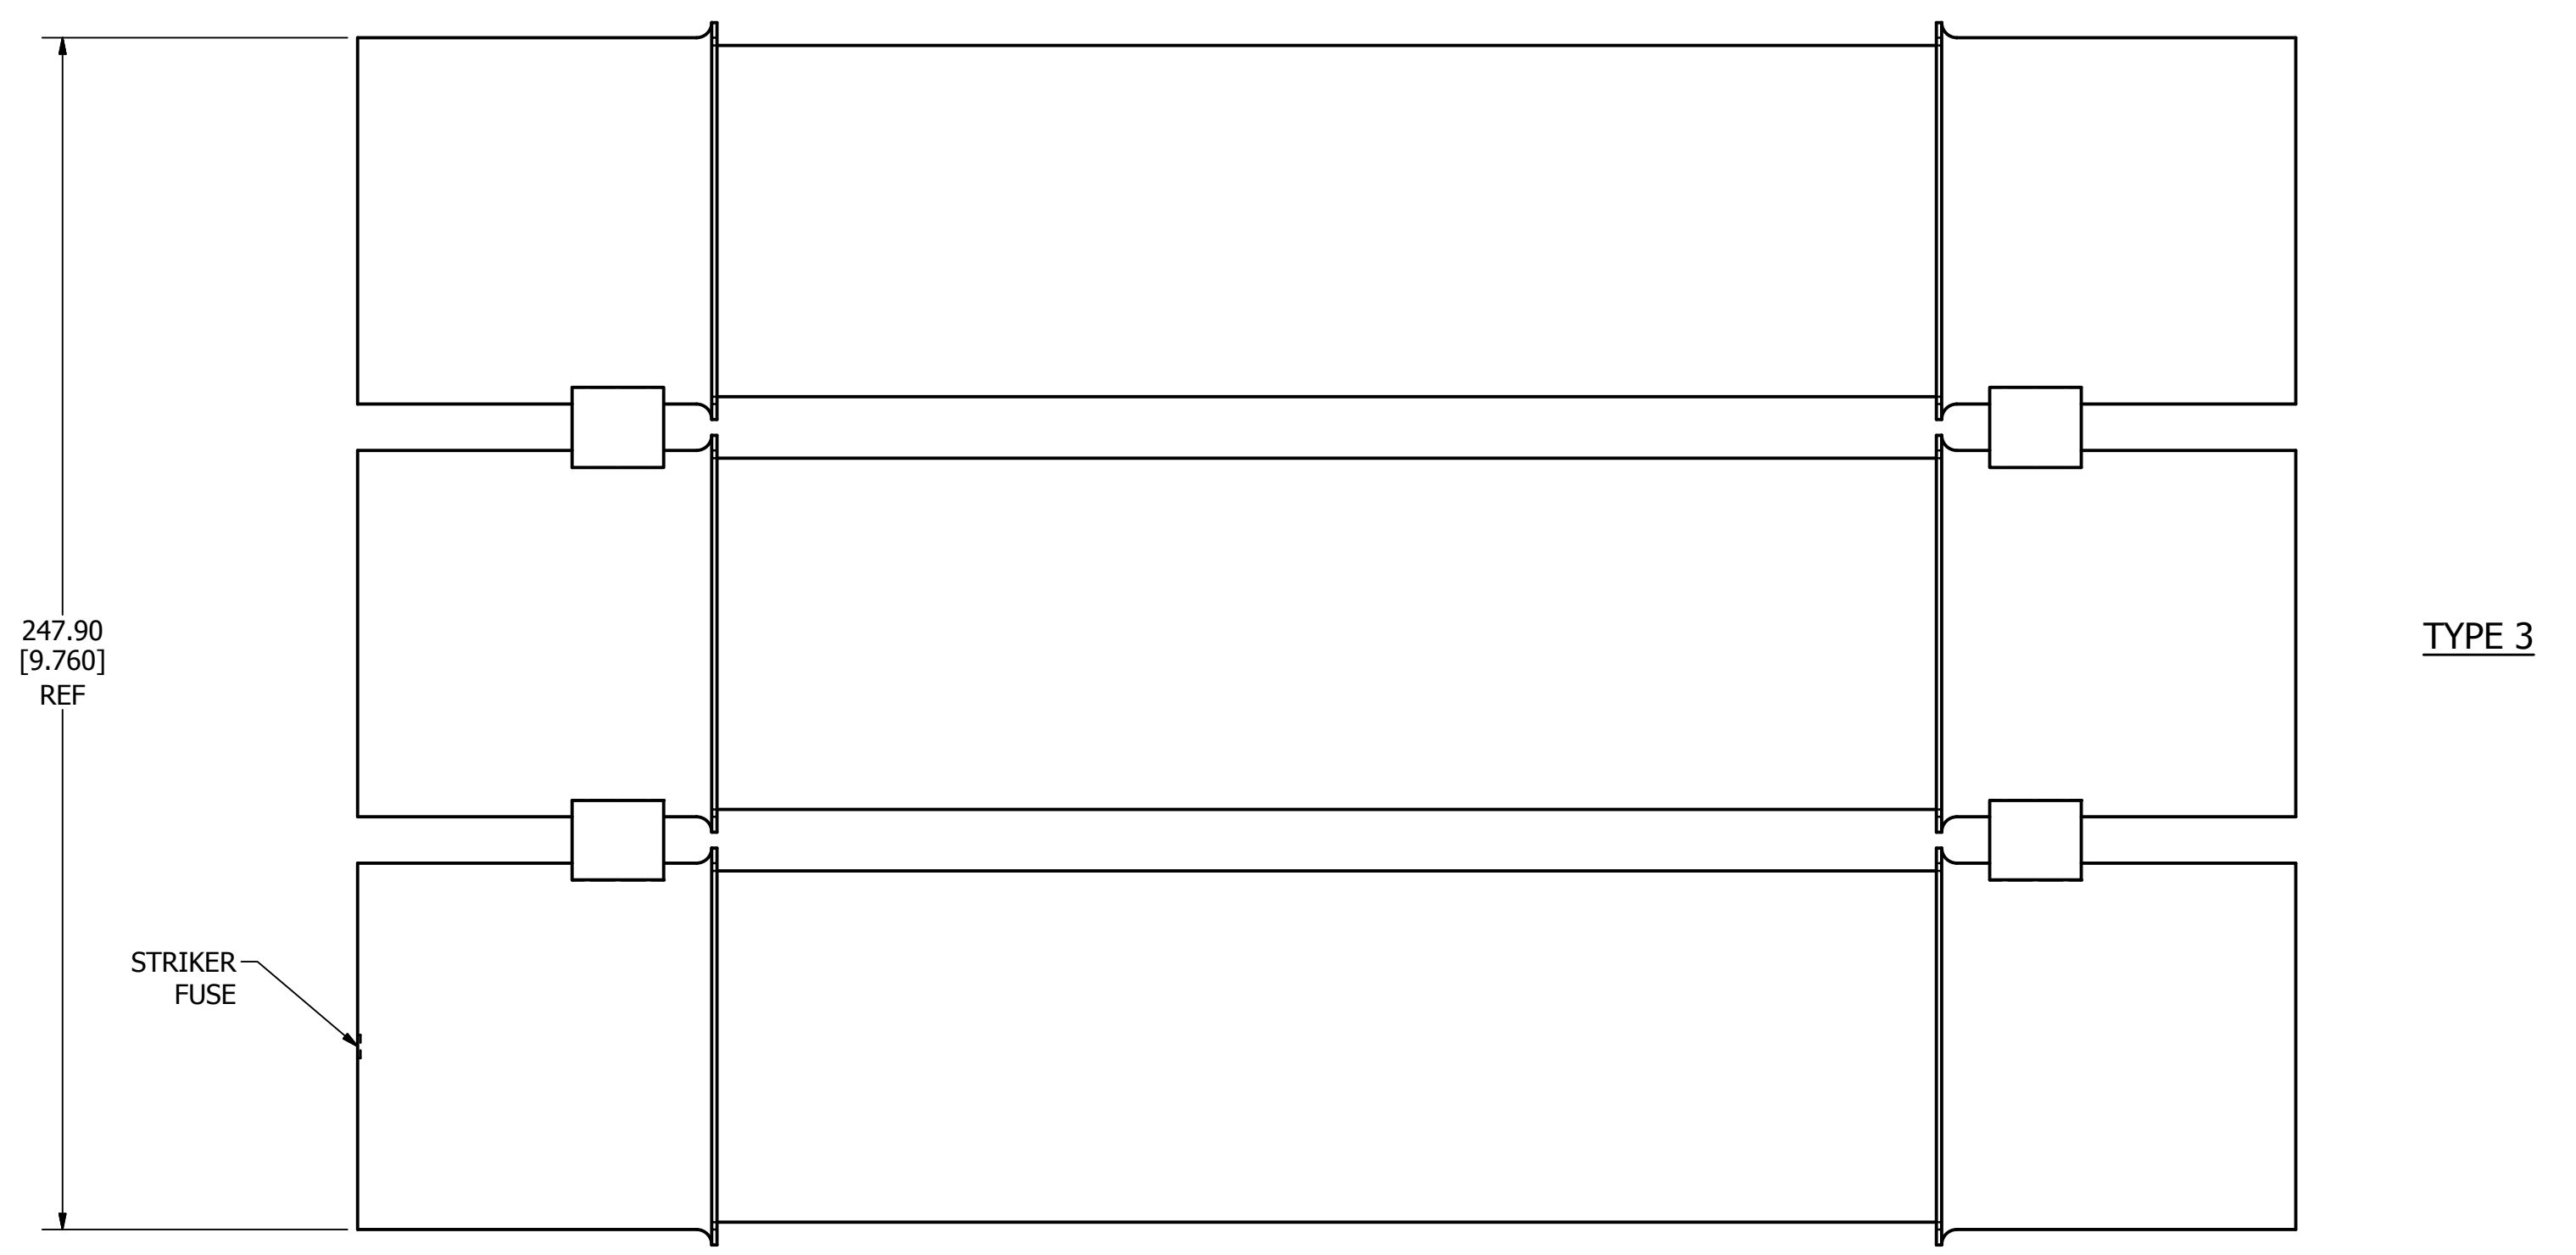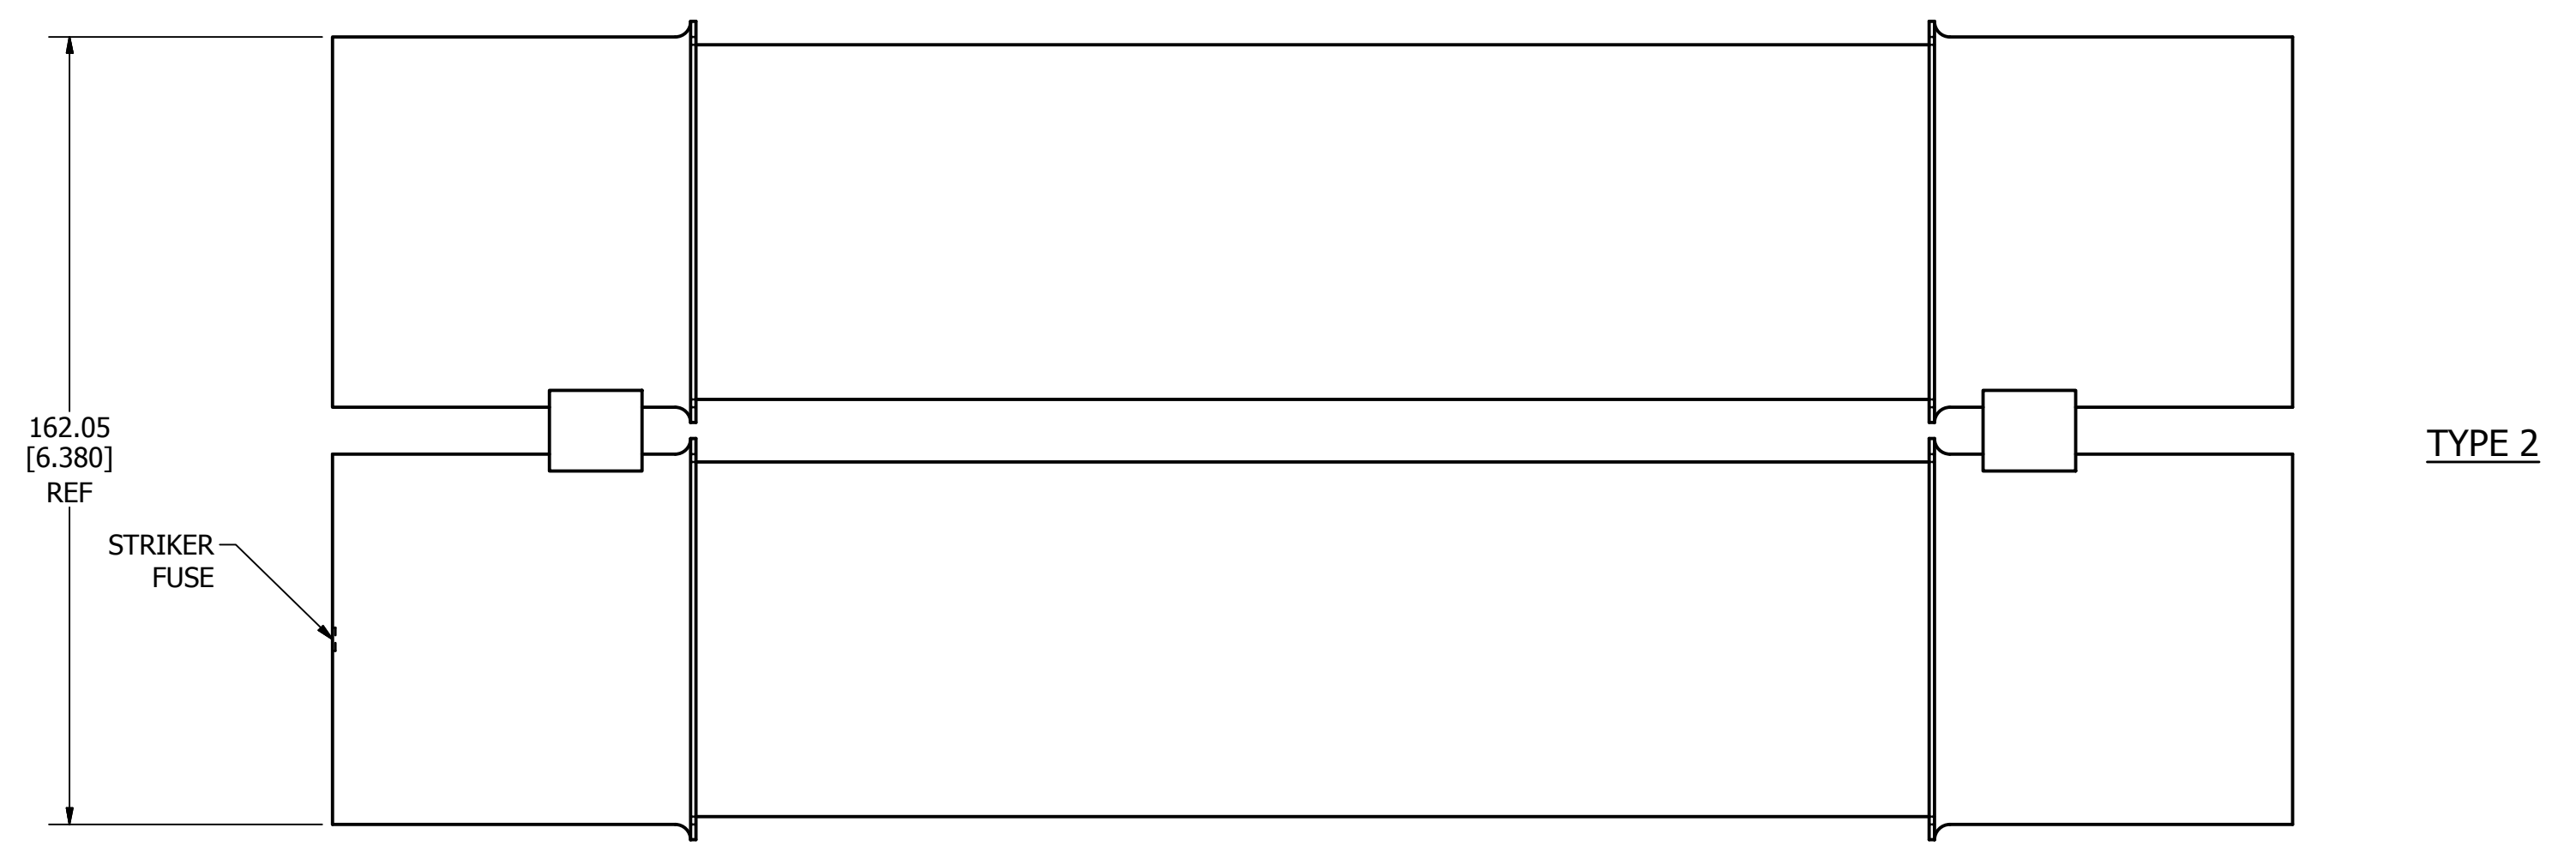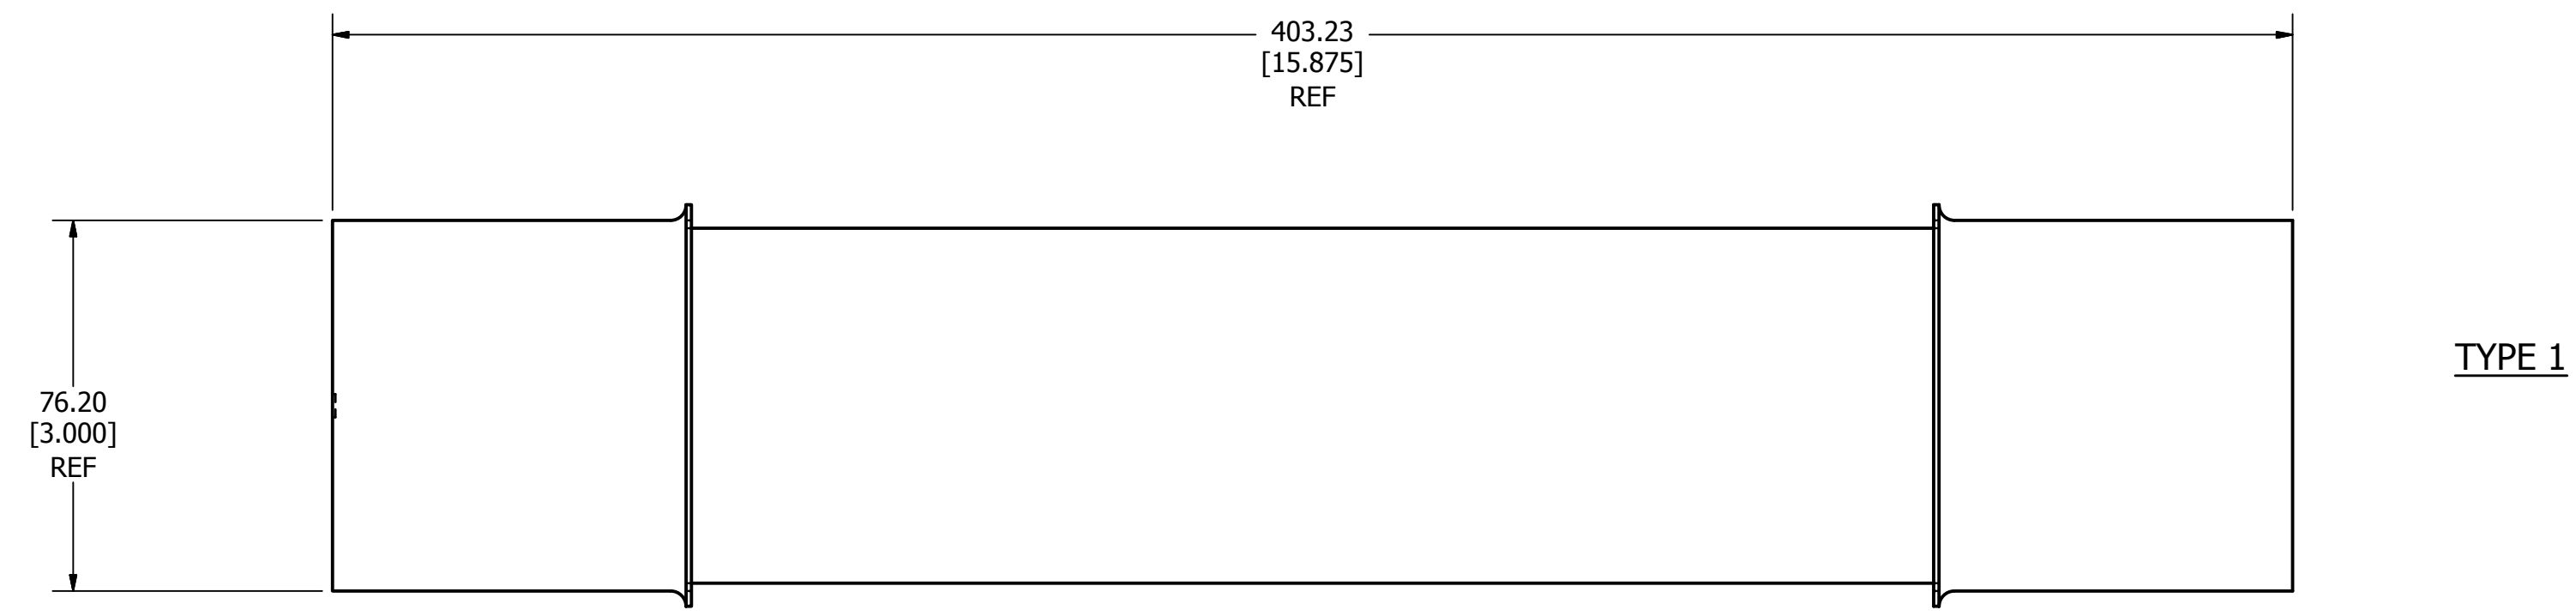

| | | | |
|---|--|------------|-------------------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 600E 5.5KV OUTLINE | | | |
| | | REVISION A | DRWG NO. OL-ERATEDC5.5 SHEET 1 OF 1 |

| PART NO. | TYPE |
|-----------|------|
| 5NLE10E | 1 |
| 5NLE15E | 1 |
| 5NLE20E | 1 |
| 5NLE25E | 1 |
| 5NLE30E | 1 |
| 5NLE40E | 1 |
| 5NLE50E | 1 |
| 5NLE65E | 1 |
| 5NLE80E | 1 |
| 5NLE100E | 1 |
| 5NLE125E | 1 |
| 5NLE150E | 1 |
| 5NLE175E | 1 |
| 5NLE200E | 1 |
| 5NLE2225E | 2 |
| 5NLE2250E | 2 |
| 5NLE2300E | 2 |
| 5NLE2350E | 2 |
| 5NLE2400E | 2 |
| 5NLE2450E | 2 |



| REVISION | | DESCRIPTION |
|----------|-----------|-------------------------|
| REV | DATE | |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

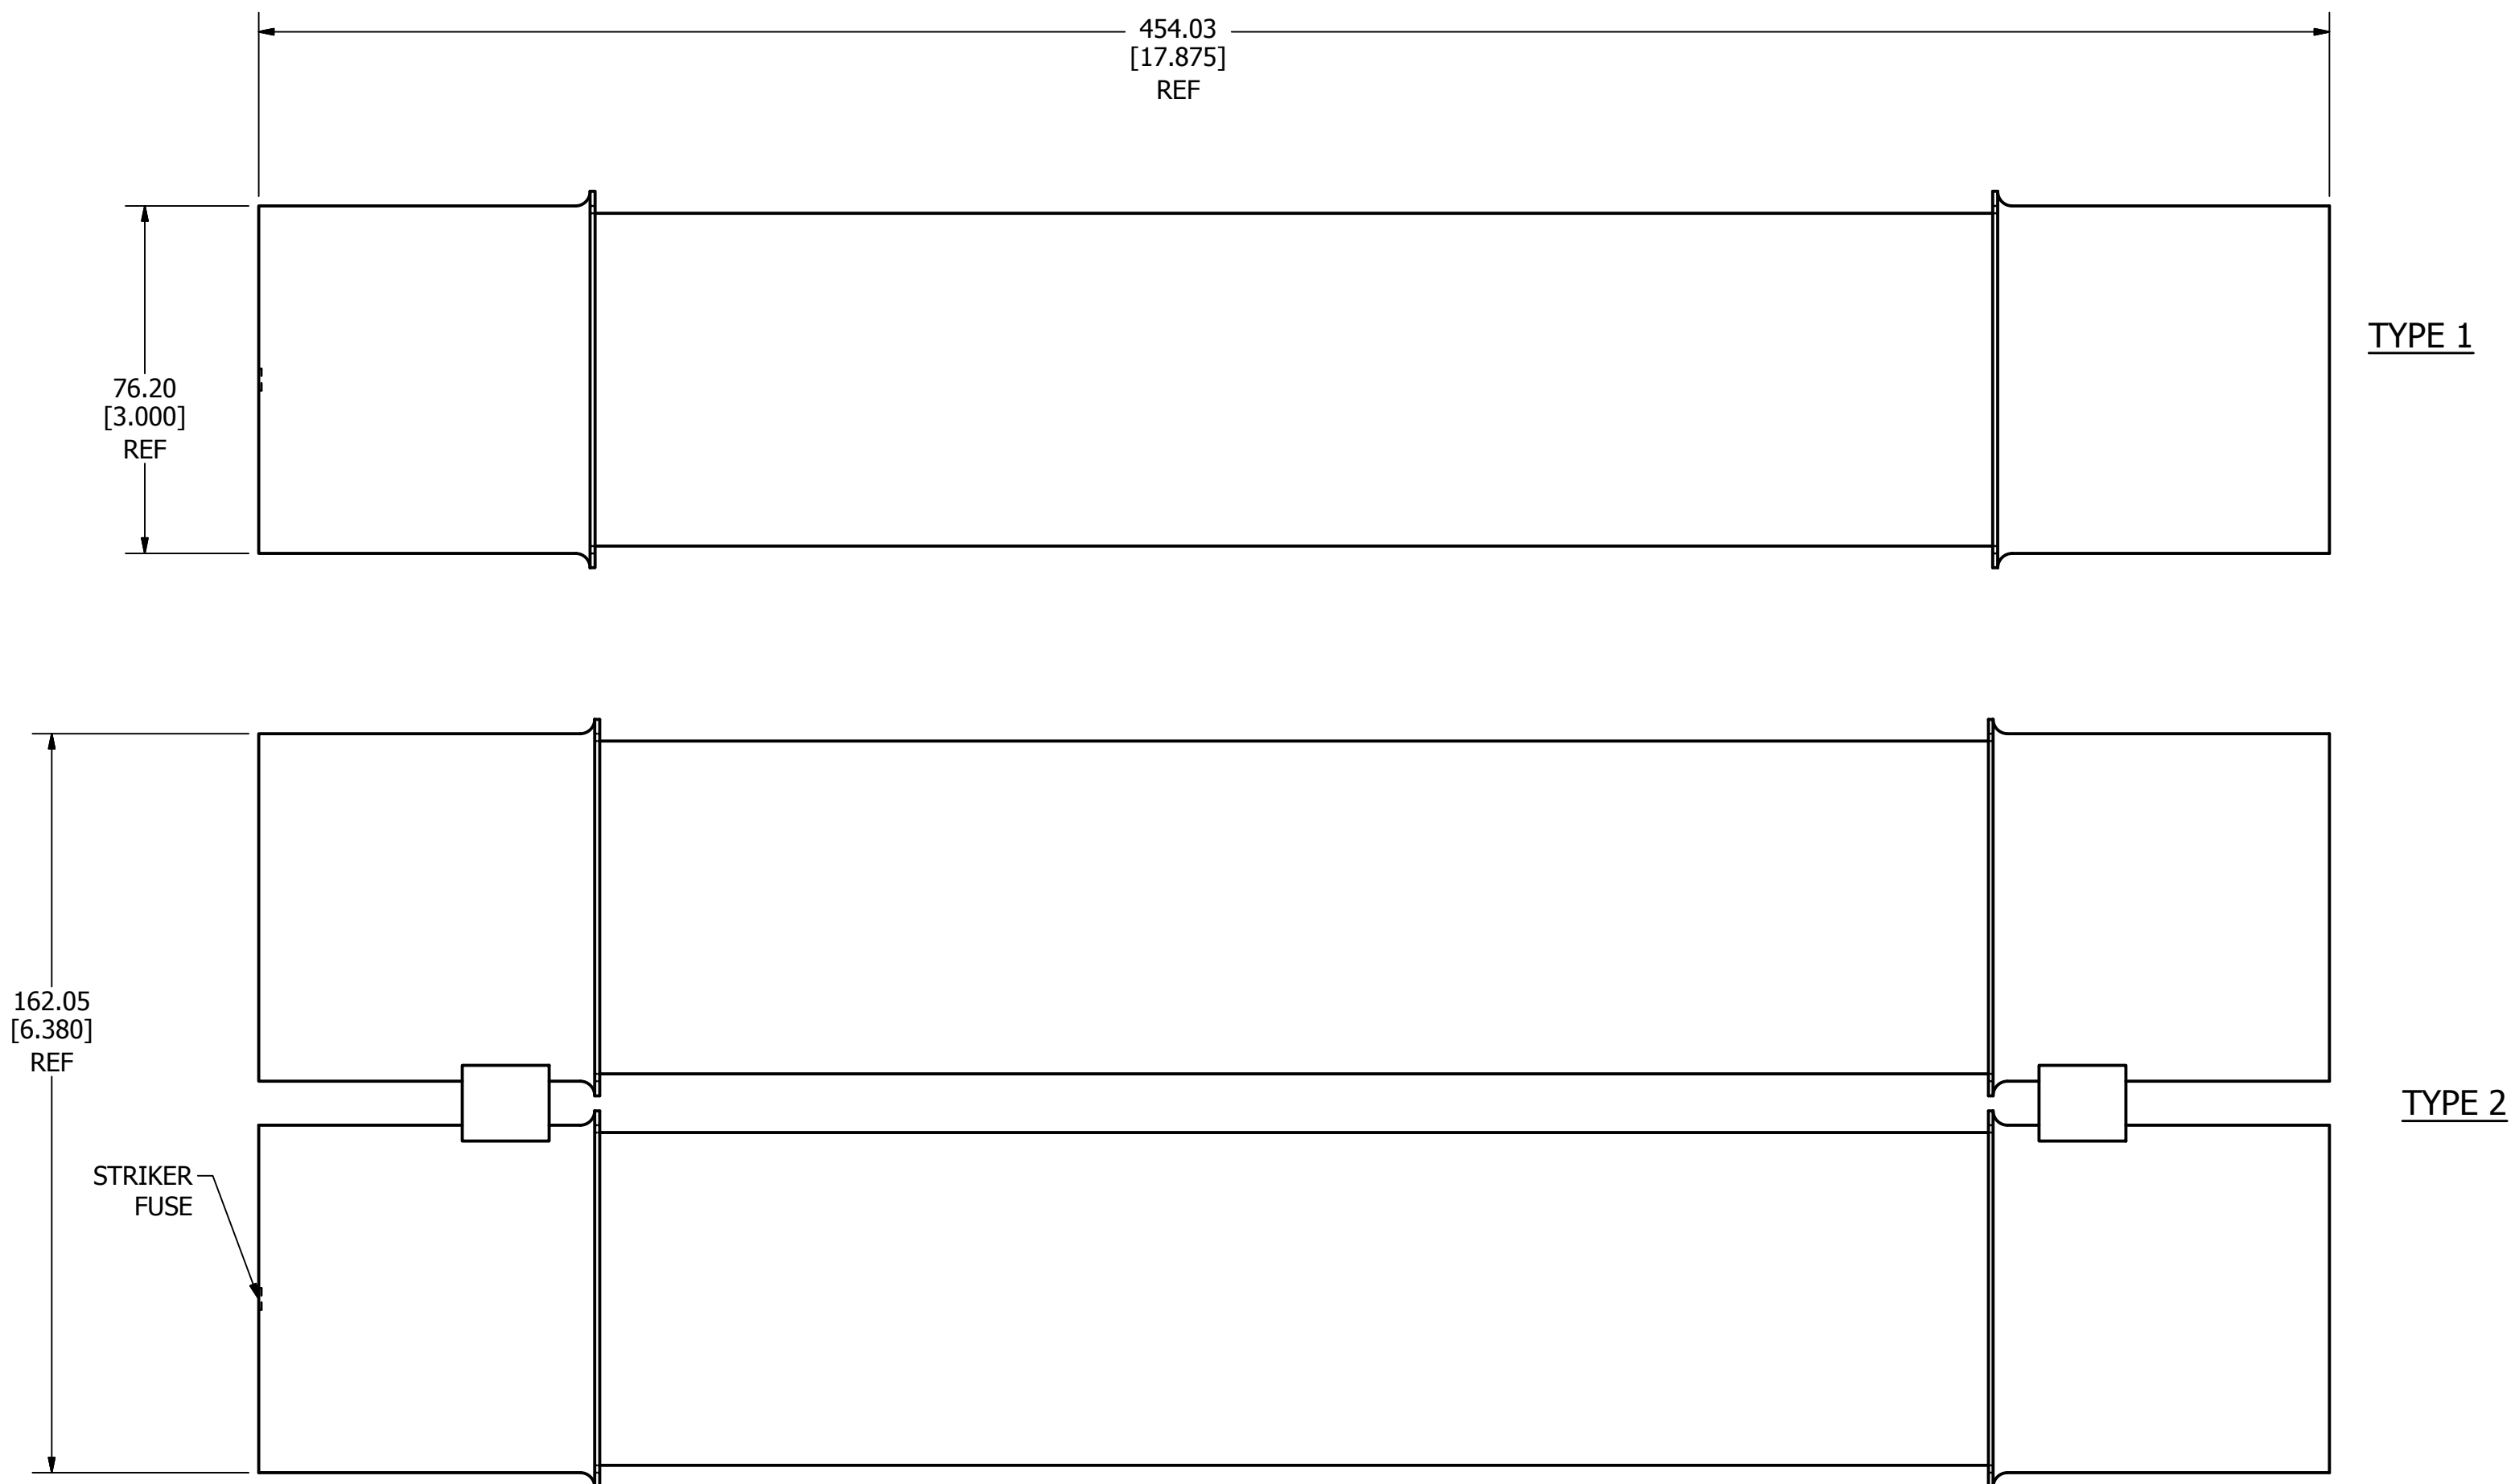

| | | | |
|---|--|------------|-------------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 450E 5.5KV OUTLINE | | | |
| | | REVISION A | DRWG NO. OL-5NLE SHEET 1 OF 1 |

| PART NO. | TYPE |
|------------|------|
| 50E1C5.5W | 1 |
| 65E1C5.5W | 1 |
| 150E1C5.5W | 1 |
| 400E2C5.5W | 2 |

| REVISION | | DESCRIPTION |
|----------|-----------|-------------------------|
| REV | DATE | |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

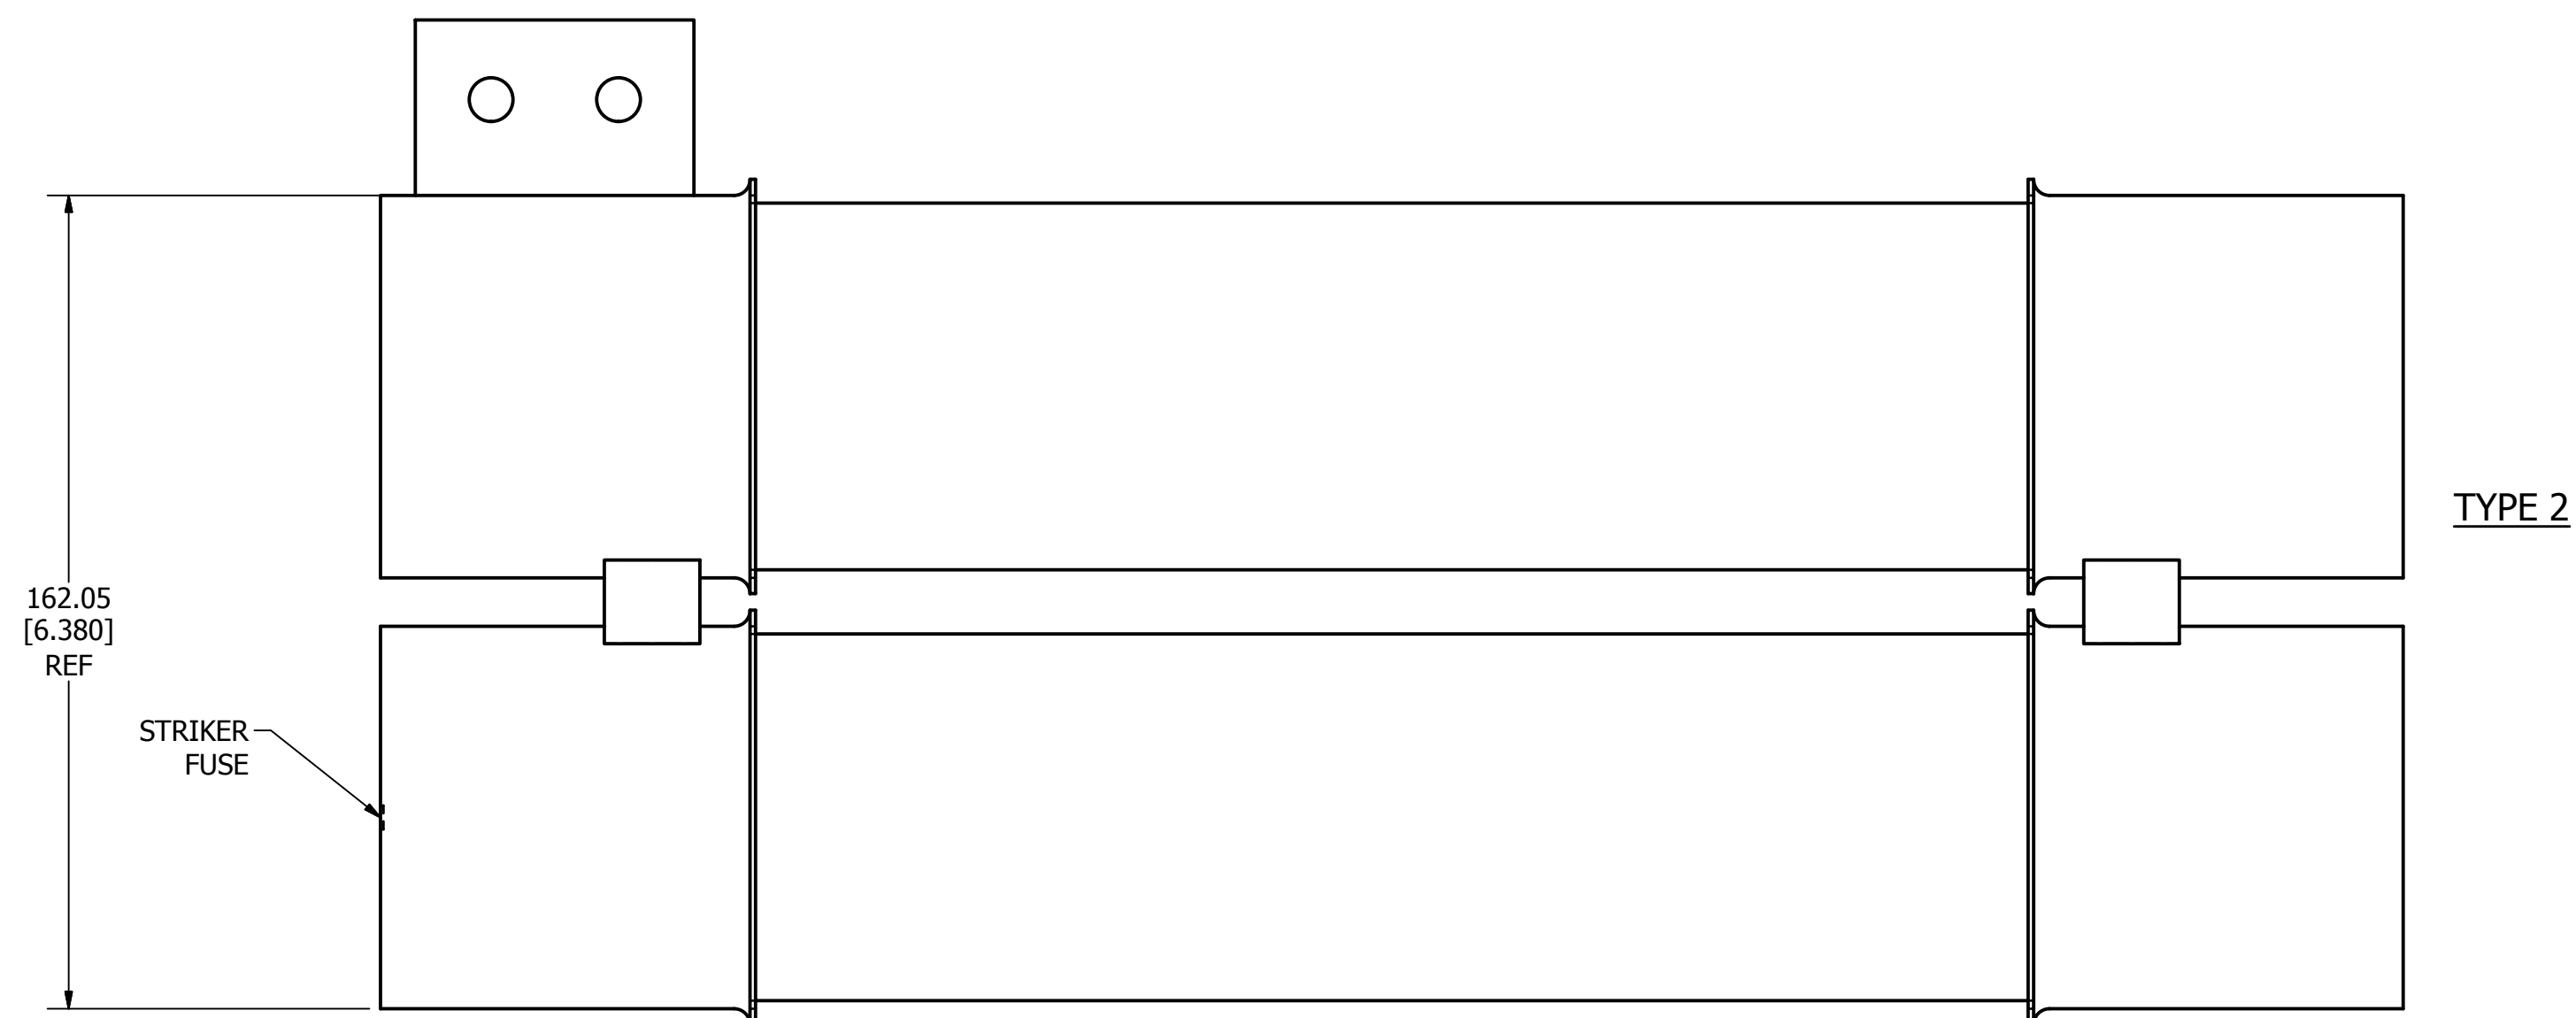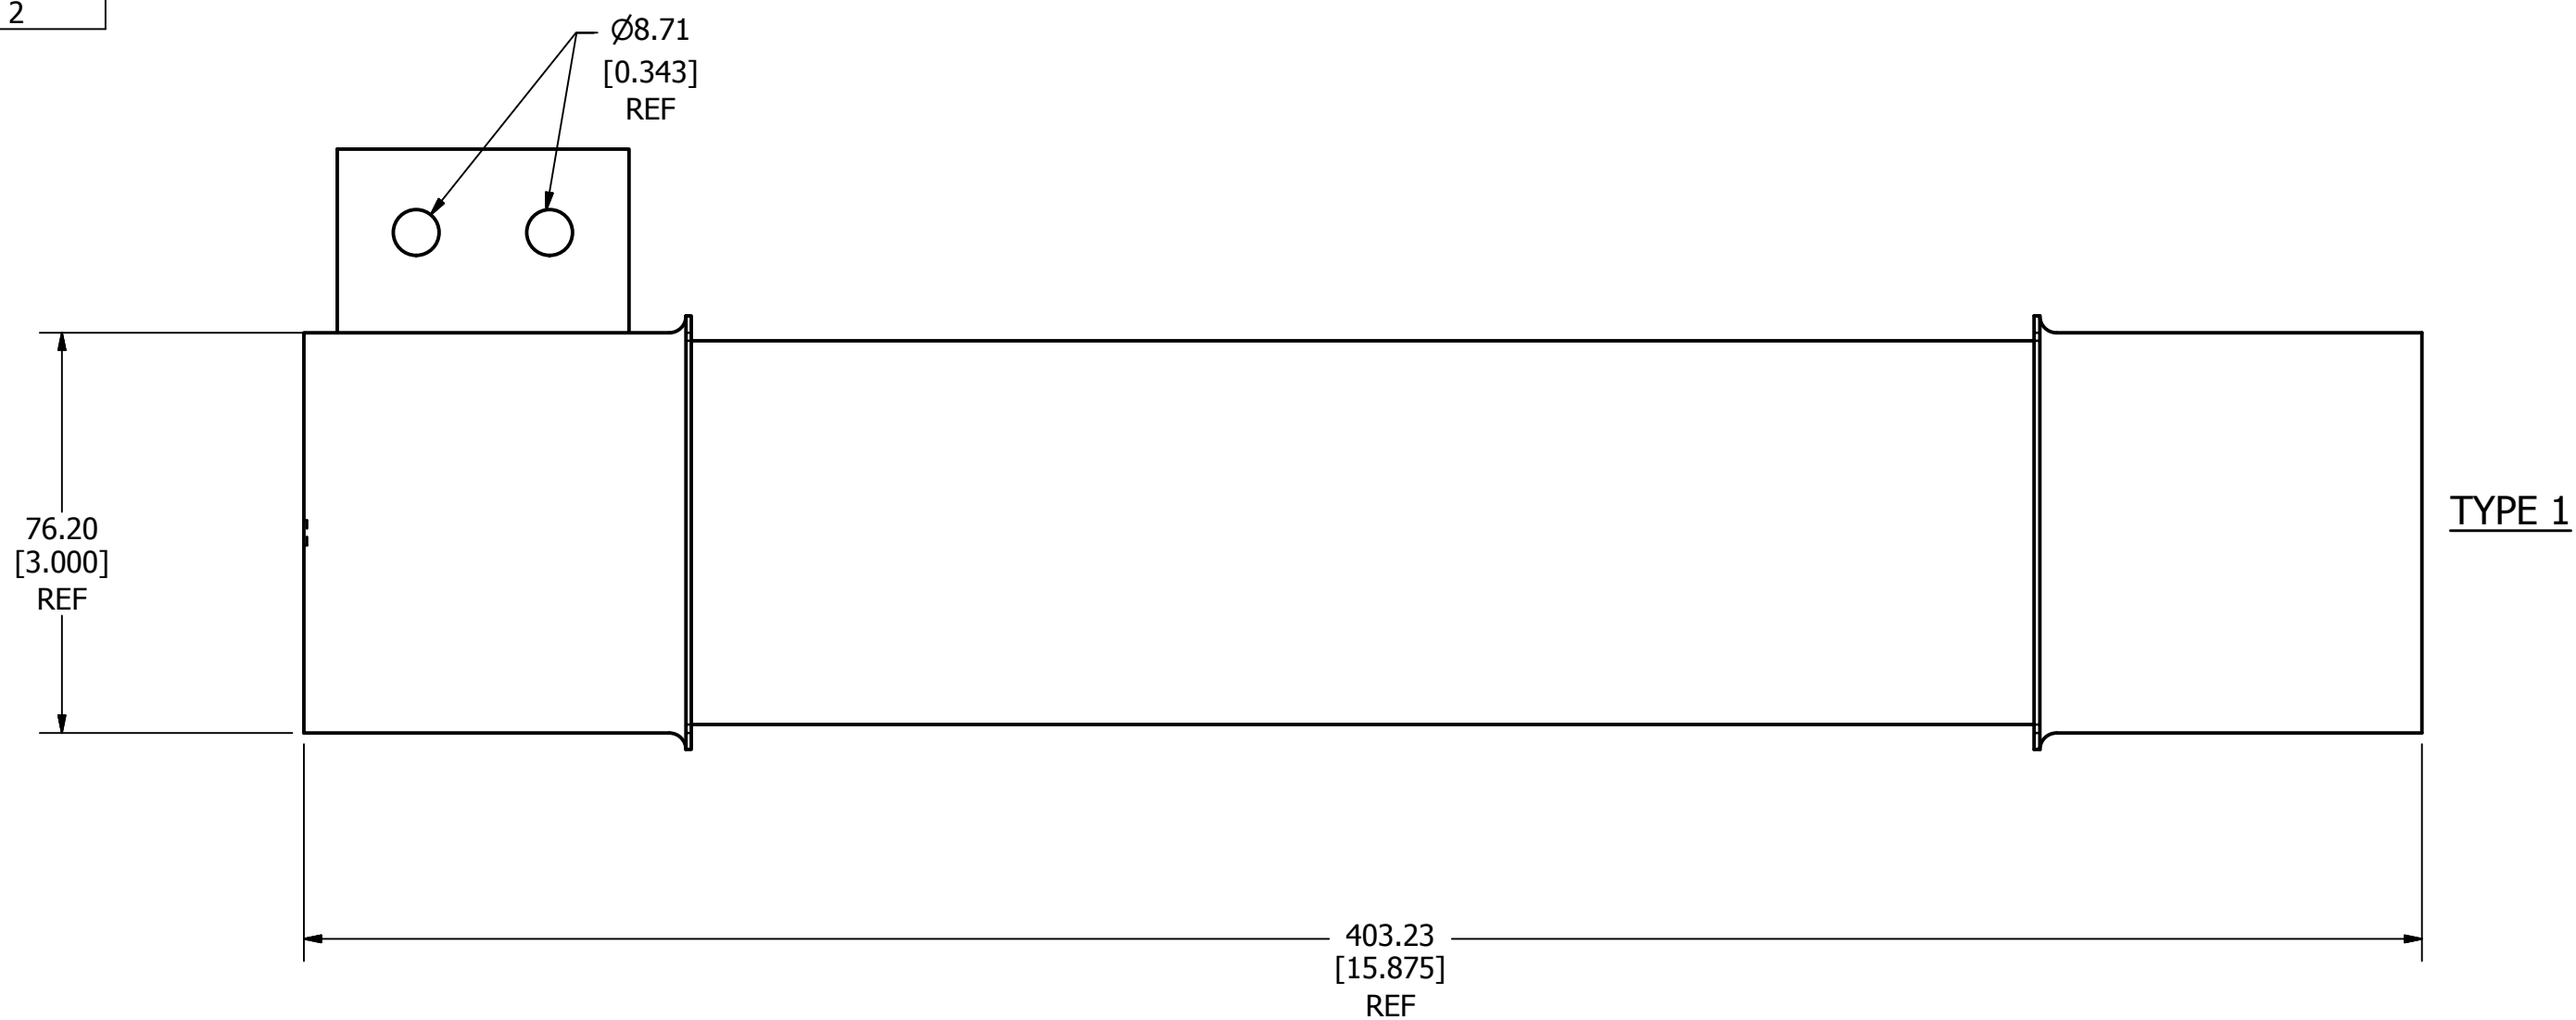

| | |
|------|--|
| ● | DENOTES CRITICAL CHARACTERISTICS. |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. |

| MATL SPEC | FINISH |
|-----------|----------------------------|
| DRW MYORK | DATE 2/18/2014 |
| SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994




| | |
|----------------------|--|
| 3RD ANGLE PROJECTION | |
|----------------------|--|

TITLE 50E THRU 400E 5.5KV W/ HOOKEYE OUTLINE

| | | | |
|-------------------------|------------|-------------------------|--------------|
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-ERATEDC5.5W | SHEET 1 OF 1 |
|-------------------------|------------|-------------------------|--------------|

| PART NO. | TYPE |
|------------|------|
| 10E1C8.25 | 1 |
| 15E1C8.25 | 1 |
| 20E1C8.25 | 1 |
| 25E1C8.25 | 1 |
| 30E1C8.25 | 1 |
| 40E1C8.25 | 1 |
| 50E1C8.25 | 1 |
| 65E1C8.25 | 1 |
| 80E1C8.25 | 1 |
| 100E1C8.25 | 1 |
| 125E1C8.25 | 1 |
| 125E2C8.25 | 2 |
| 150E1C8.25 | 1 |
| 150E2C8.25 | 2 |
| 200E2C8.25 | 2 |
| 250E2C8.25 | 2 |
| 300E2C8.25 | 2 |
| 350E3C8.25 | 3 |
| 400E3C8.25 | 3 |


| REVISION | | DESCRIPTION |
|----------|-----------|-------------------------|
| REV | DATE | |
| A | 5/28/2014 | 510492ECP - RELEASE MRY |

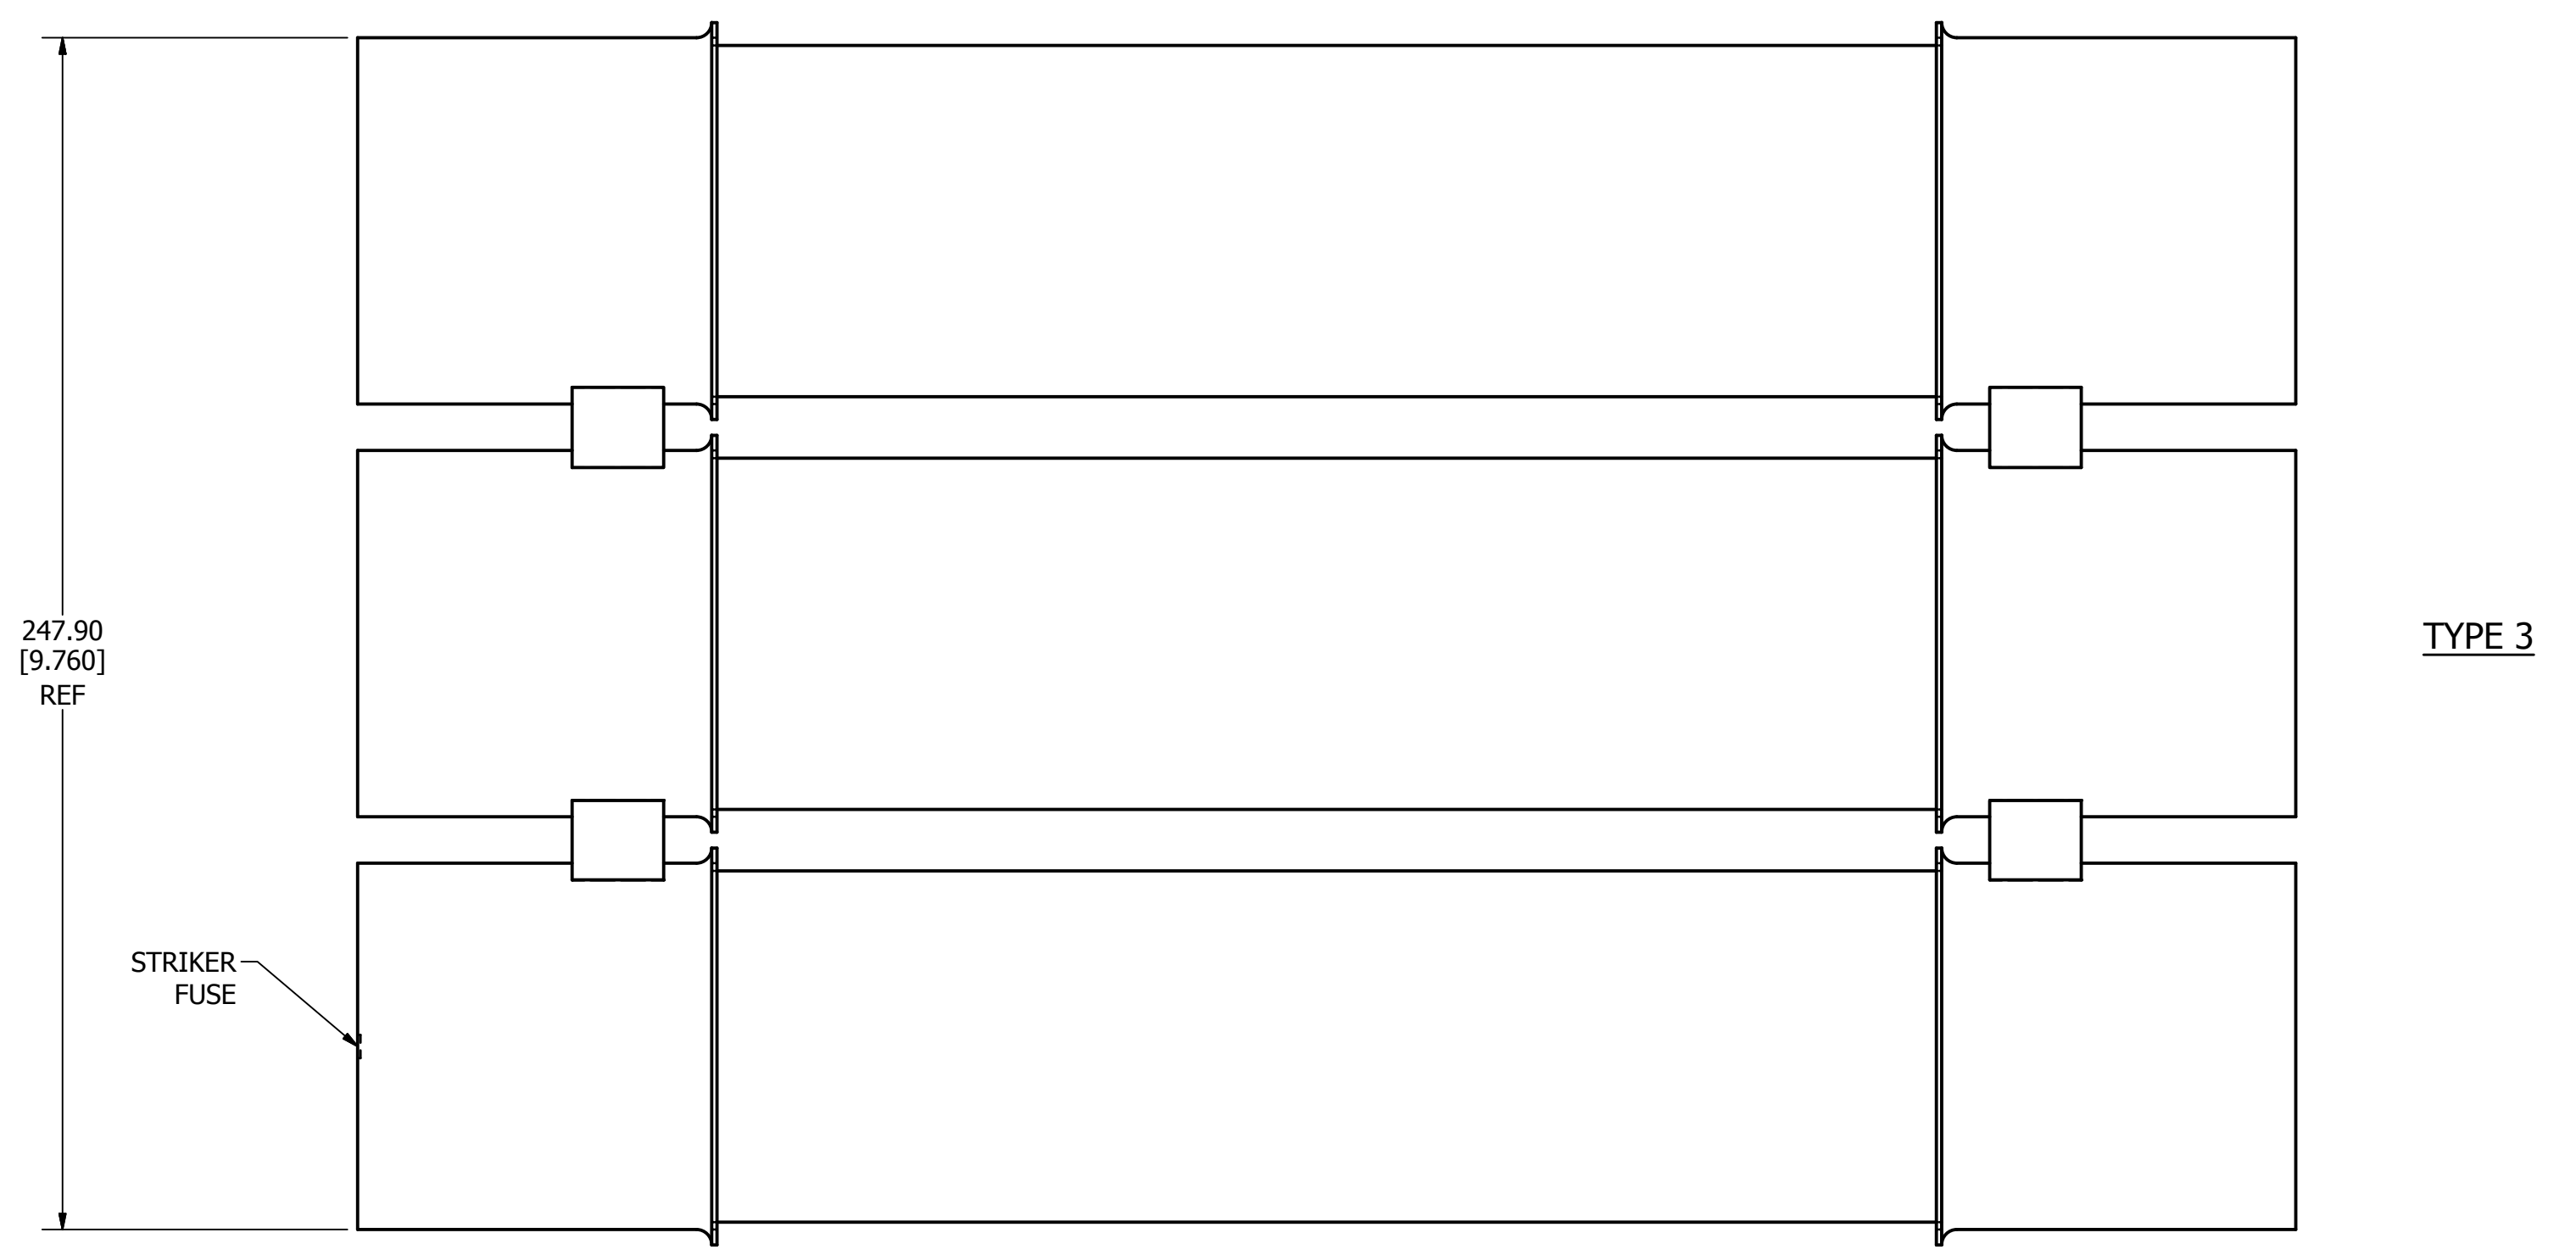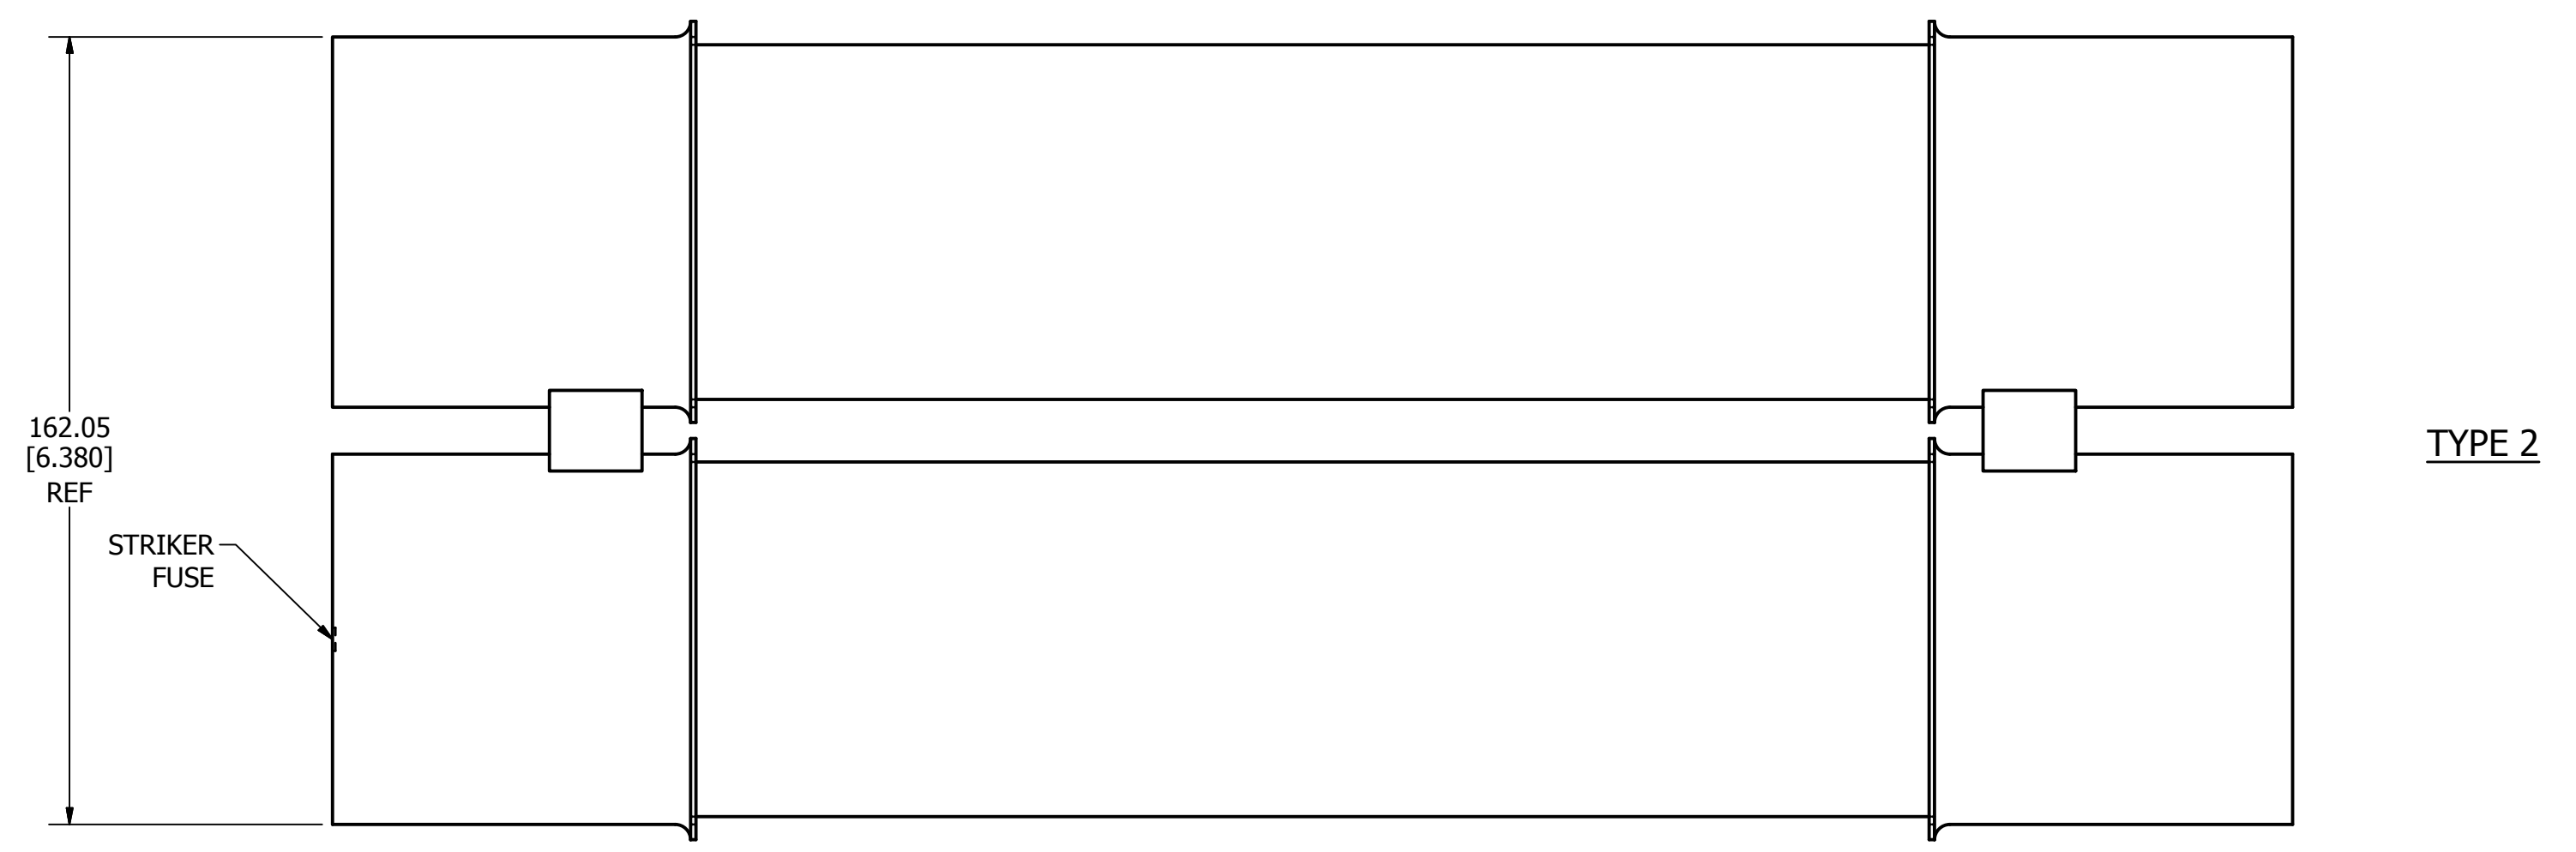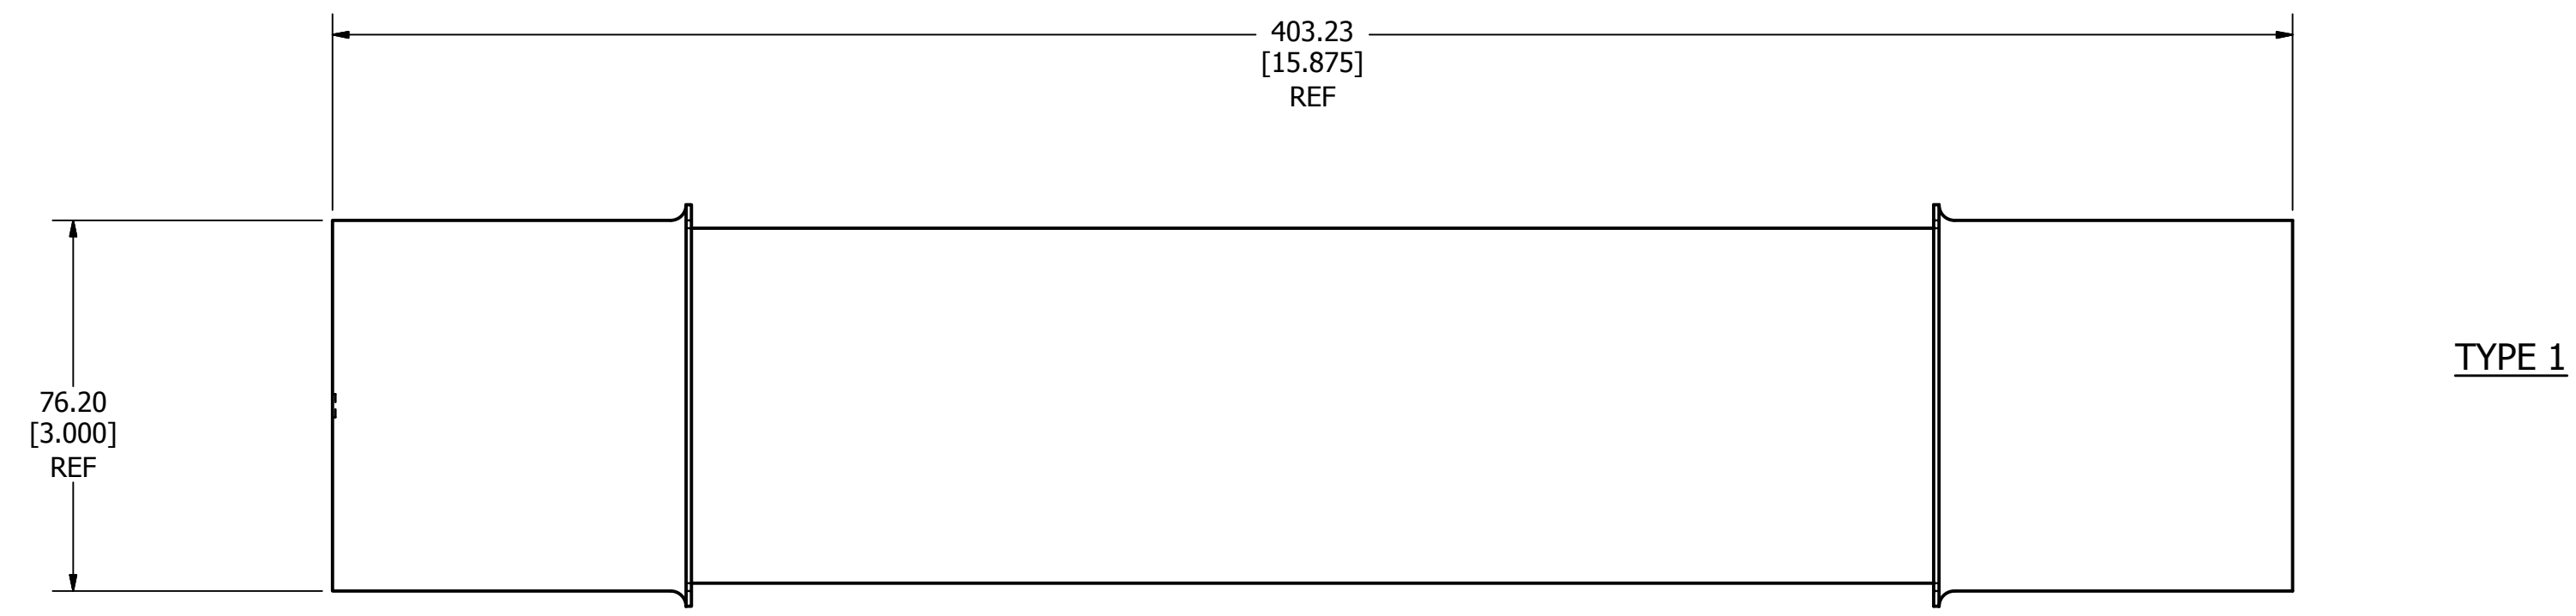


| | | | |
|---|--|-------------------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/19/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 10E THRU 400E 8.25KV OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-ERATEDC8.25 | SHEET 1 OF 1 |

| PART NO. | TYPE |
|-----------|------|
| 8NLE10E | 1 |
| 8NLE15E | 1 |
| 8NLE20E | 1 |
| 8NLE25E | 1 |
| 8NLE30E | 1 |
| 8NLE40E | 1 |
| 8NLE50E | 1 |
| 8NLE65E | 1 |
| 8NLE80E | 1 |
| 8NLE100E | 1 |
| 8NLE2100E | 2 |
| 8NLE2125E | 2 |
| 8NLE150E | 1 |
| 8NLE2150E | 2 |
| 8NLE2200E | 2 |
| 8NLE2250E | 2 |

| REVISION | | DESCRIPTION | MRY |
|----------|-----------|---------------------|-----|
| REV | DATE | | |
| A | 5/28/2014 | 510492GCP - RELEASE | |

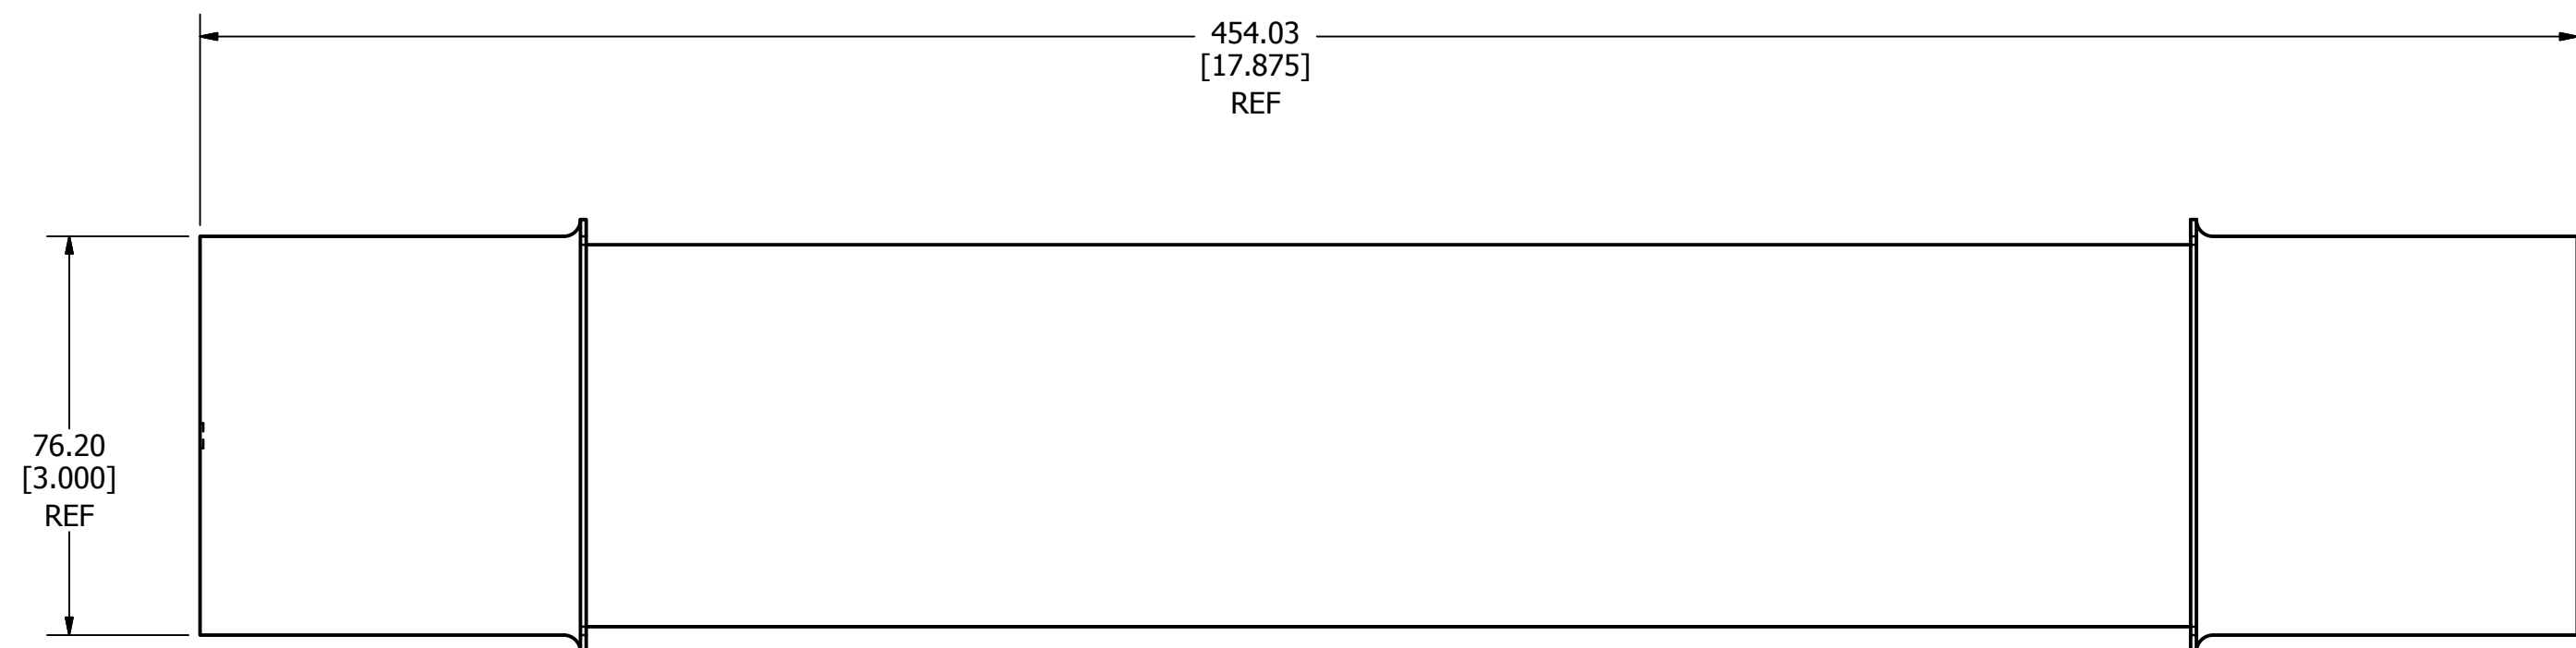

TYPE 1

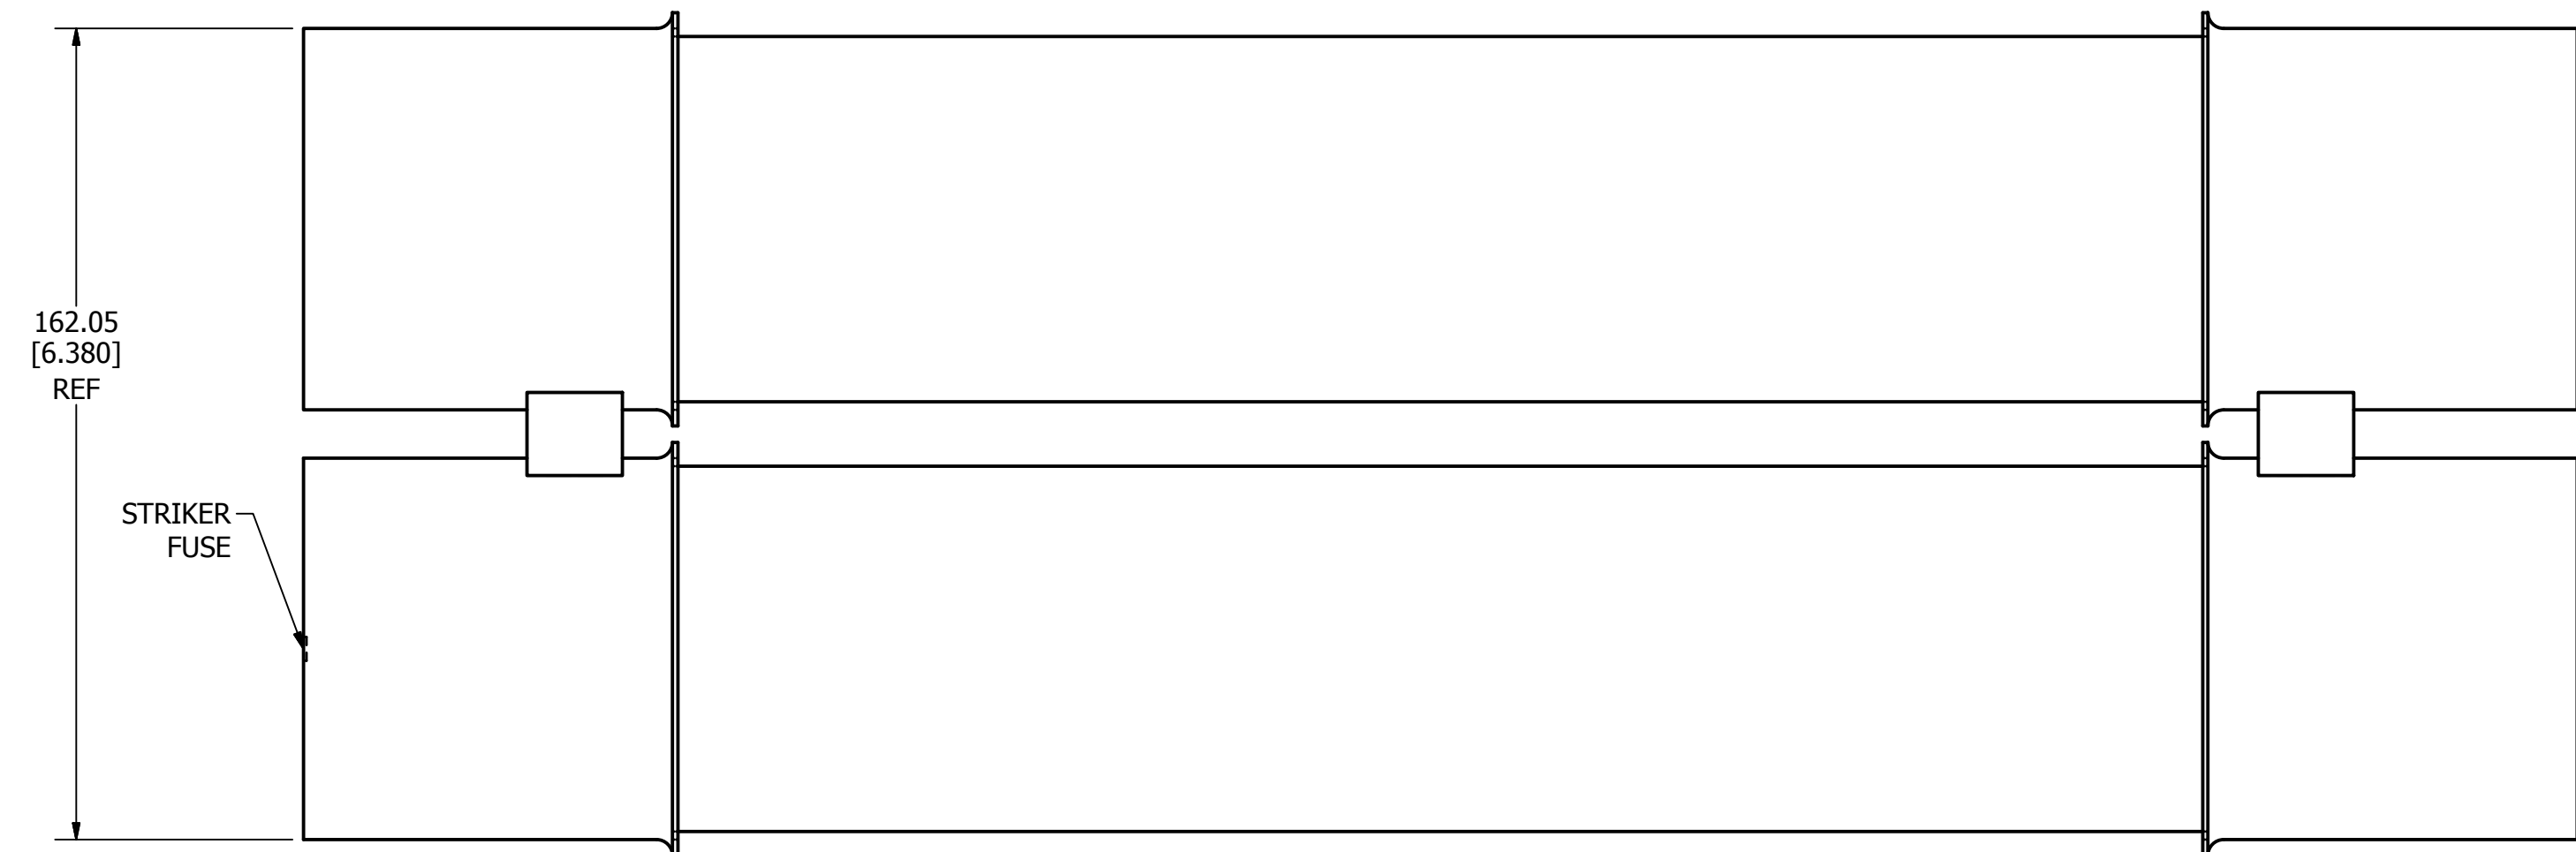


TYPE 2


| | | | |
|---|--|------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/19/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 250E 8.25KV OUTLINE | | | |
| CHICAGO, ILLINOIS 60631 | | REVISION A | DRWG NO. OL-8NLE |
| SHEET 1 OF 1 | | | |

| PART NO. | TYPE |
|------------|------|
| 10E1C15.5 | 1 |
| 15E1C15.5 | 1 |
| 20E1C15.5 | 1 |
| 25E1C15.5 | 1 |
| 30E1C15.5 | 1 |
| 40E1C15.5 | 1 |
| 50E1C15.5 | 1 |
| 65E1C15.5 | 1 |
| 65E2C15.5 | 2 |
| 80E1C15.5 | 1 |
| 80E2C15.5 | 2 |
| 100E1C15.5 | 1 |
| 100E2C15.5 | 2 |
| 125E2C15.5 | 2 |
| 150E2C15.5 | 2 |
| 175E2C15.5 | 2 |
| 200E2C15.5 | 2 |
| 200E3C15.5 | 3 |
| 250E3C15.5 | 3 |
| 300E3C15.5 | 3 |

| REV | DATE | REVISION | DESCRIPTION |
|-----|-----------|----------|-------------------------|
| A | 5/28/2014 | | 510492GCP - RELEASE MRY |

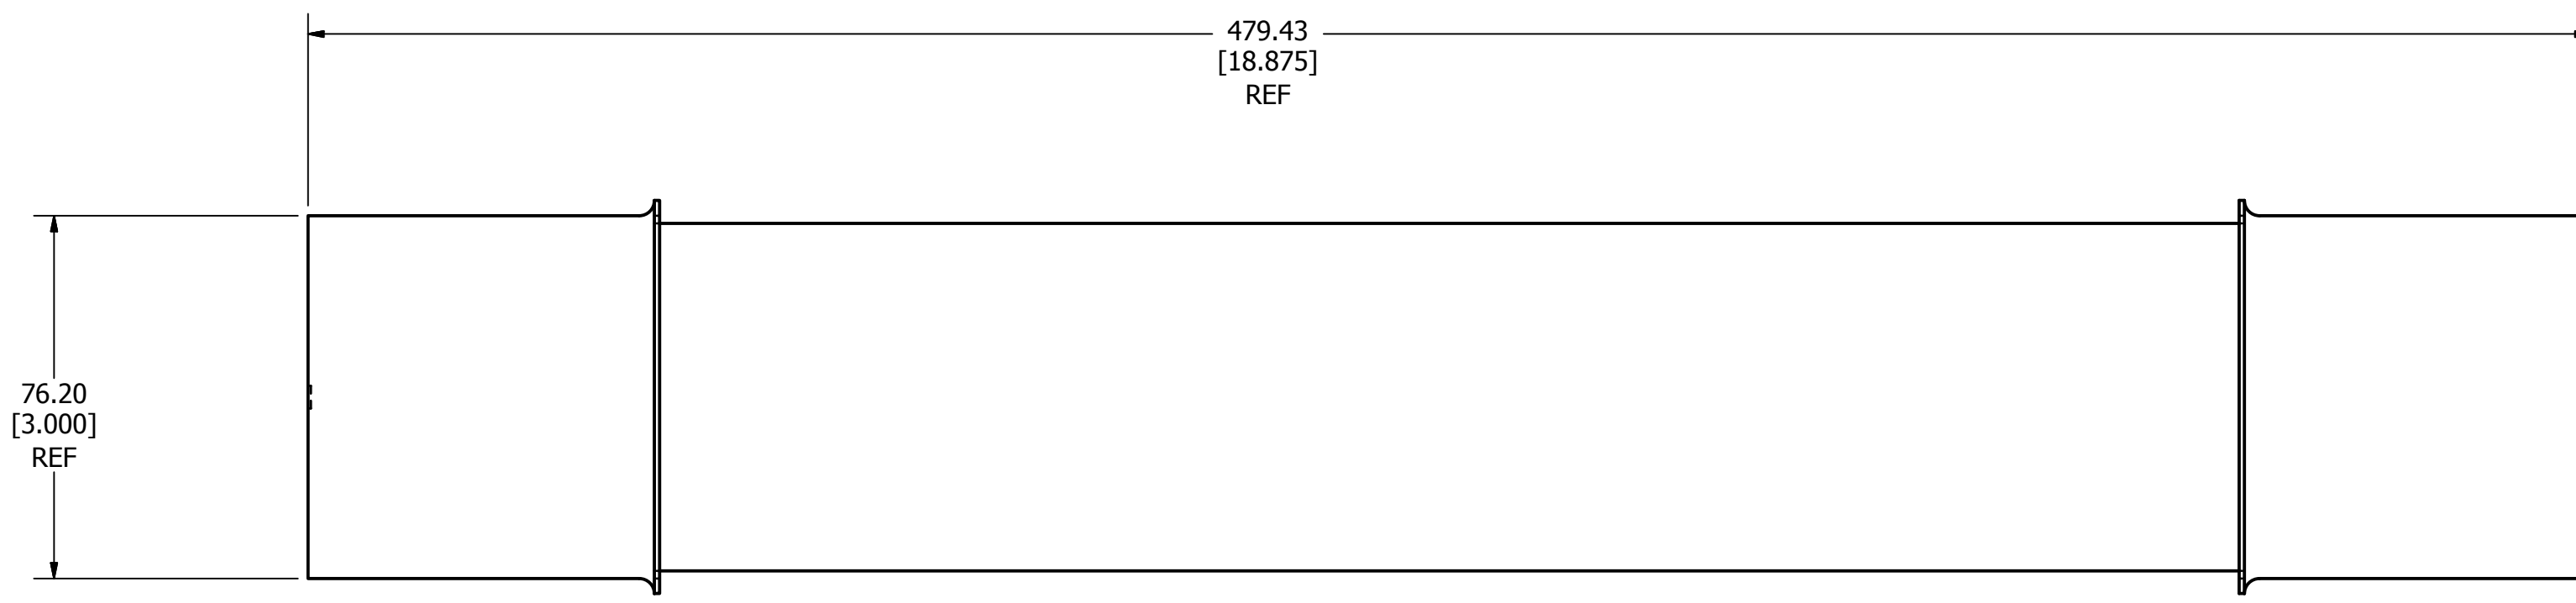

TYPE 1

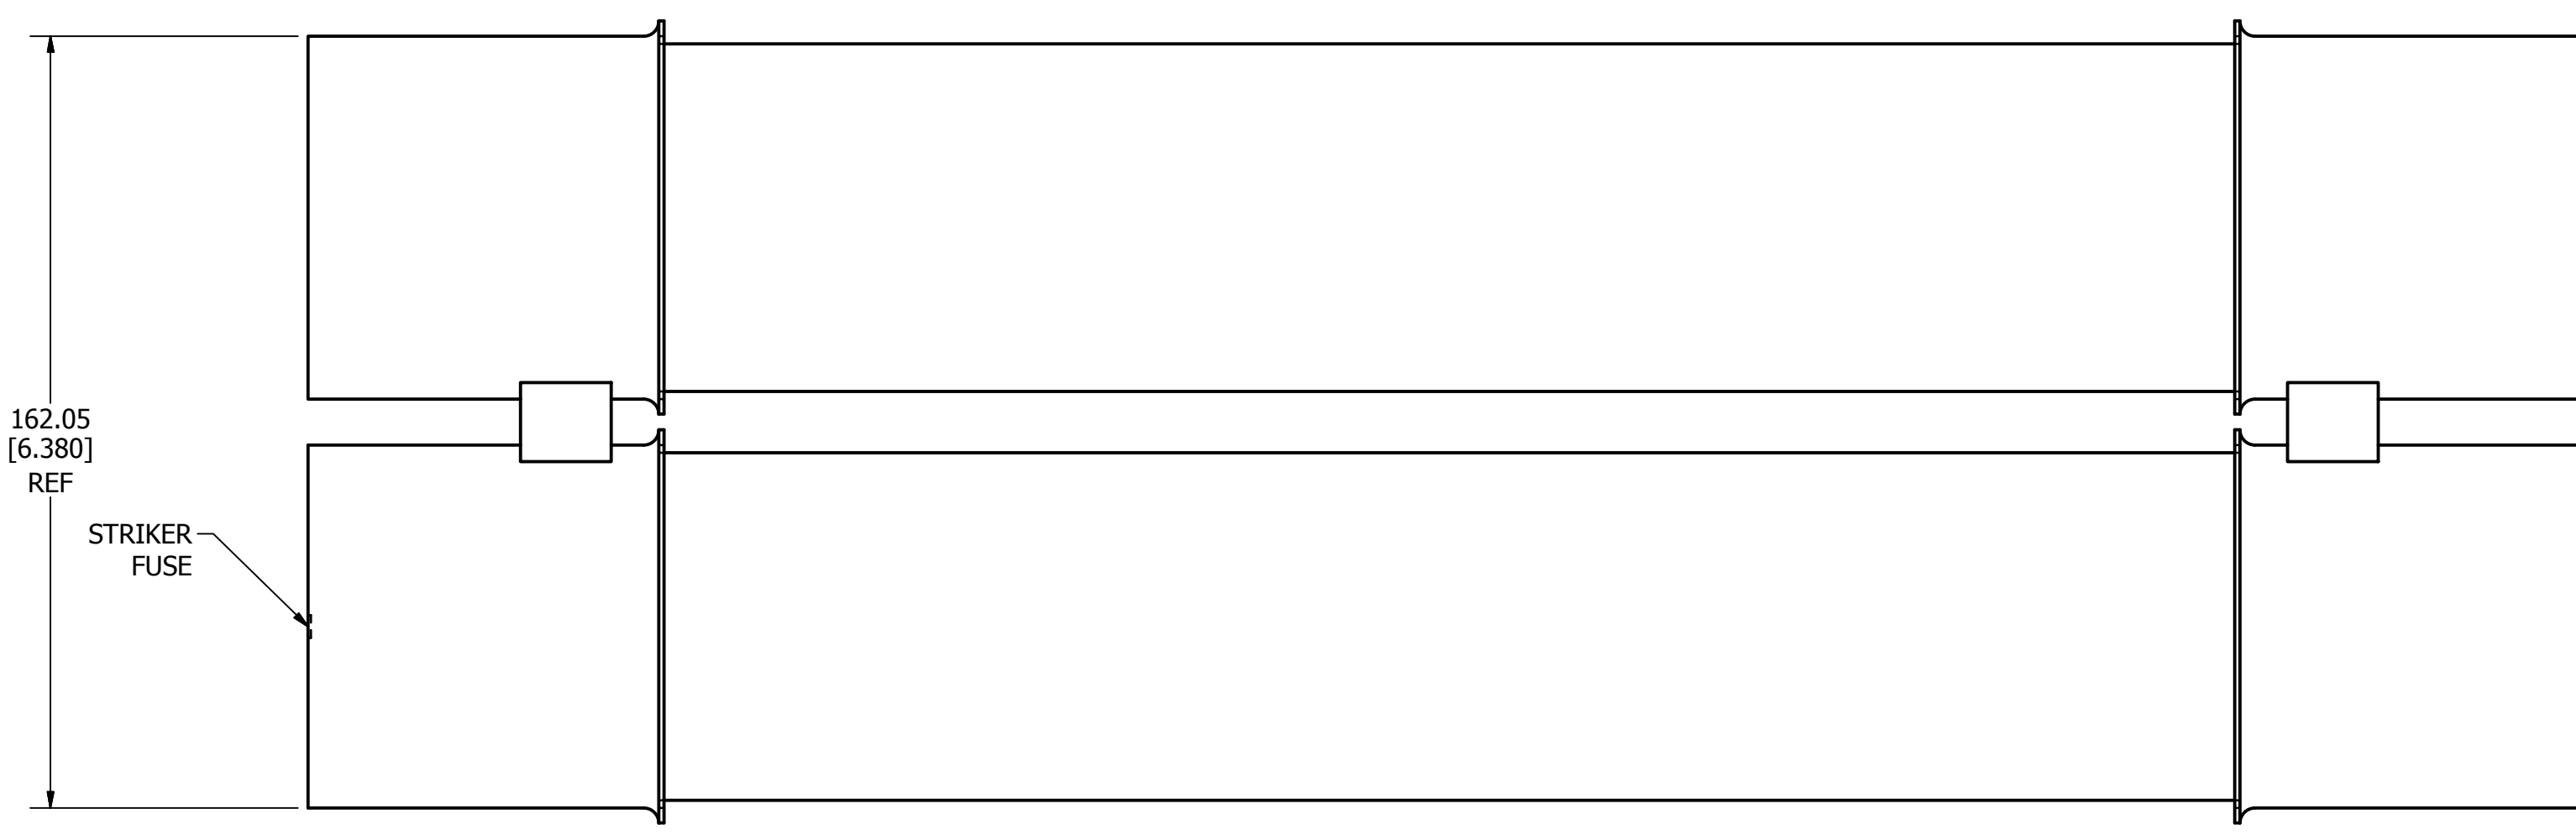

TYPE 2




TYPE 3


| | | | |
|---|--|------------|--------------------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 300E 15.5KV OUTLINE | | | |
| | | REVISION A | DRWG NO. OL-ERATEDC15.5 SHEET 1 OF 1 |

| PART NO. | TYPE |
|------------|------|
| 15GSE65E | 1 |
| 15GSE80E | 1 |
| 15GSE100E | 1 |
| 15GSE2125E | 2 |
| 15GSE2150E | 2 |
| 15GSE2175E | 2 |
| 15GSE2200E | 2 |
| 15GSE3250E | 3 |
| 15GSE3300E | 3 |


| REVISION | | DESCRIPTION | MRY |
|----------|-----------|---------------------|-----|
| REV | DATE | | |
| A | 5/28/2014 | 510492GCP - RELEASE | |

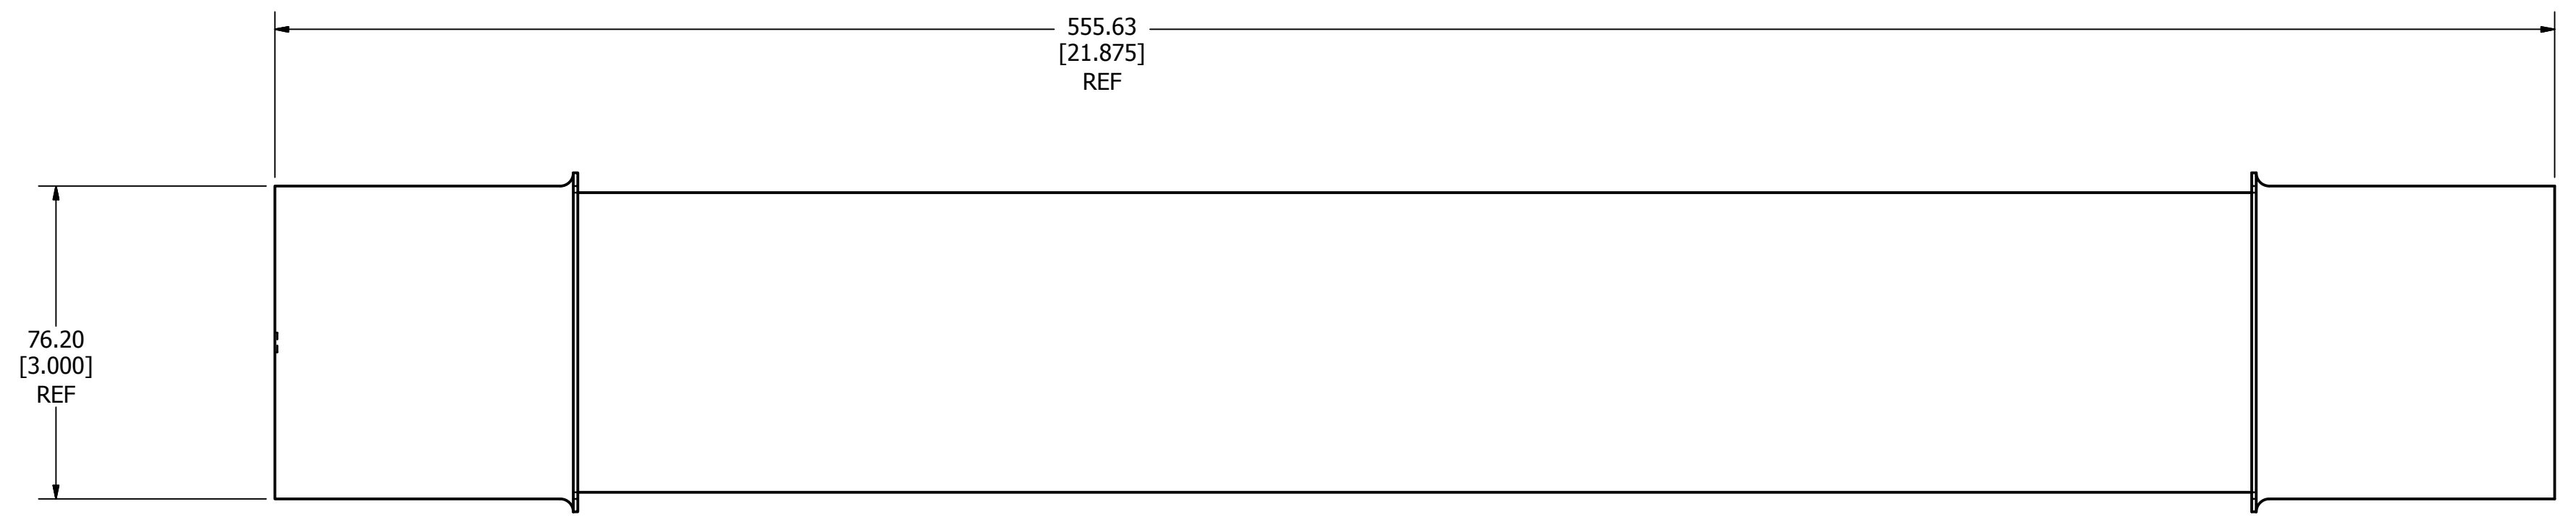

TYPE 1

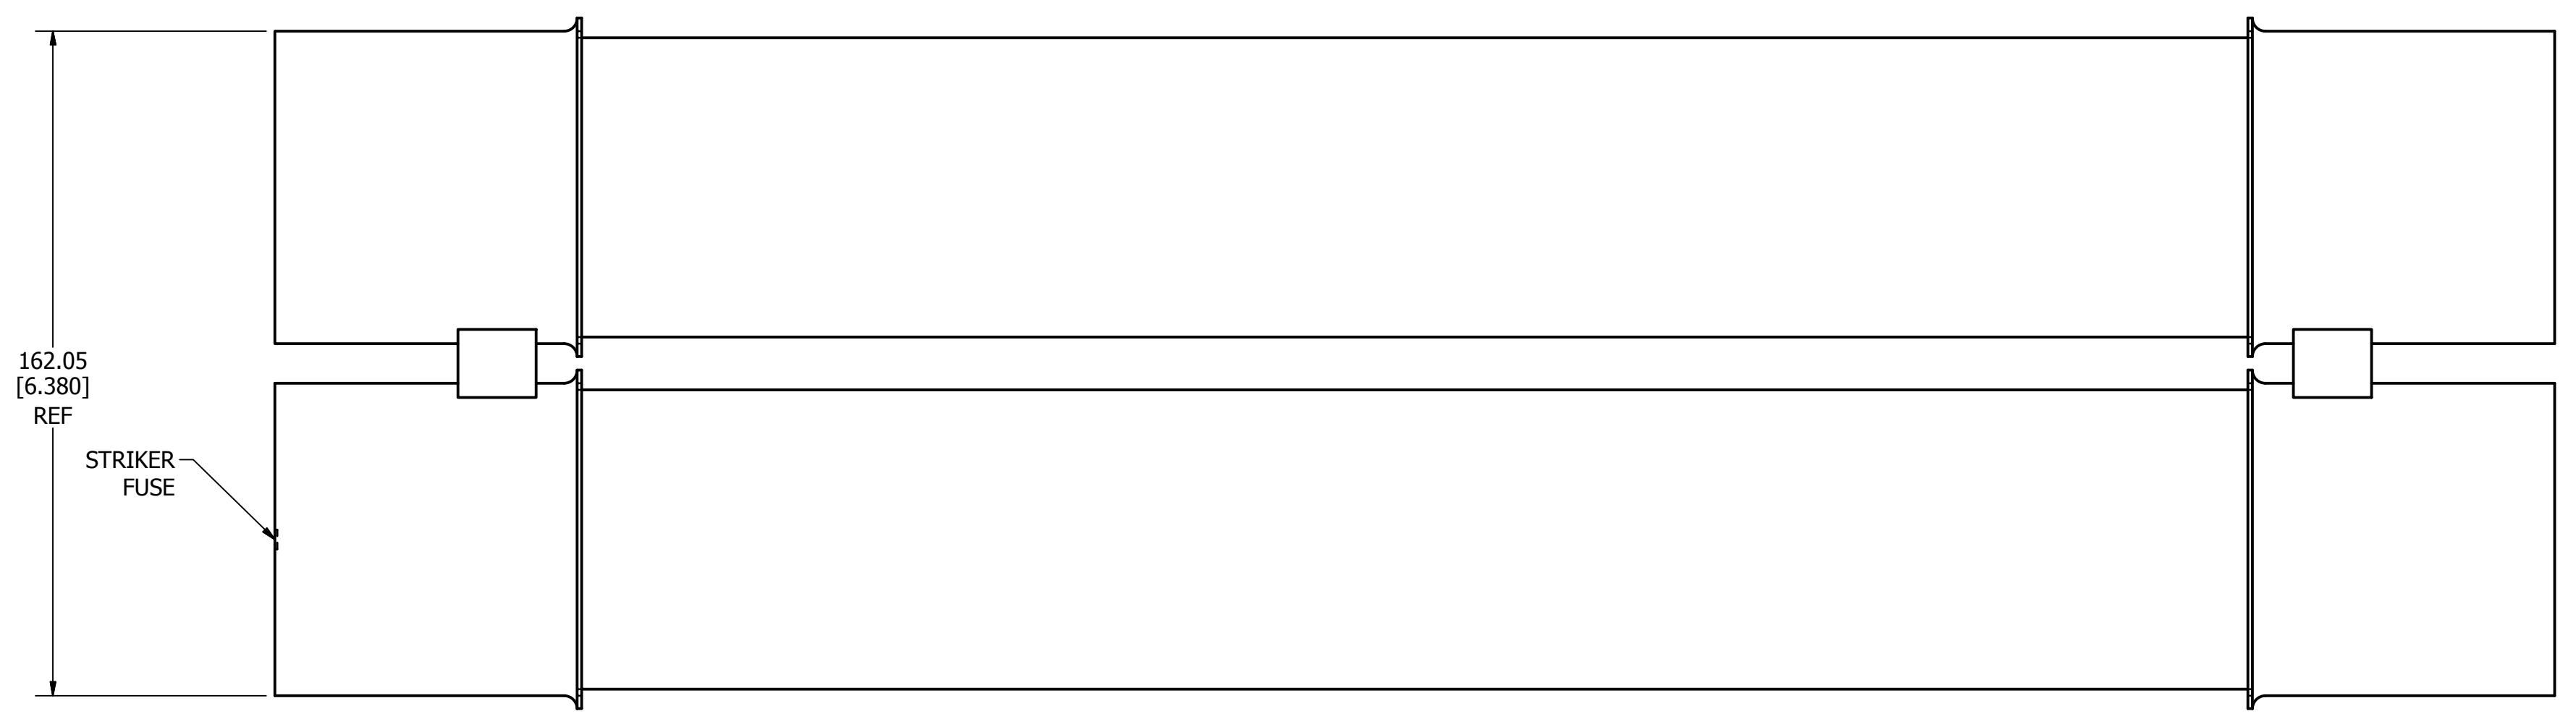

TYPE 2

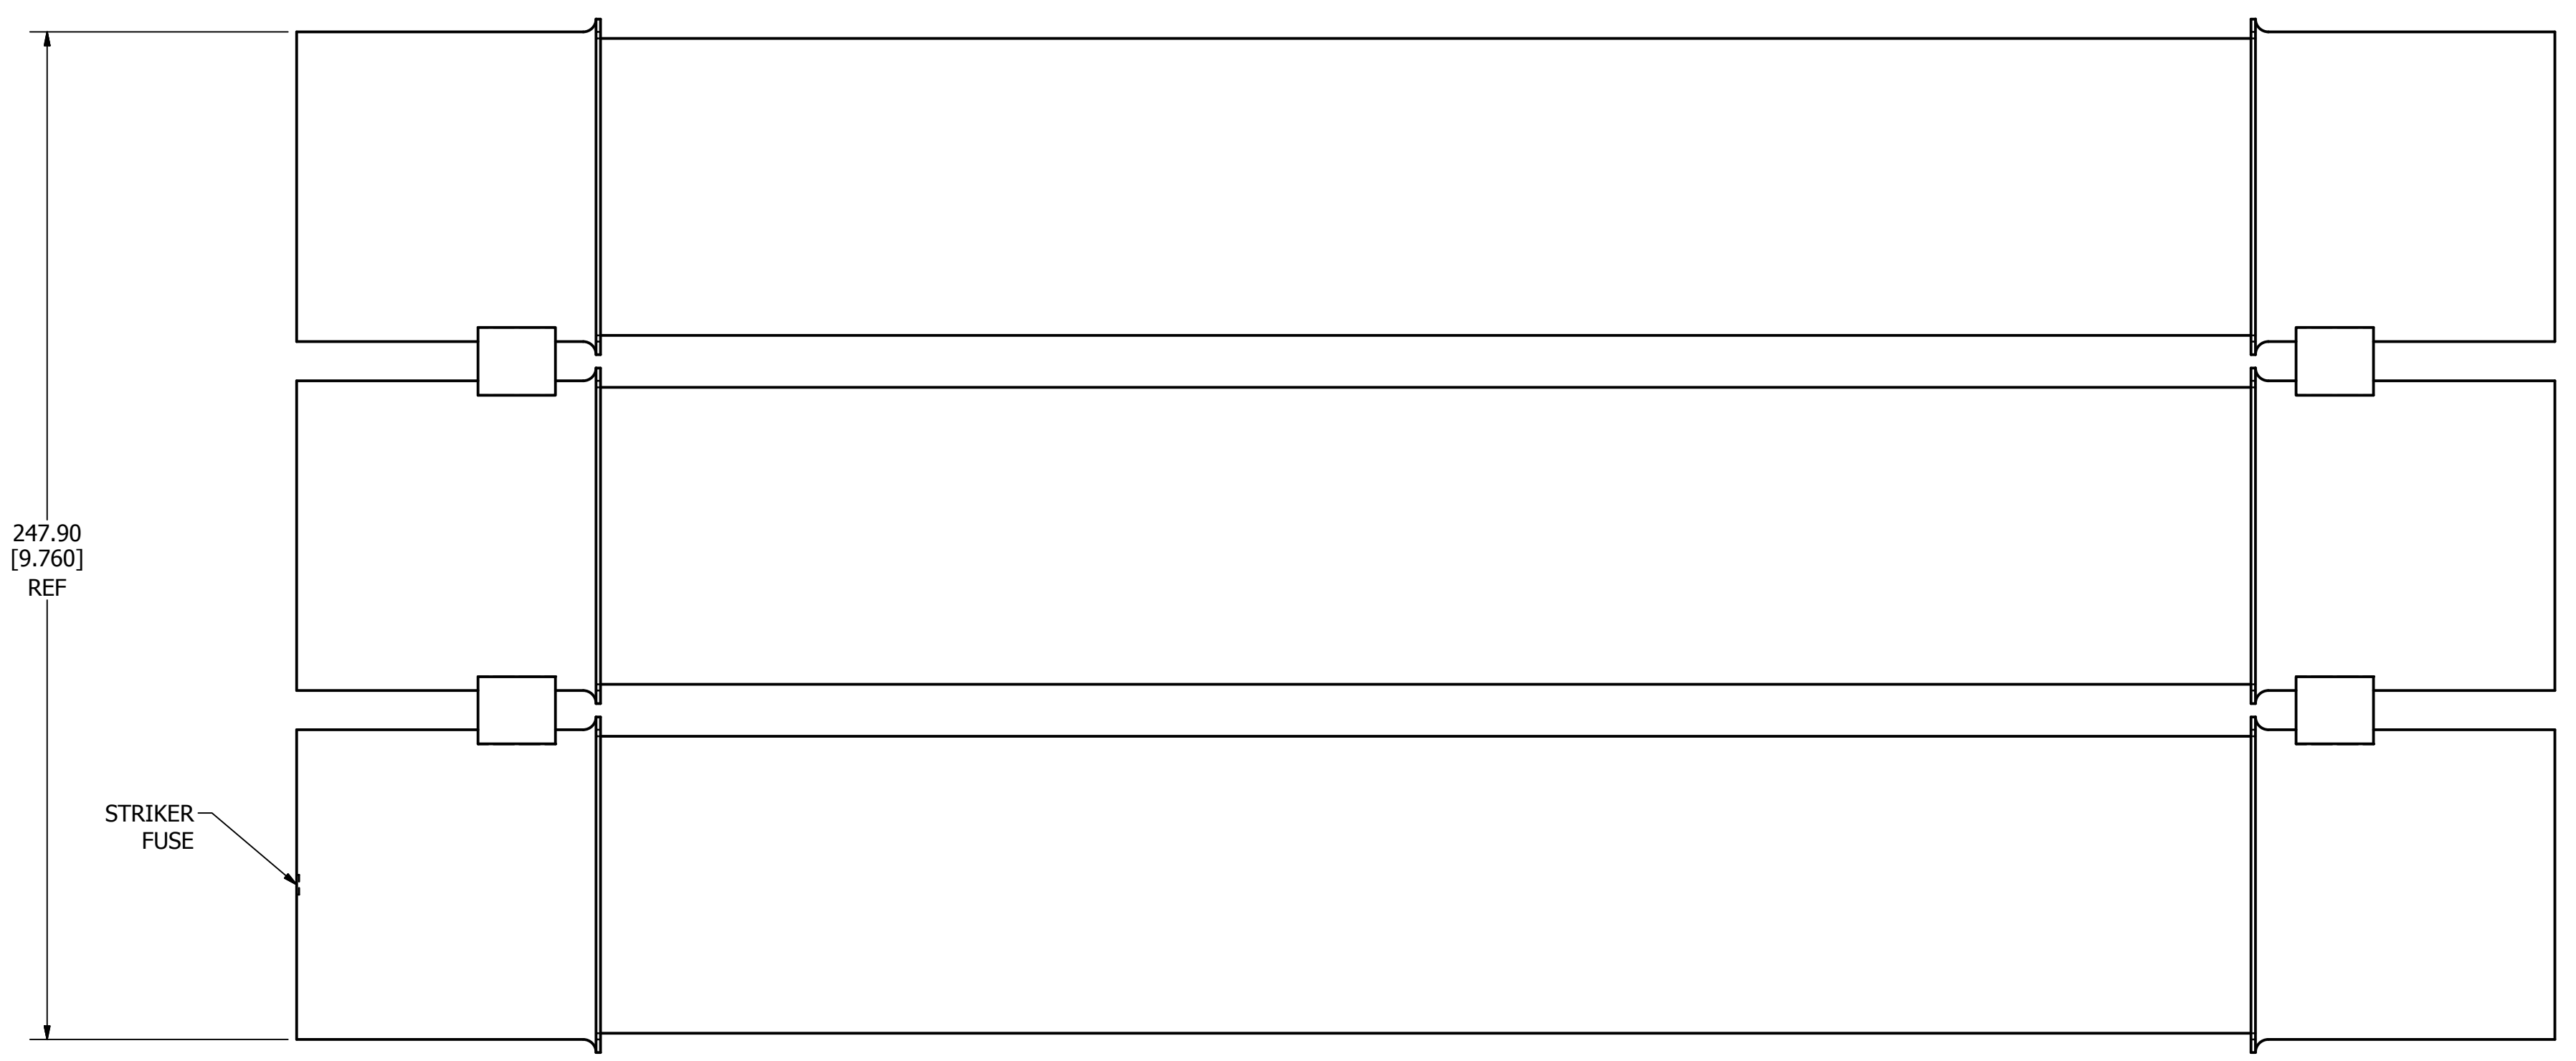


TYPE 3


| | | | |
|---|--|-------------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 65E THRU 300E 15.5KV OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-15GSE | SHEET 1 OF 1 |

| PART NO. | TYPE |
|------------|------|
| 15NLE10E | 1 |
| 15NLE15E | 1 |
| 15NLE20E | 1 |
| 15NLE25E | 1 |
| 15NLE30E | 1 |
| 15NLE40E | 1 |
| 15NLE50E | 1 |
| 15NLE65E | 1 |
| 15NLE80E | 1 |
| 15NLE280E | 2 |
| 15NLE100E | 1 |
| 15NLE2100E | 2 |
| 15NLE2125E | 2 |
| 15NLE2150E | 2 |
| 15NLE3150E | 3 |
| 15NLE2175E | 2 |
| 15NLE3175E | 3 |
| 15NLE2200E | 2 |
| 15NLE3250E | 3 |
| 15NLE3300E | 3 |


| REV | DATE | DESCRIPTION | REVISION |
|-----|-----------|---------------------|----------|
| A | 5/28/2014 | 510492GCP - RELEASE | MRY |

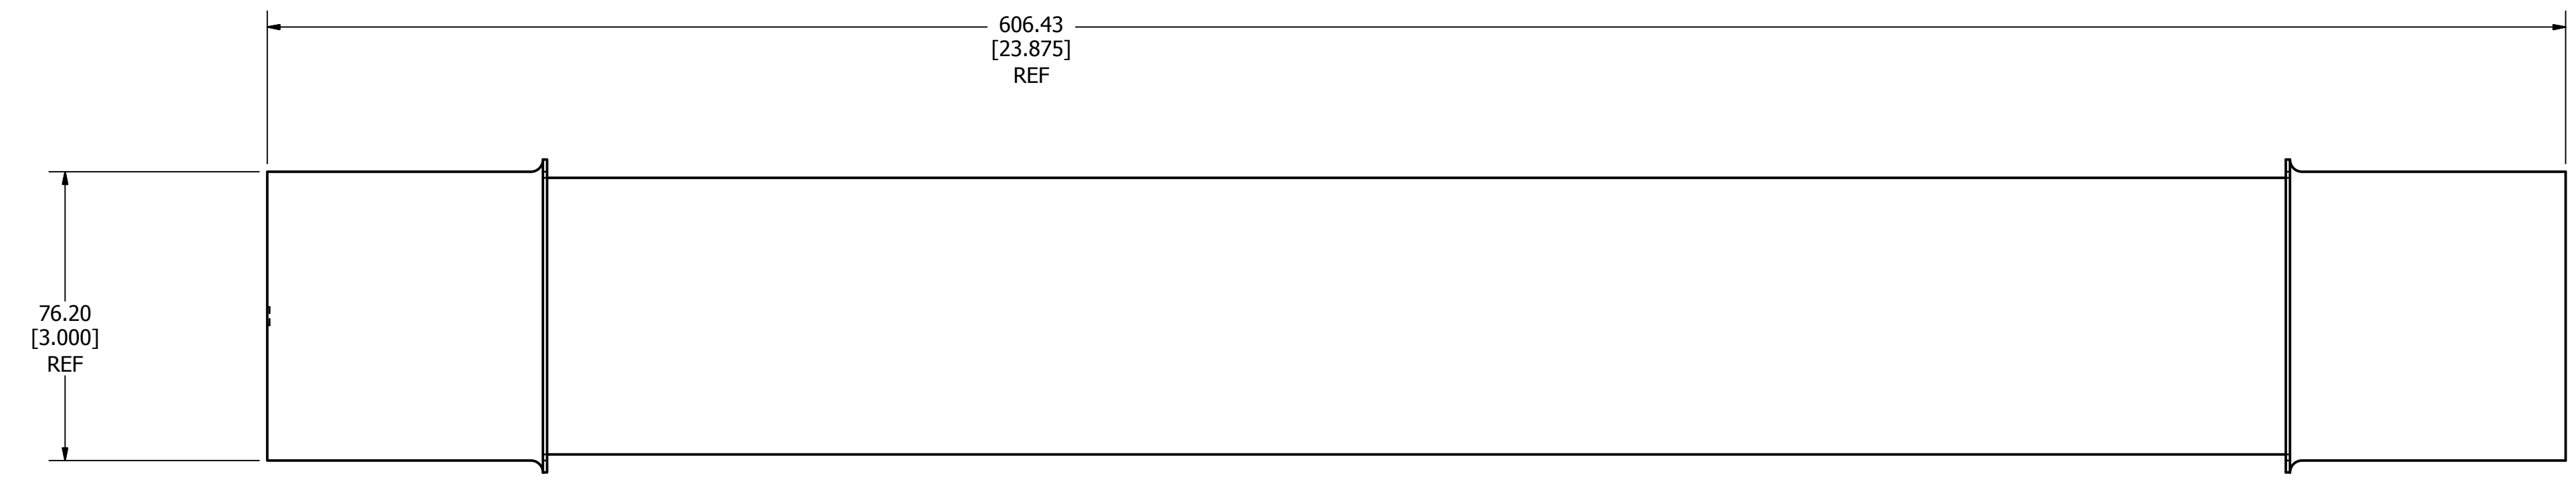

TYPE 1

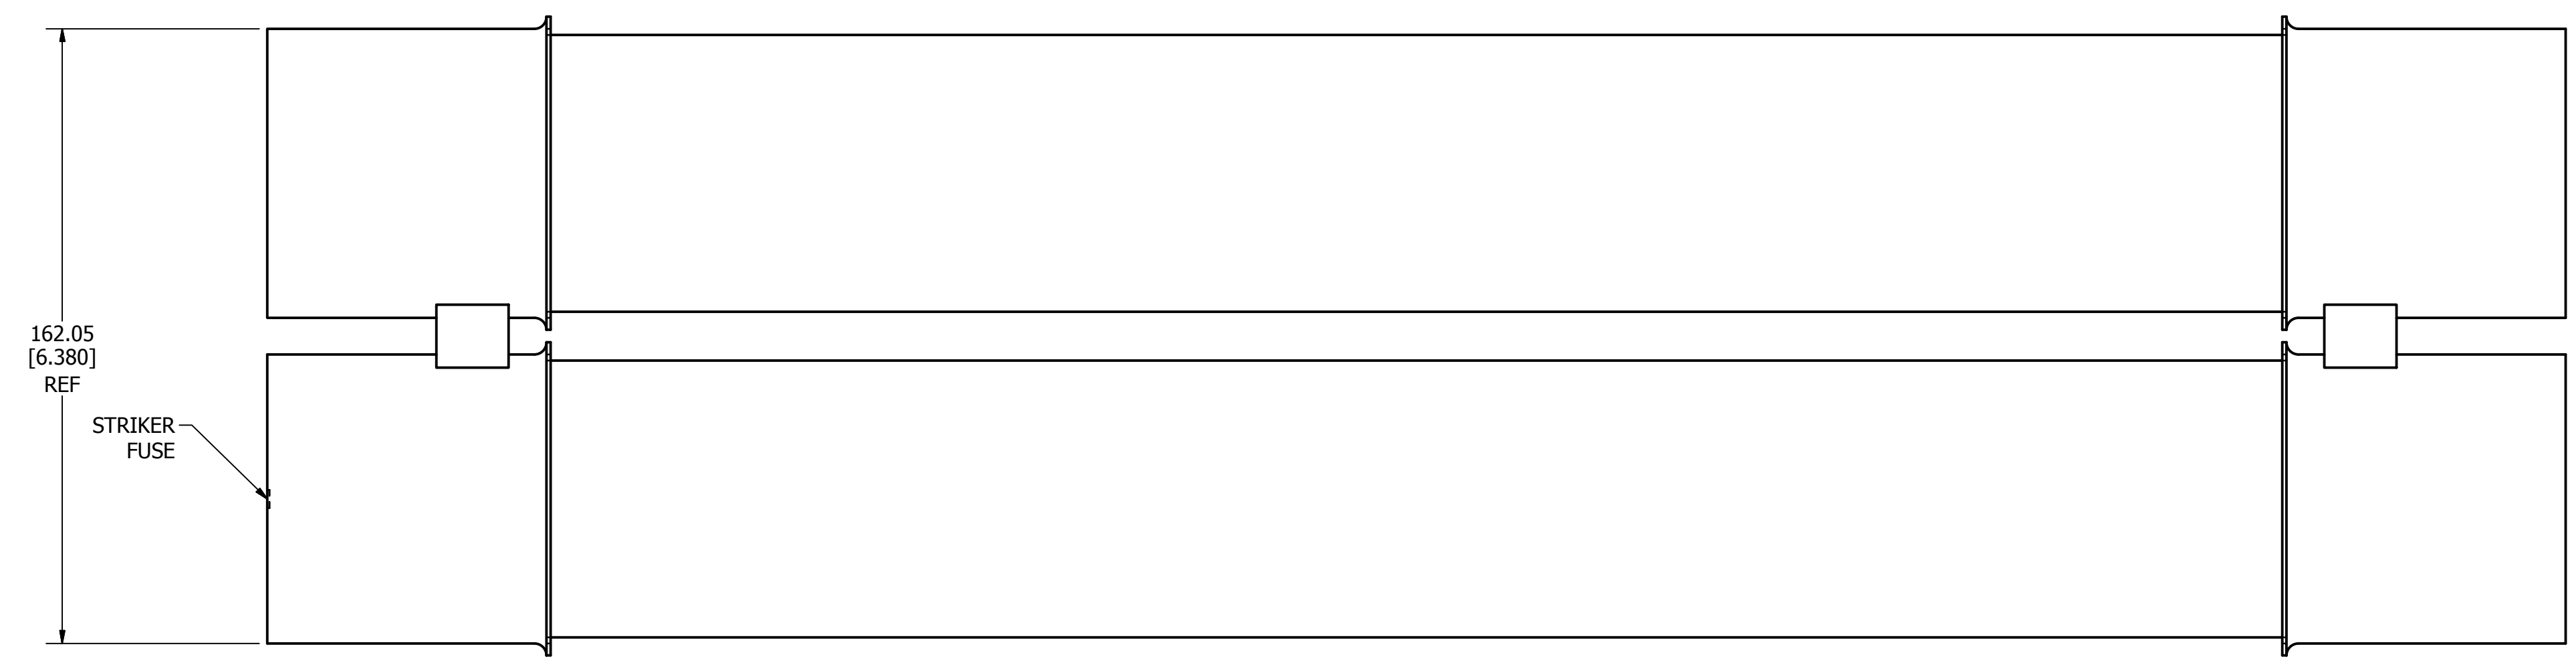

TYPE 2


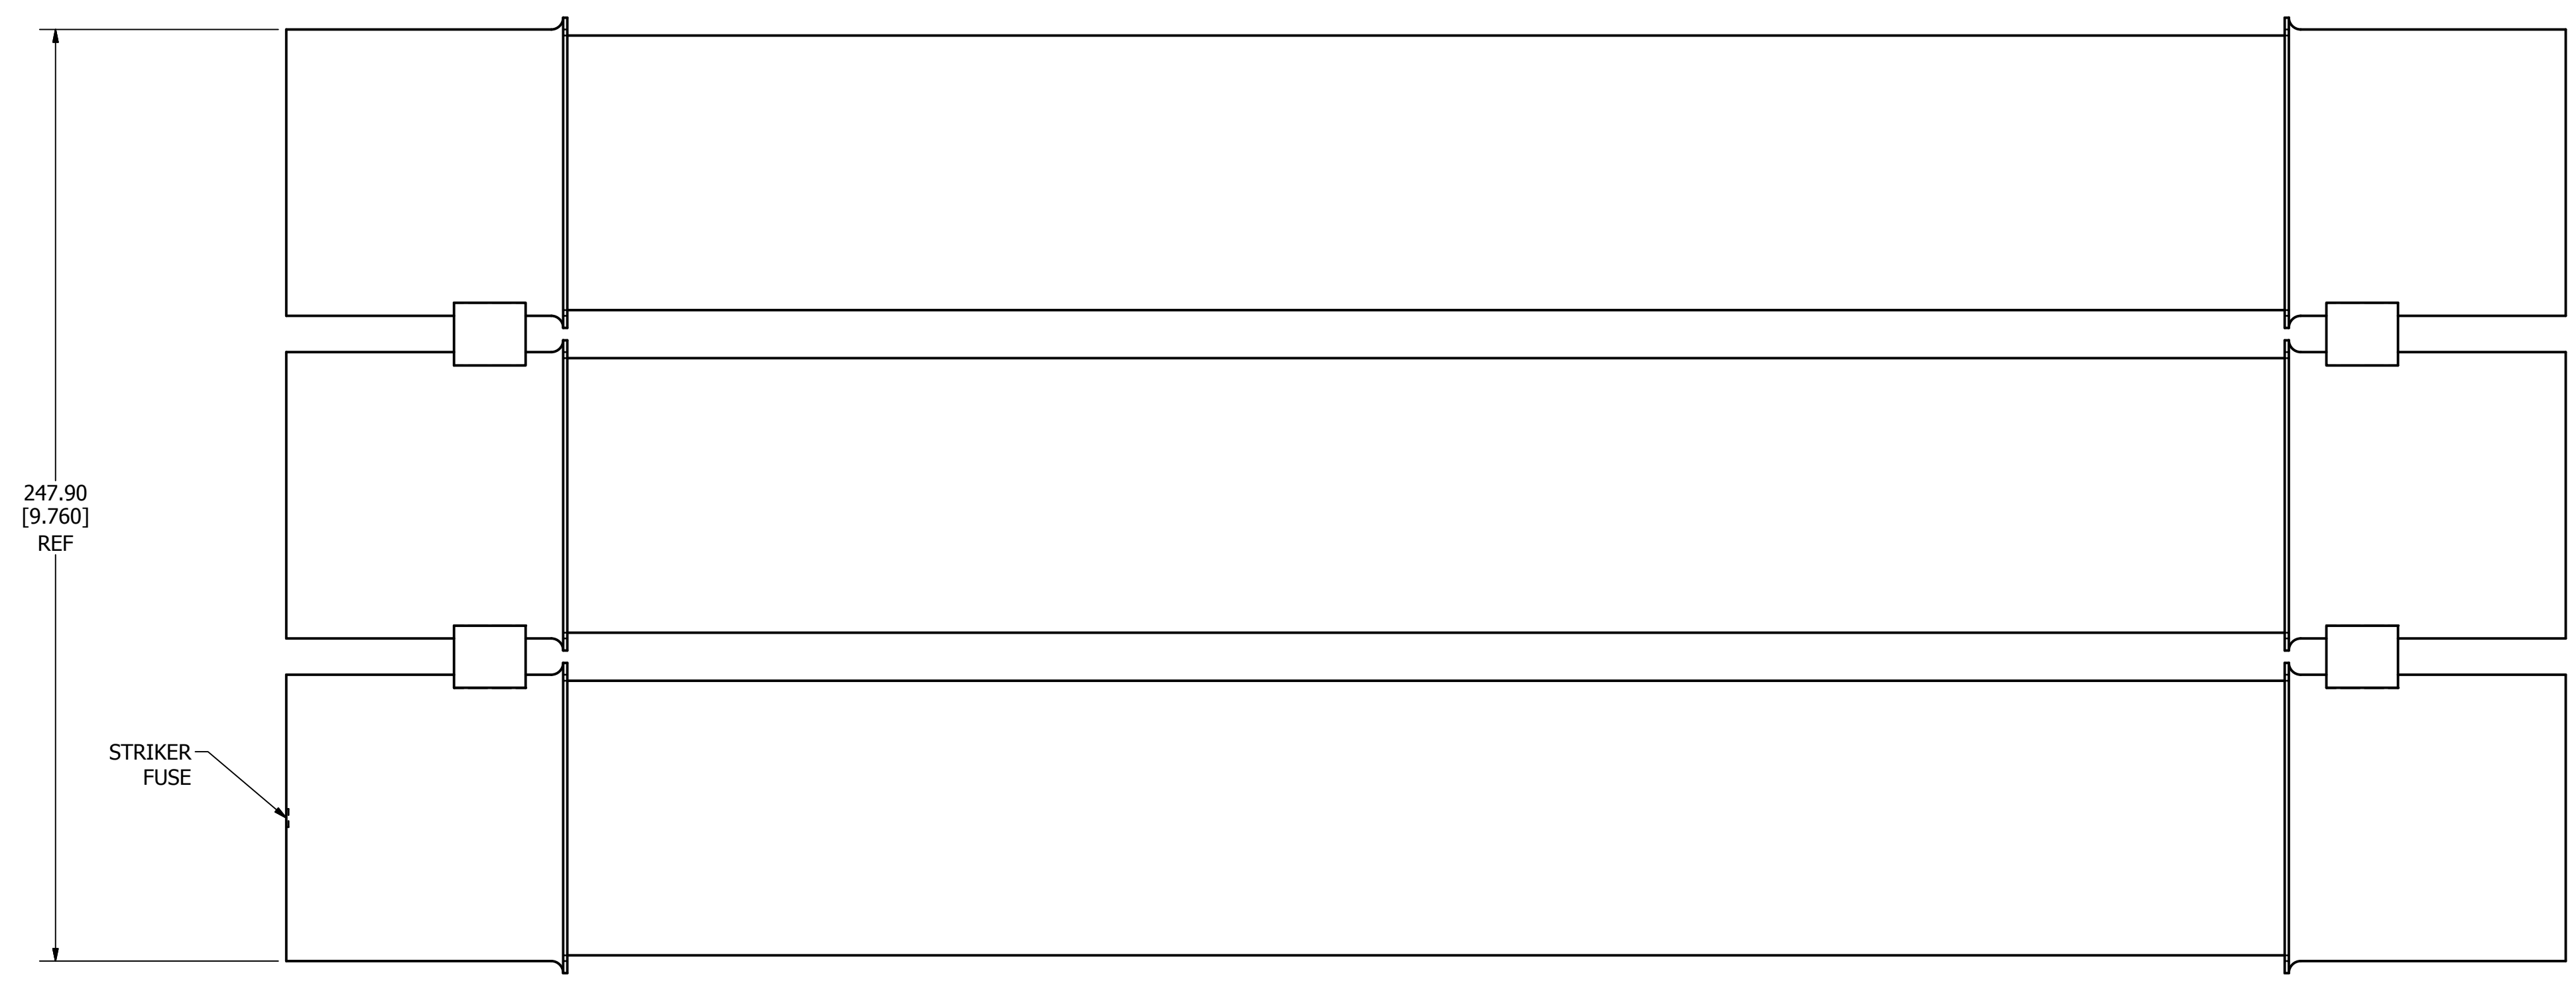


TYPE 3

| | | | |
|---|--|------------|--------------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 10E THRU 300E 15.5KV OUTLINE | | | |
| | | REVISION A | DRWG NO. OL-15NLE SHEET 1 OF 1 |

| PART NO. | TYPE |
|------------|------|
| 15E1C25.8 | 1 |
| 20E1C25.8 | 1 |
| 25E1C25.8 | 1 |
| 30E1C25.8 | 1 |
| 40E1C25.8 | 1 |
| 50E1C25.8 | 1 |
| 65E2C25.8 | 2 |
| 80E2C25.8 | 2 |
| 100E2C25.8 | 2 |


| REVISION | | |
|----------|-----------|-------------------------|
| REV | DATE | DESCRIPTION |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

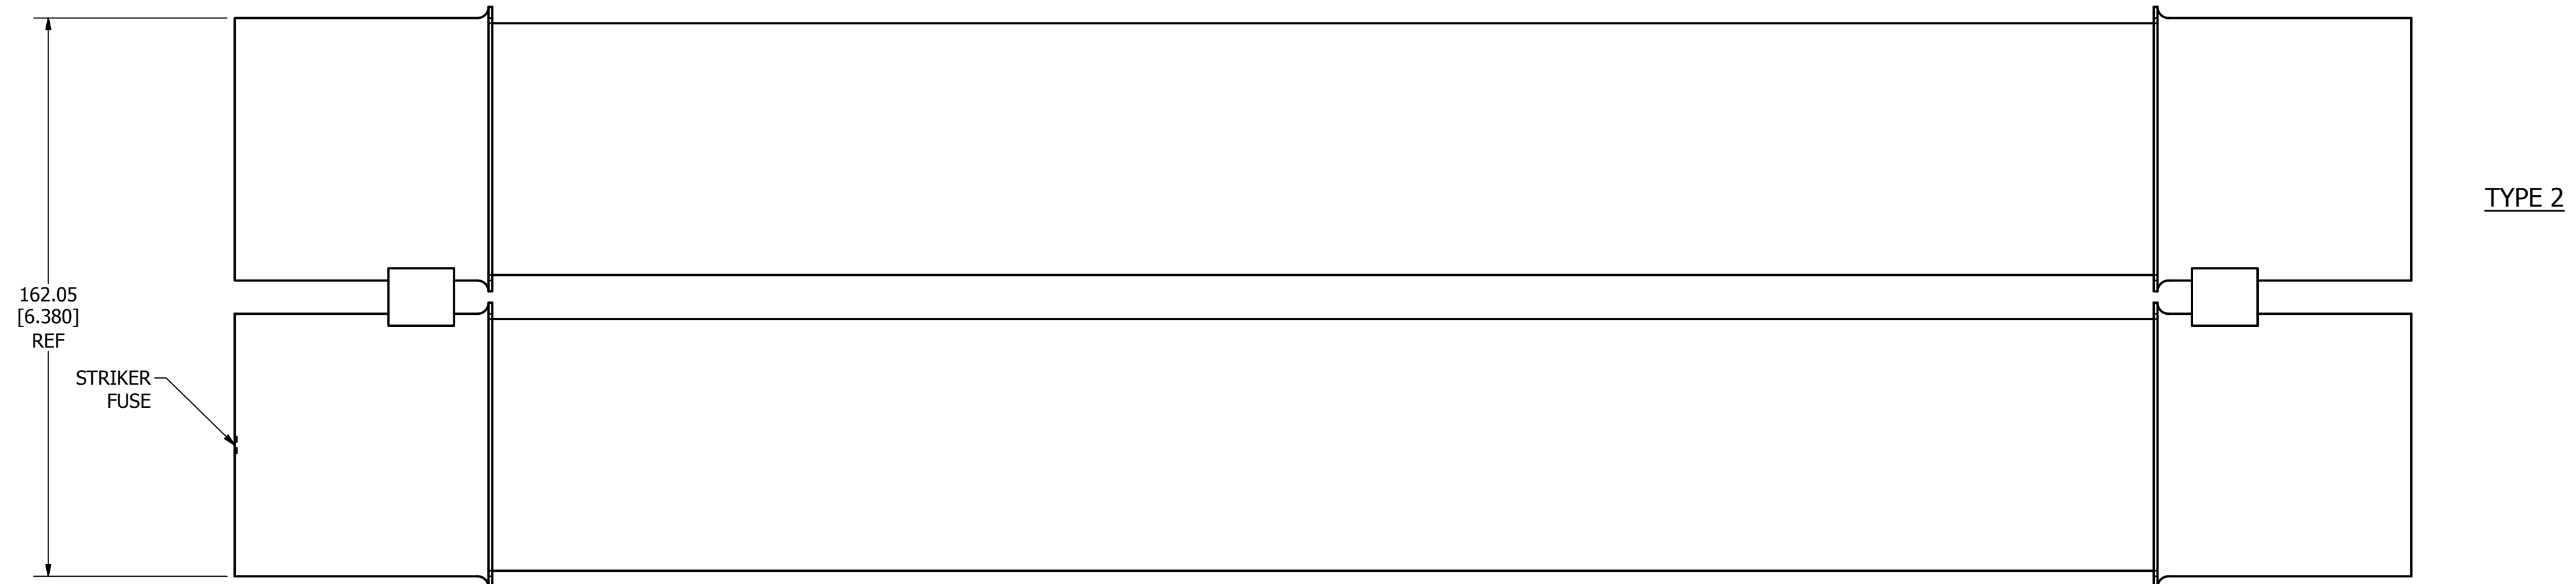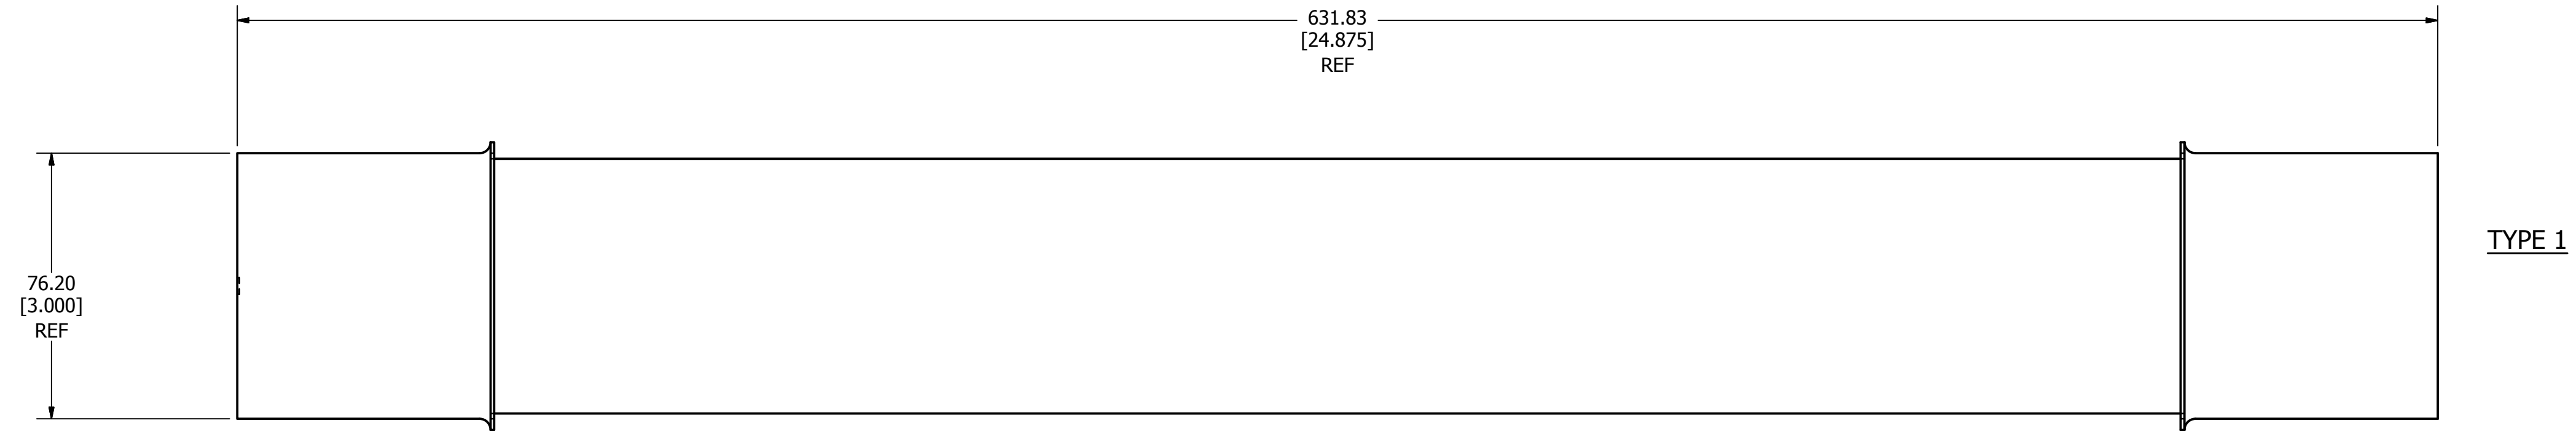


| | | | |
|---|--|-------------------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/19/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 15E THRU 100E 25.8KV OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-ERATEDC25.8 | SHEET 1 OF 1 |

| PART NO. | TYPE |
|-----------|------|
| 3E1C38.0 | 1 |
| 7E1C38.0 | 1 |
| 10E1C38.0 | 1 |
| 15E1C38.0 | 1 |
| 20E1C38.0 | 1 |
| 25E1C38.0 | 1 |
| 30E1C38.0 | 1 |
| 40E1C38.0 | 1 |
| 50E2C38.0 | 2 |
| 65E2C38.0 | 2 |
| 80E2C38.0 | 2 |

| REVISION | | DESCRIPTION |
|----------|-----------|-------------------------|
| REV | DATE | |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

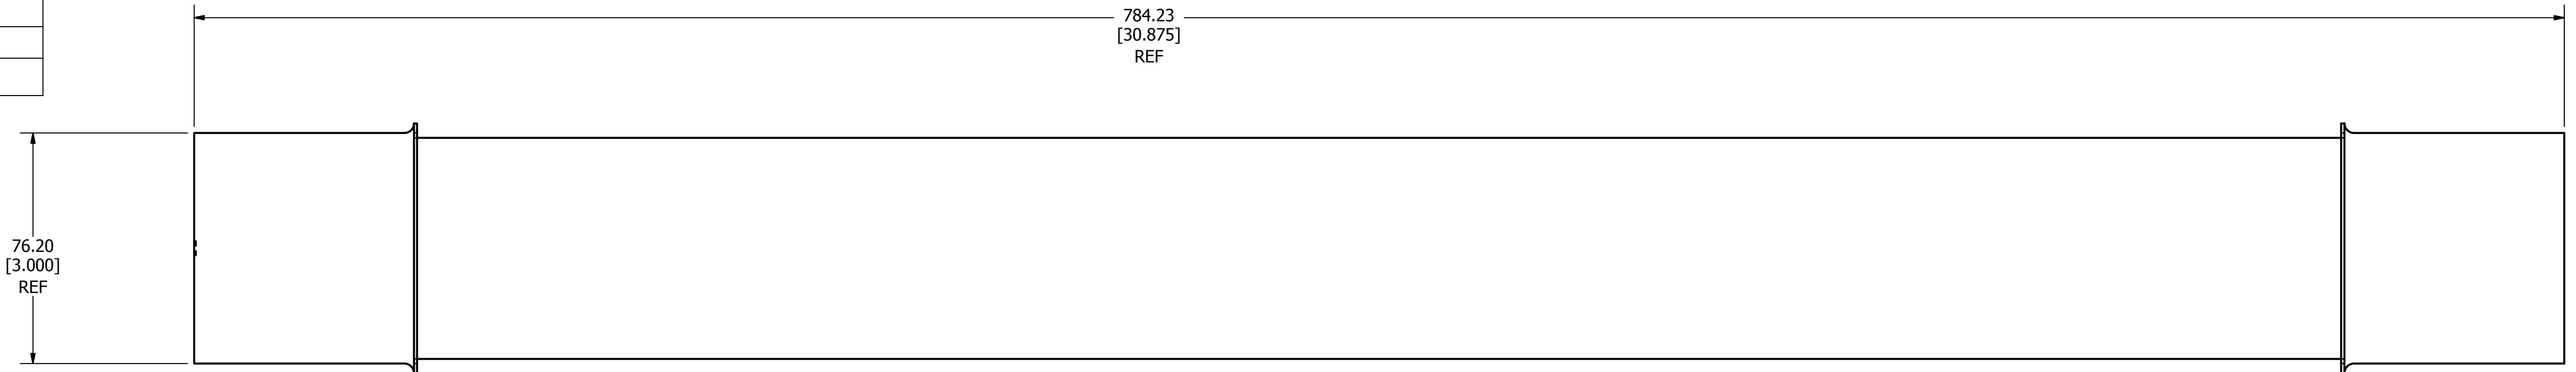

TYPE 1



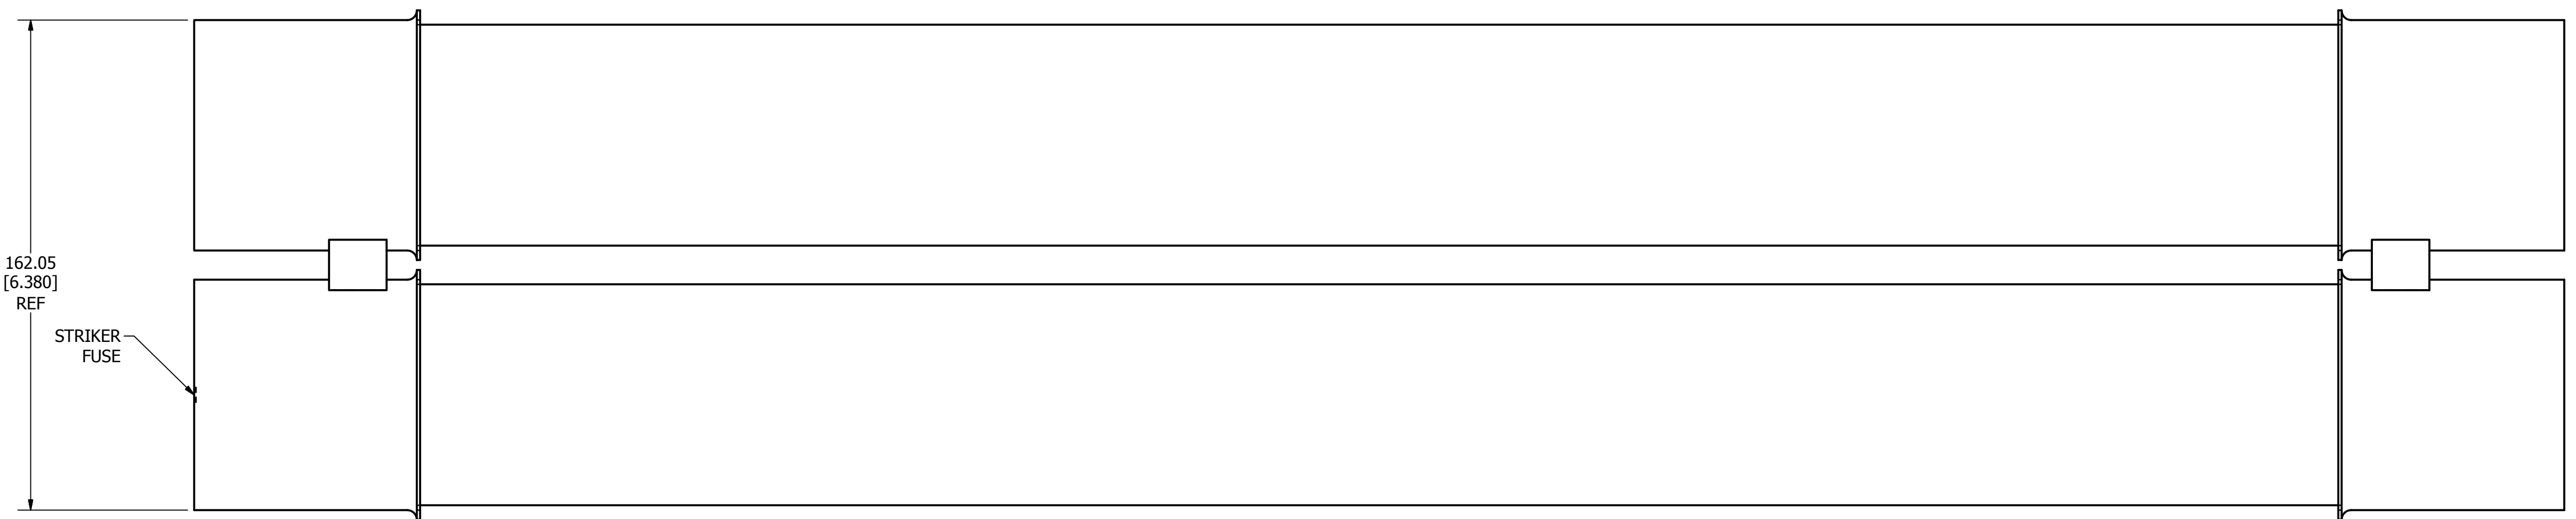


TYPE 2

| | | | |
|---|--|--------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/19/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE 3E THRU 80E 38.0KV OUTLINE | | | |
| | | REVISION A | DRWG NO. OL-ERATEDC38.0 |
| CHICAGO, ILLINOIS 60631 | | SHEET 1 OF 1 | |

| REVISION | | DESCRIPTION |
|----------|-----------|-------------------------|
| REV | DATE | |
| A | 5/28/2014 | 510492GCP - RELEASE MRY |




| PART NO. | TYPE | LENGTH |
|------------|------|--------|
| 10E1CL5.5 | 1 | 14.875 |
| 15E1CL5.5 | 1 | 14.875 |
| 20E1CL5.5 | 1 | 14.875 |
| 25E1CL5.5 | 1 | 14.875 |
| 30E1CL5.5 | 1 | 14.875 |
| 40E1CL5.5 | 1 | 14.875 |
| 50E1CL5.5 | 1 | 14.875 |
| 65E1CL5.5 | 1 | 14.875 |
| 80E1CL5.5 | 1 | 14.875 |
| 100E1CL5.5 | 1 | 14.875 |
| 125E1CL5.5 | 1 | 14.875 |
| 150E1CL5.5 | 1 | 14.875 |
| 225E2CL5.5 | 2 | 15.875 |
| 250E2CL5.5 | 2 | 15.875 |
| 300E2CL5.5 | 2 | 15.875 |
| 350E2CL5.5 | 2 | 15.875 |
| 400E2CL5.5 | 2 | 15.875 |
| 450E2CL5.5 | 2 | 15.875 |
| 500E3CL5.5 | 3 | 15.875 |
| 550E3CL5.5 | 3 | 15.875 |
| 600E3CL5.5 | 3 | 15.875 |

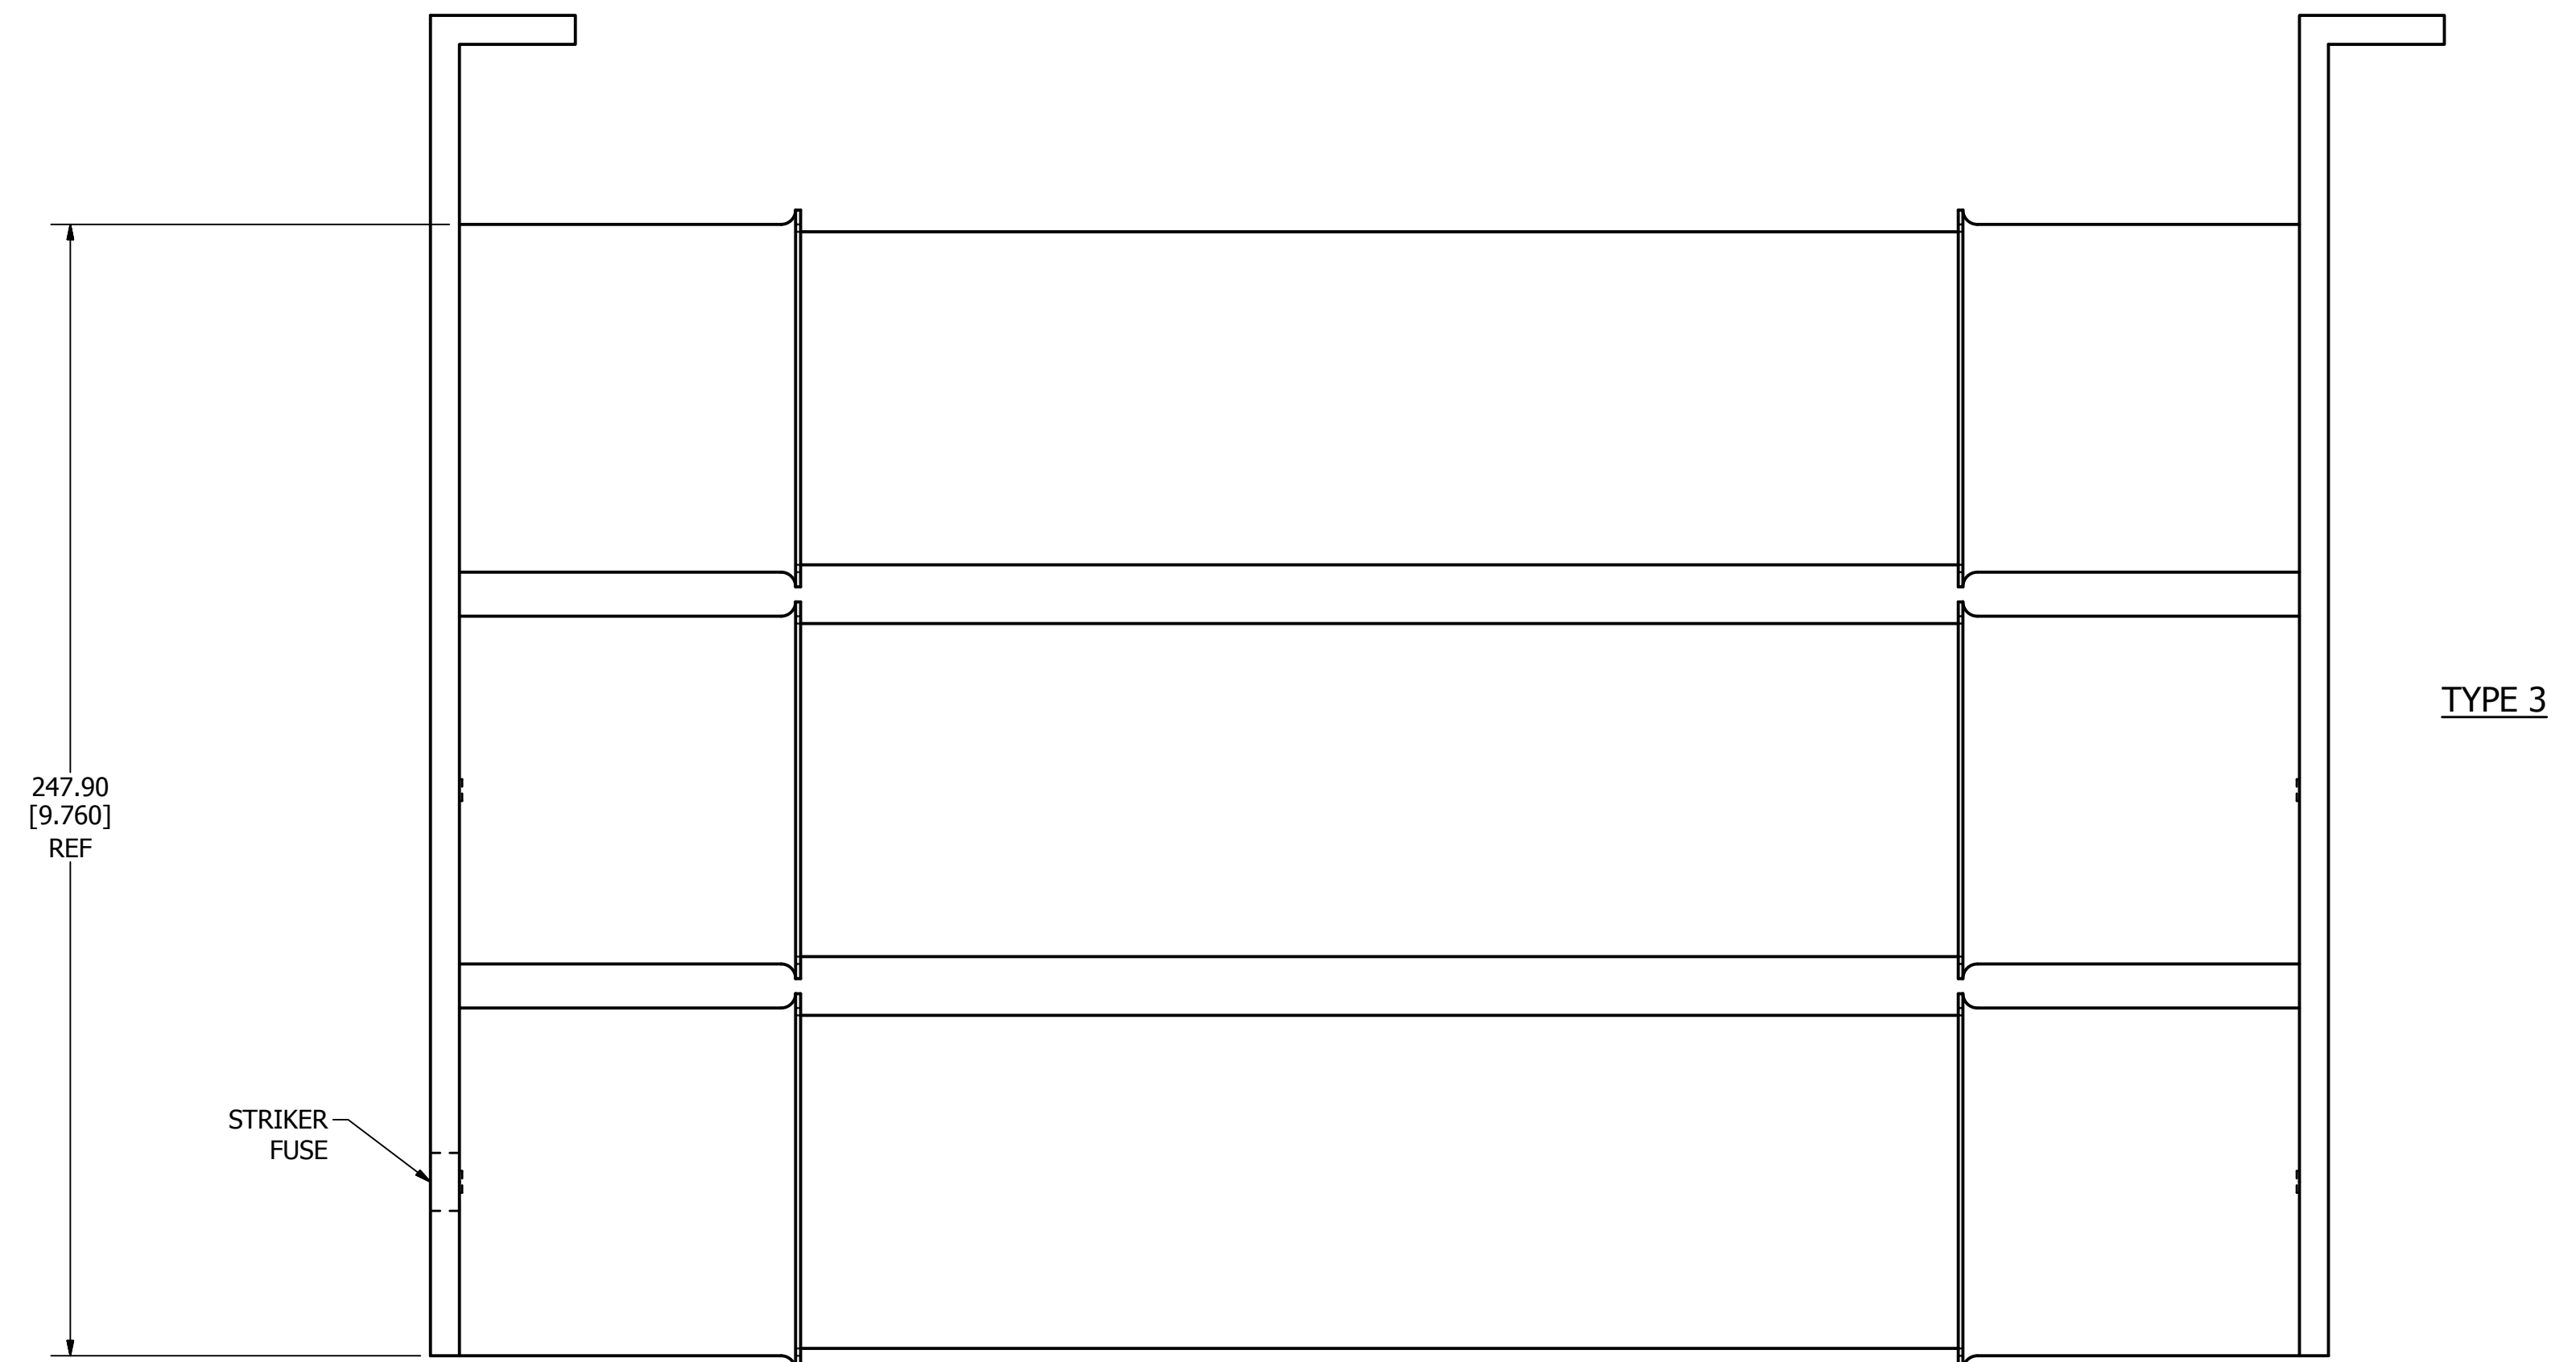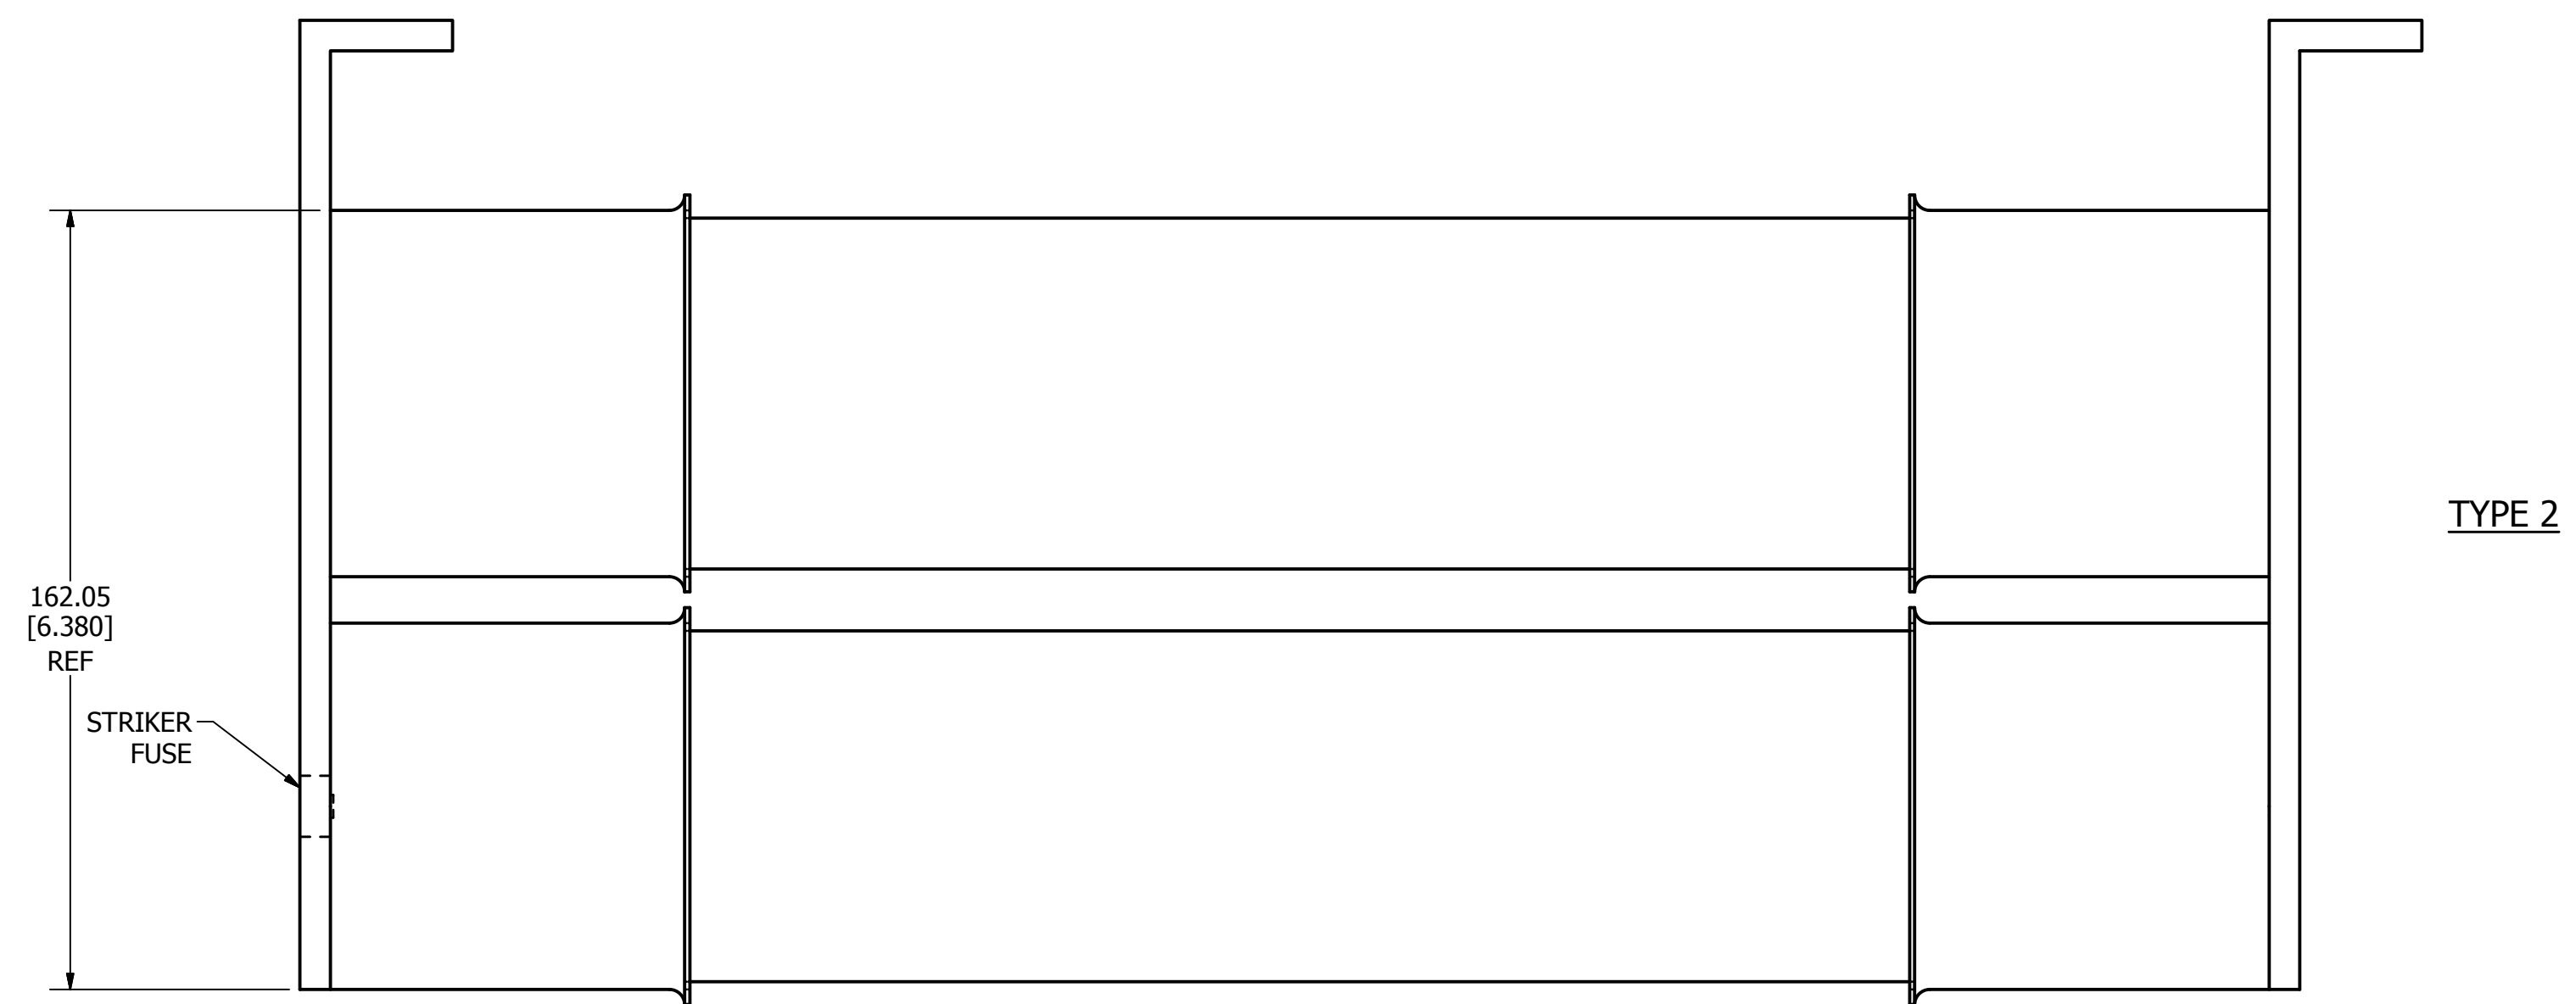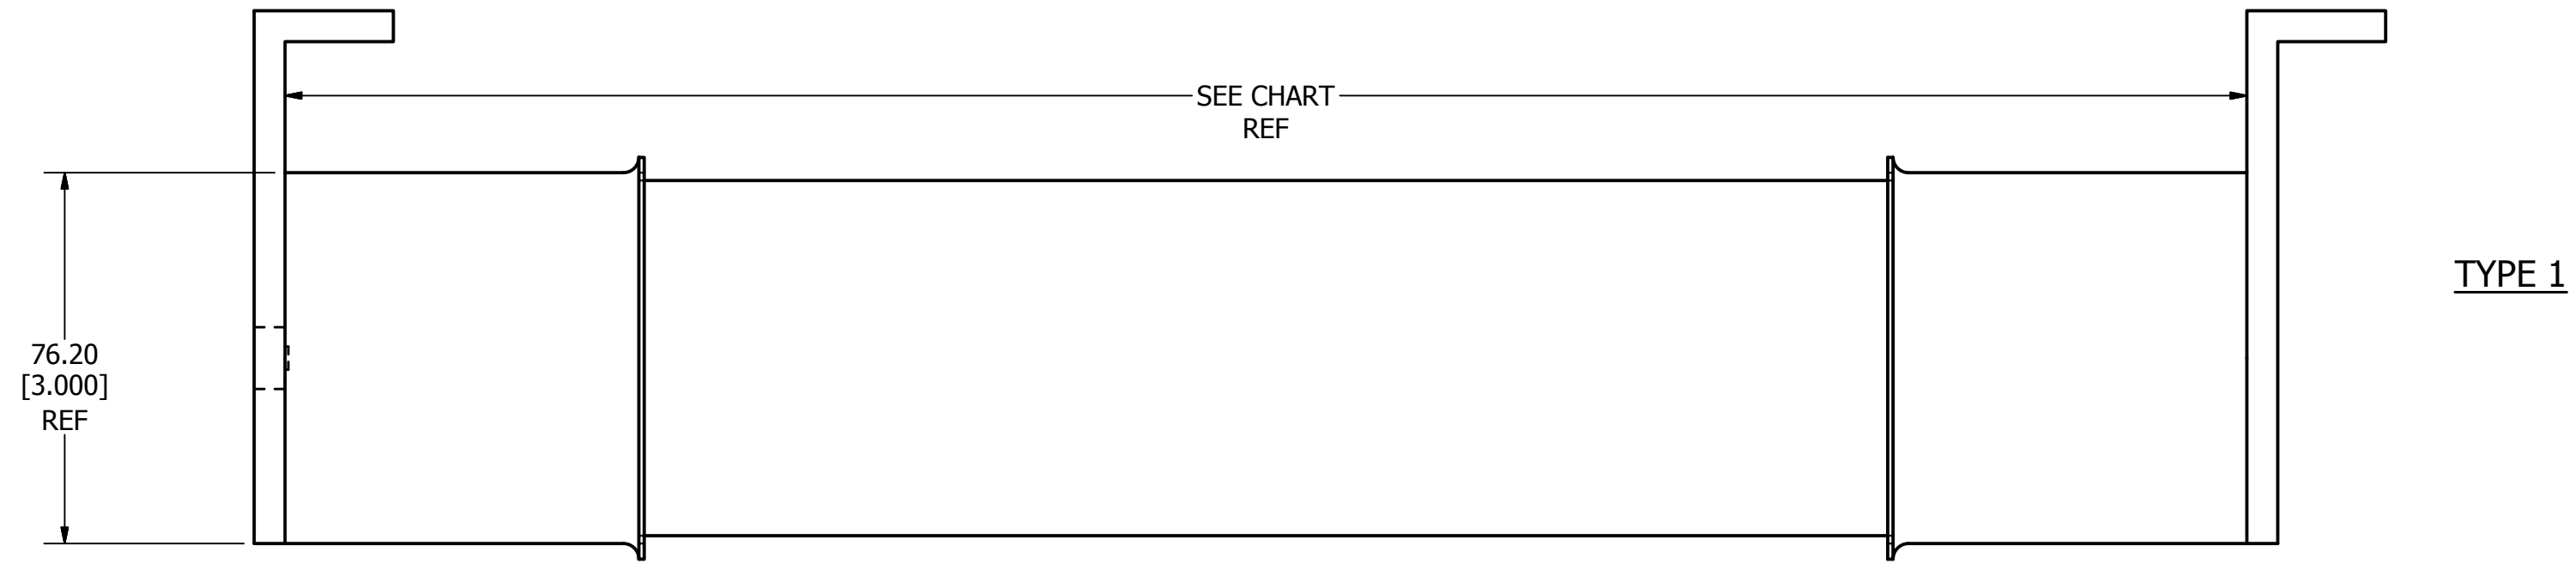

| | | | |
|---|--|-----------|-----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 10E THRU 600E 5.5KV W/ CLIP LOCK OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. | OL-ERATEDCL5.5 SHEET 1 OF 1 |

| REV | DATE | REVISION DESCRIPTION |
|-----|-----------|-------------------------|
| A | 5/28/2014 | 510492GCP - RELEASE MRY |




| PART NO. | TYPE |
|-------------|------|
| 10E1CL8.25 | 1 |
| 15E1CL8.25 | 1 |
| 20E1CL8.25 | 1 |
| 25E1CL8.25 | 1 |
| 30E1CL8.25 | 1 |
| 40E1CL8.25 | 1 |
| 50E1CL8.25 | 1 |
| 65E1CL8.25 | 1 |
| 80E1CL8.25 | 1 |
| 100E1CL8.25 | 1 |
| 125E2CL8.25 | 2 |
| 150E2CL8.25 | 2 |
| 175E2CL8.25 | 2 |
| 200E2CL8.25 | 2 |
| 250E2CL8.25 | 2 |
| 300E2CL8.25 | 2 |
| 350E3CL8.25 | 3 |

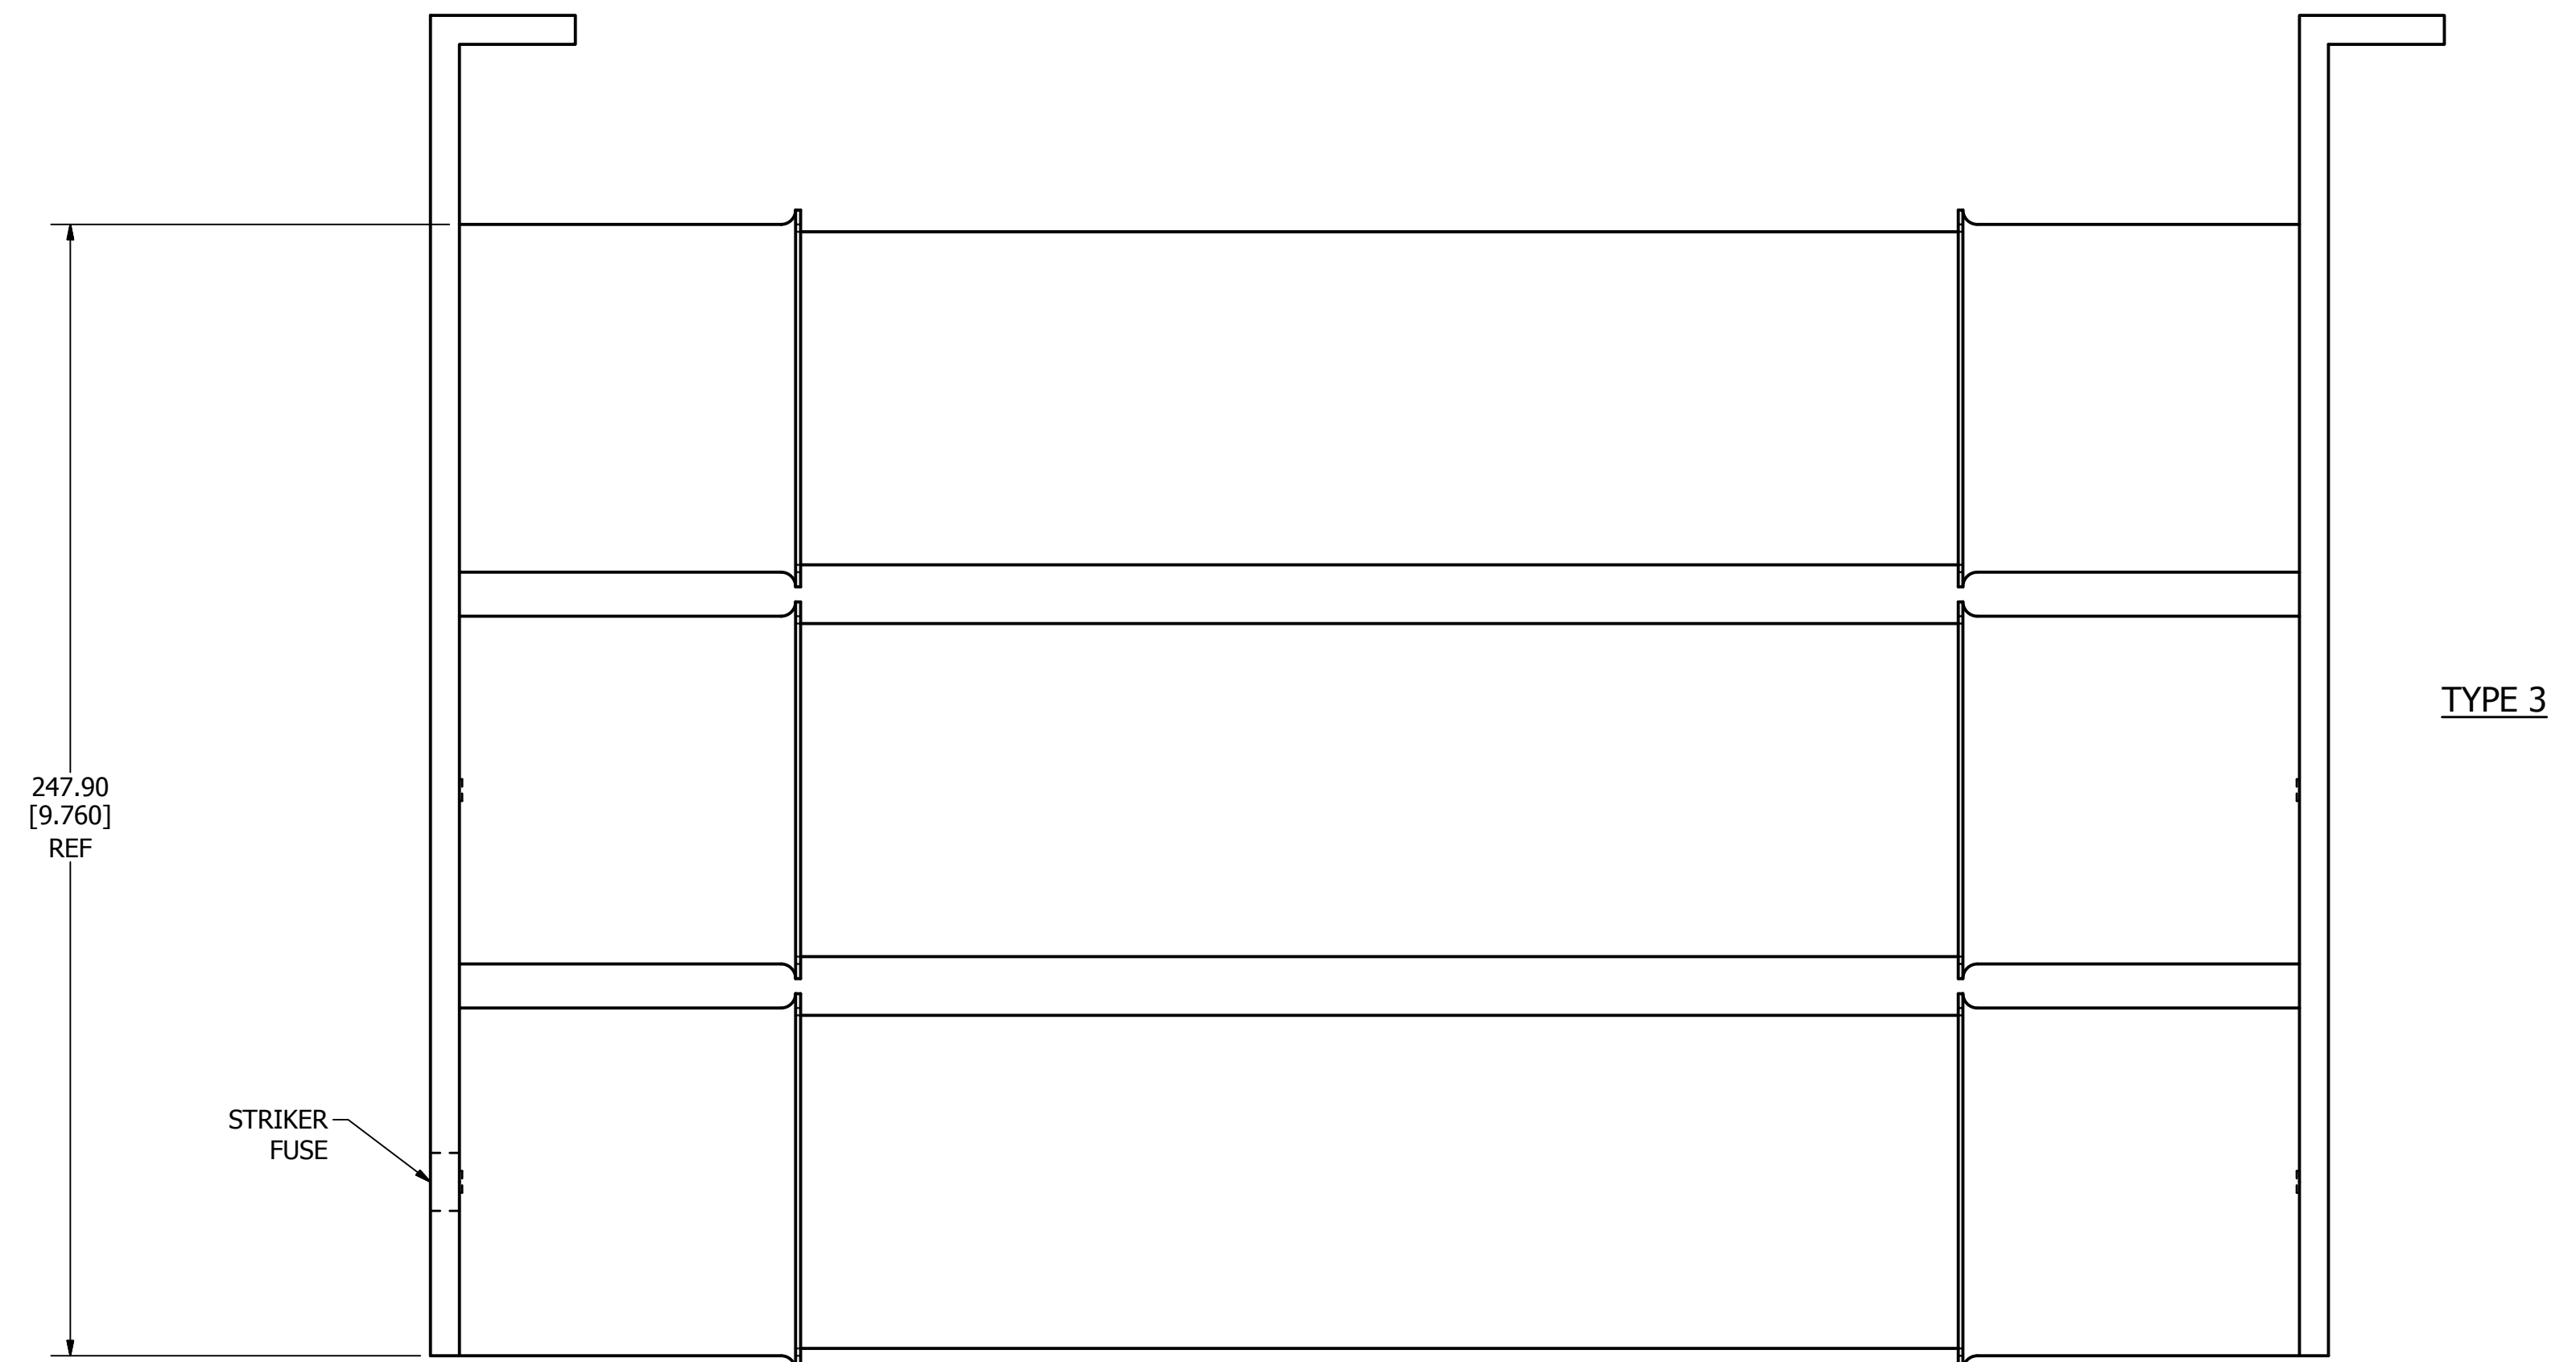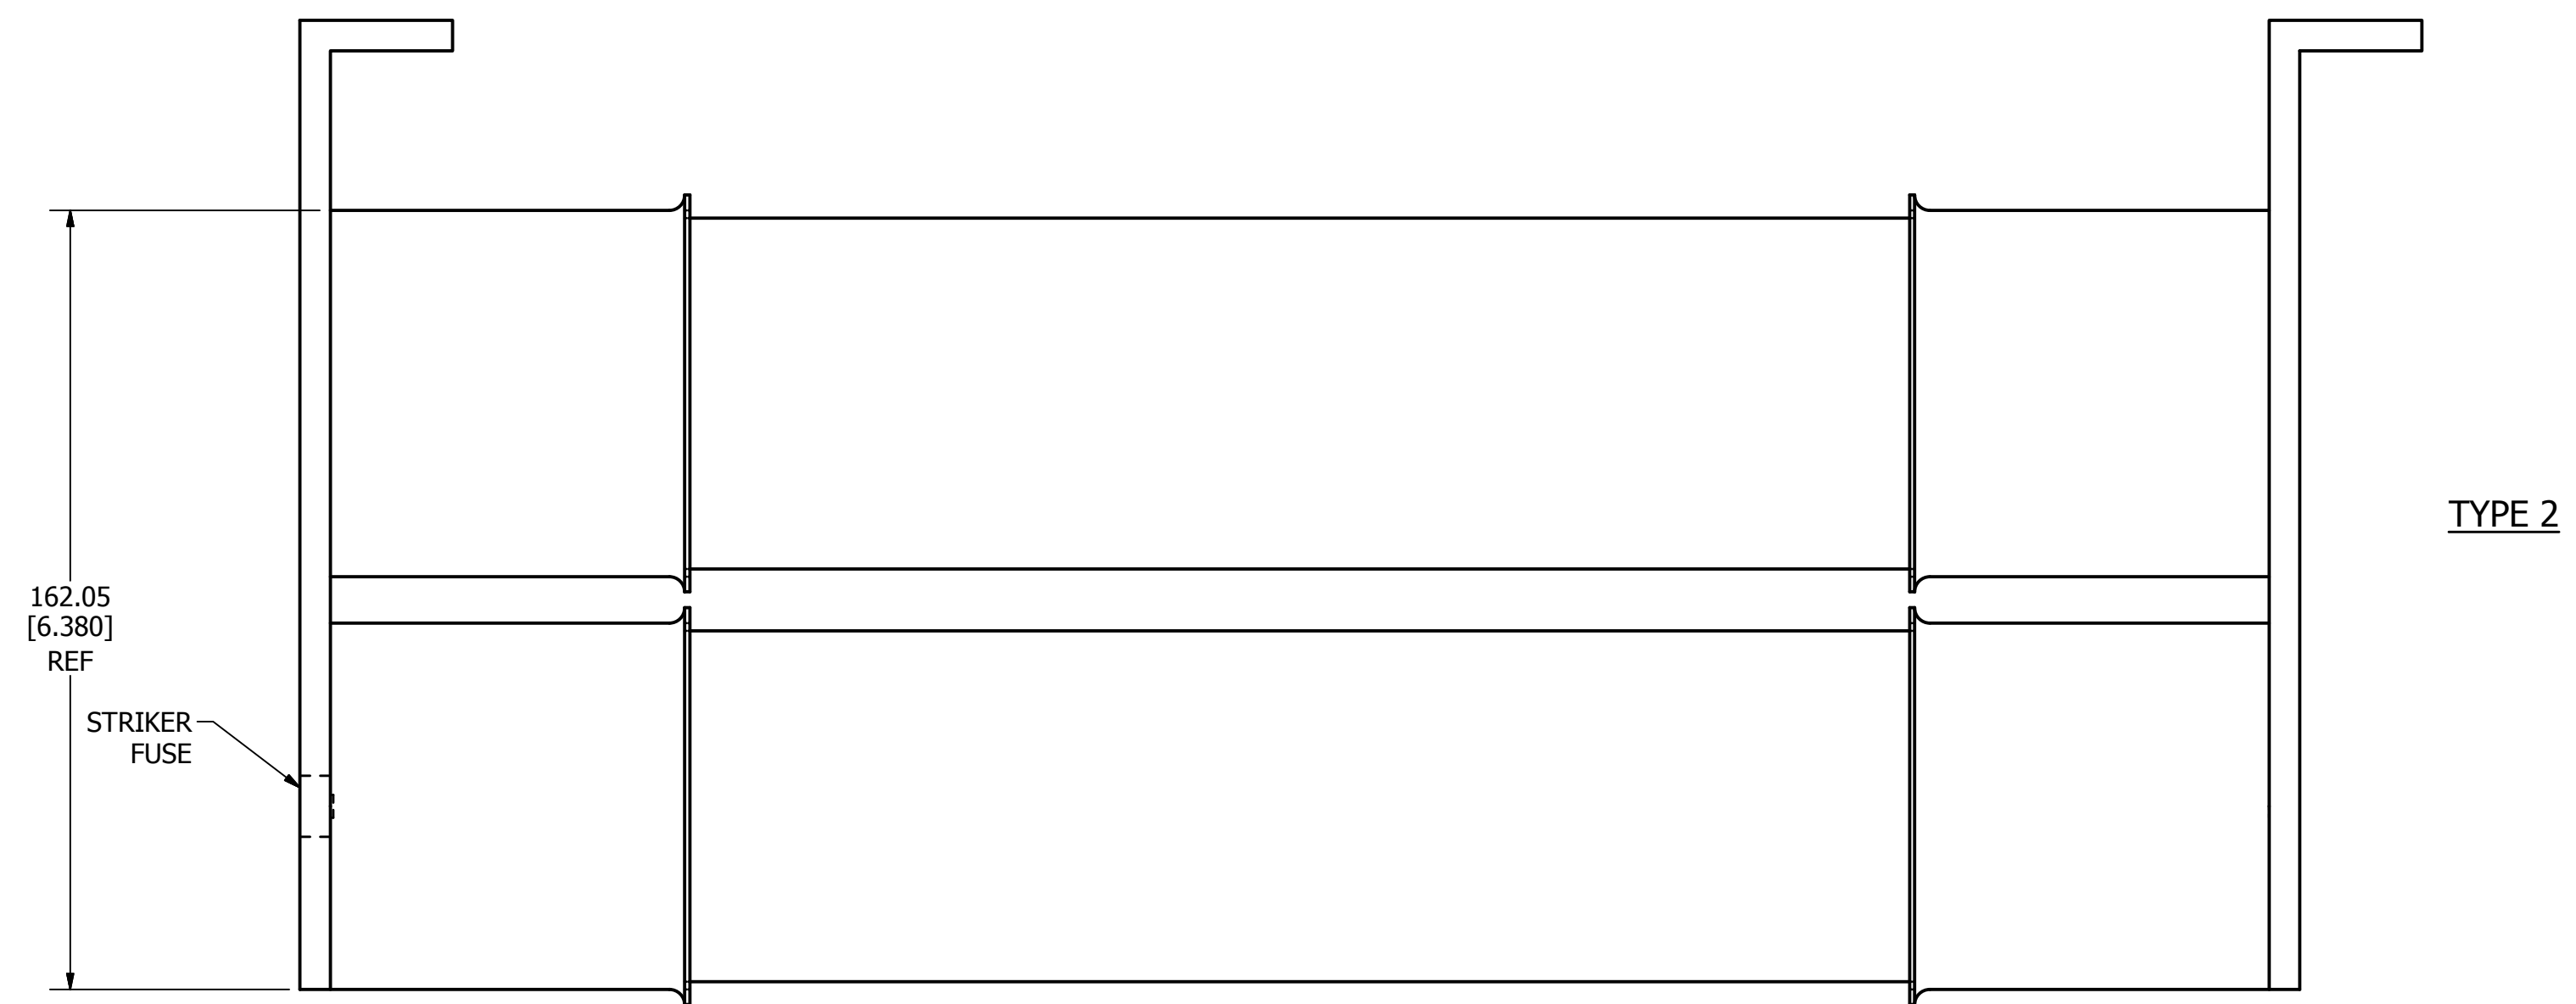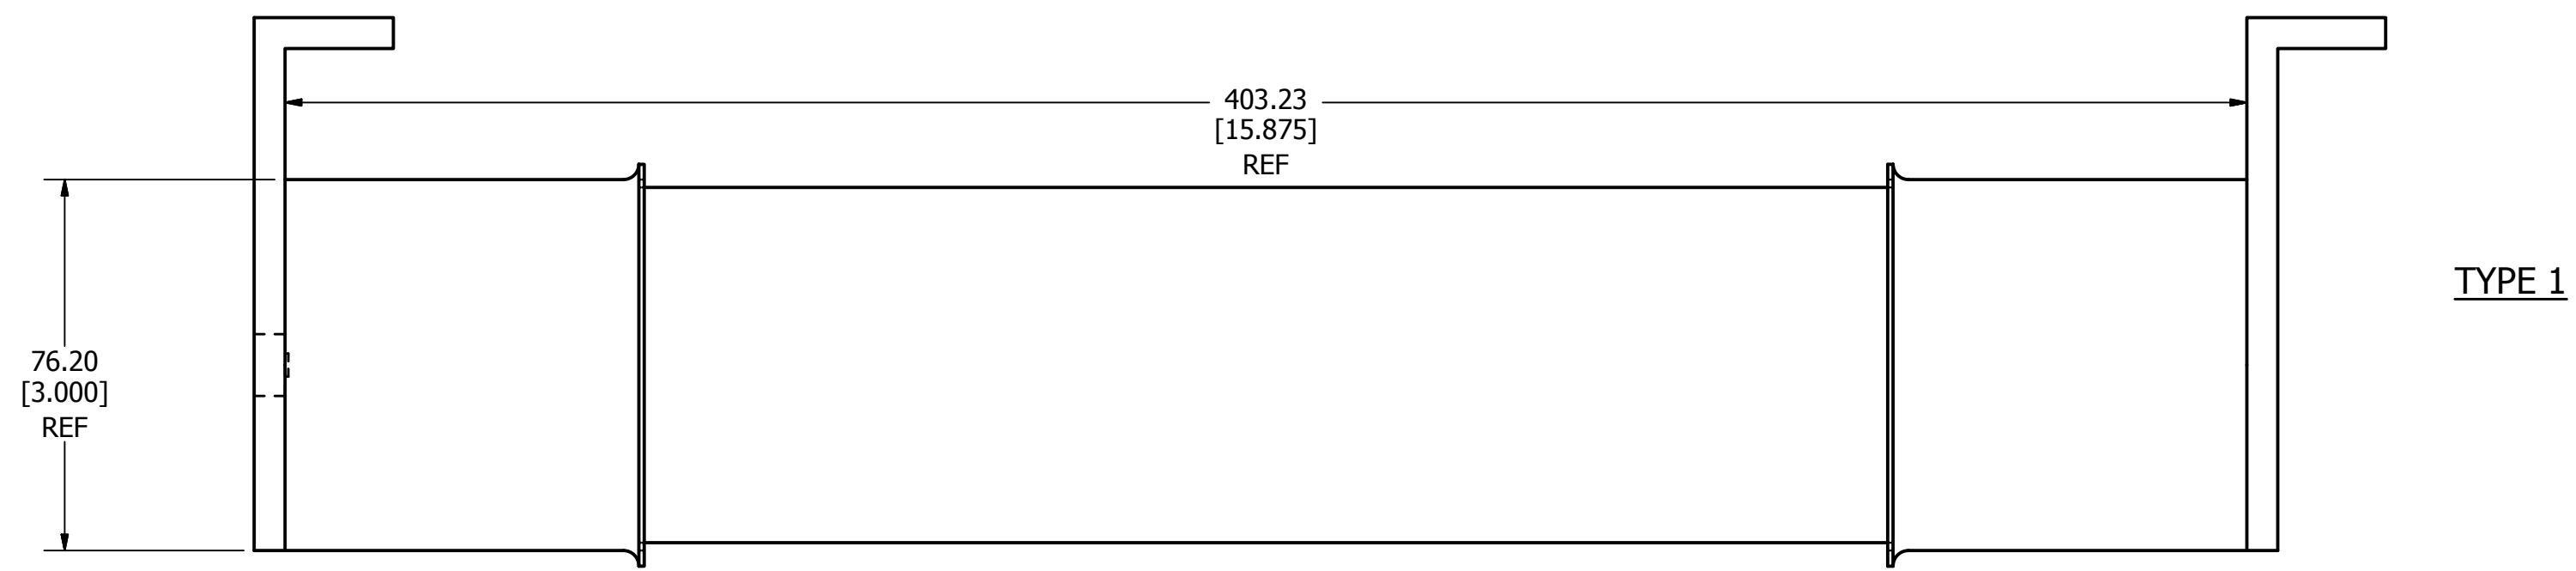

| | | | |
|---|--|--------------------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/19/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 10E THRU 350E 8.25KV W/ CLIP LOCK OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-ERATEDCL8.25 | SHEET 1 OF 1 |

| REV | DATE | DESCRIPTION |
|-----|-----------|-------------------------|
| A | 5/28/2014 | 510492GCP - RELEASE MRY |

| PART NO. | TYPE | LENGTH |
|-------------|------|--------|
| 10E1CL15.5 | 1 | 17.875 |
| 15E1CL15.5 | 1 | 17.875 |
| 20E1CL15.5 | 1 | 17.875 |
| 25E1CL15.5 | 1 | 17.875 |
| 30E1CL15.5 | 1 | 17.875 |
| 40E1CL15.5 | 1 | 17.875 |
| 50E1CL15.5 | 1 | 17.875 |
| 65E1CL15.5 | 1 | 20.875 |
| 80E1CL15.5 | 1 | 20.875 |
| 100E1CL15.5 | 1 | 20.875 |
| 125E2CL15.5 | 2 | 20.875 |
| 150E2CL15.5 | 2 | 20.875 |
| 150E3CL15.5 | 3 | 20.875 |
| 175E2CL15.5 | 2 | 20.875 |
| 200E2CL15.5 | 2 | 20.875 |
| 200E3CL15.5 | 3 | 20.875 |
| 250E3CL15.5 | 3 | 20.875 |
| 300E3CL15.5 | 3 | 20.875 |

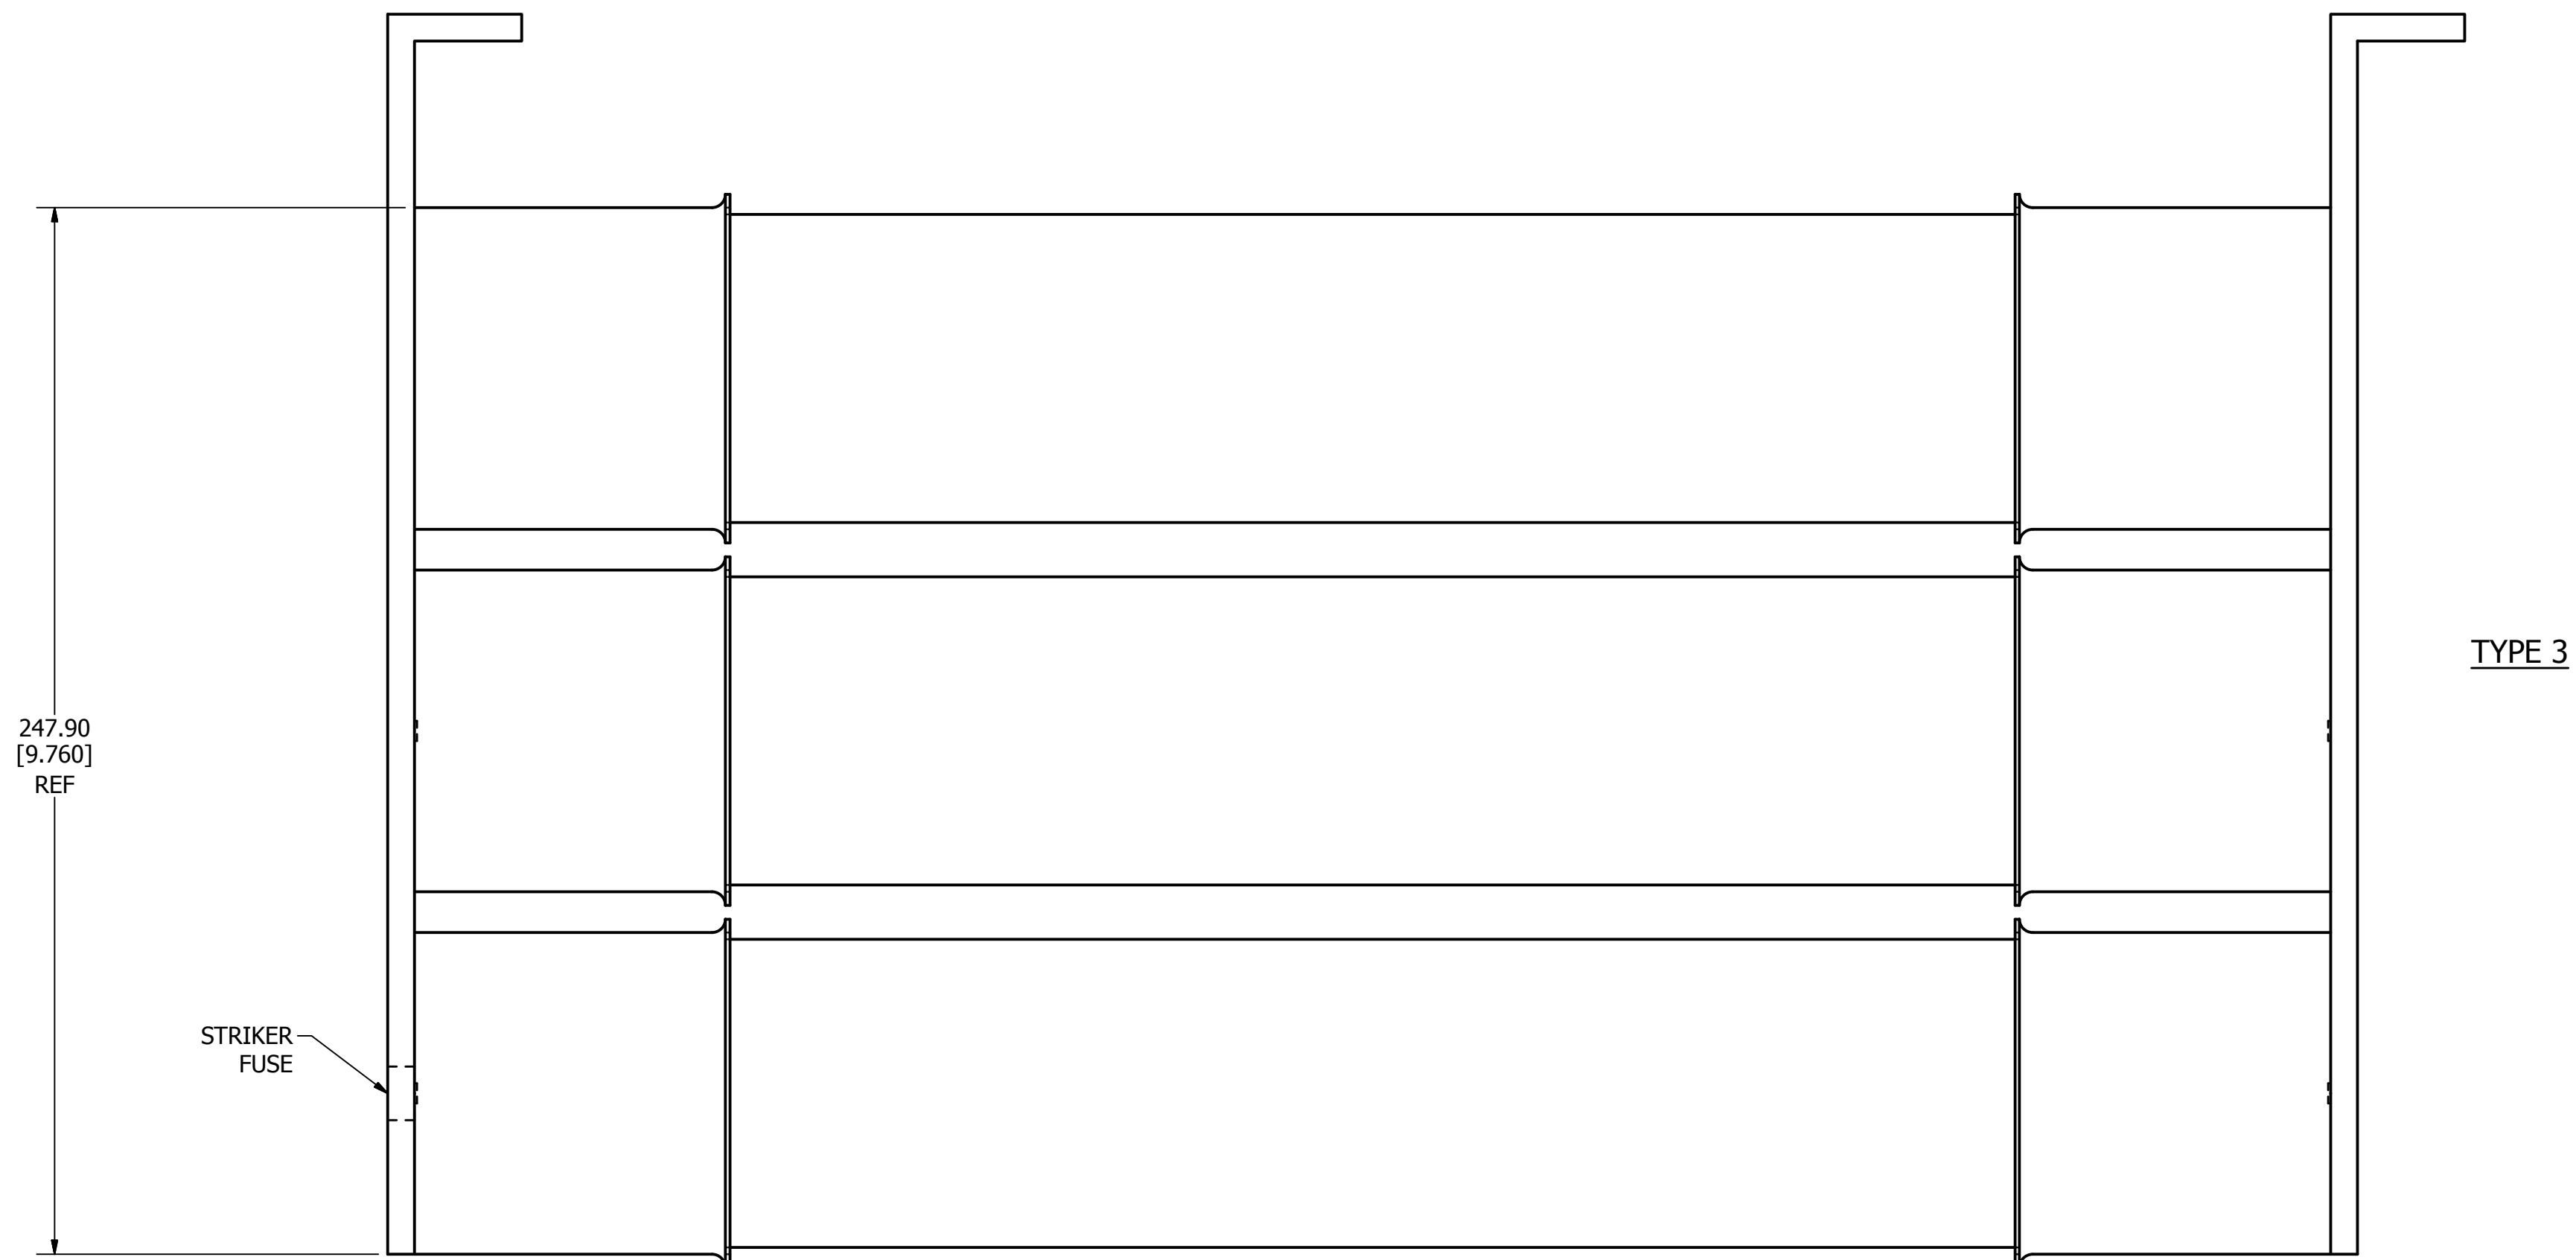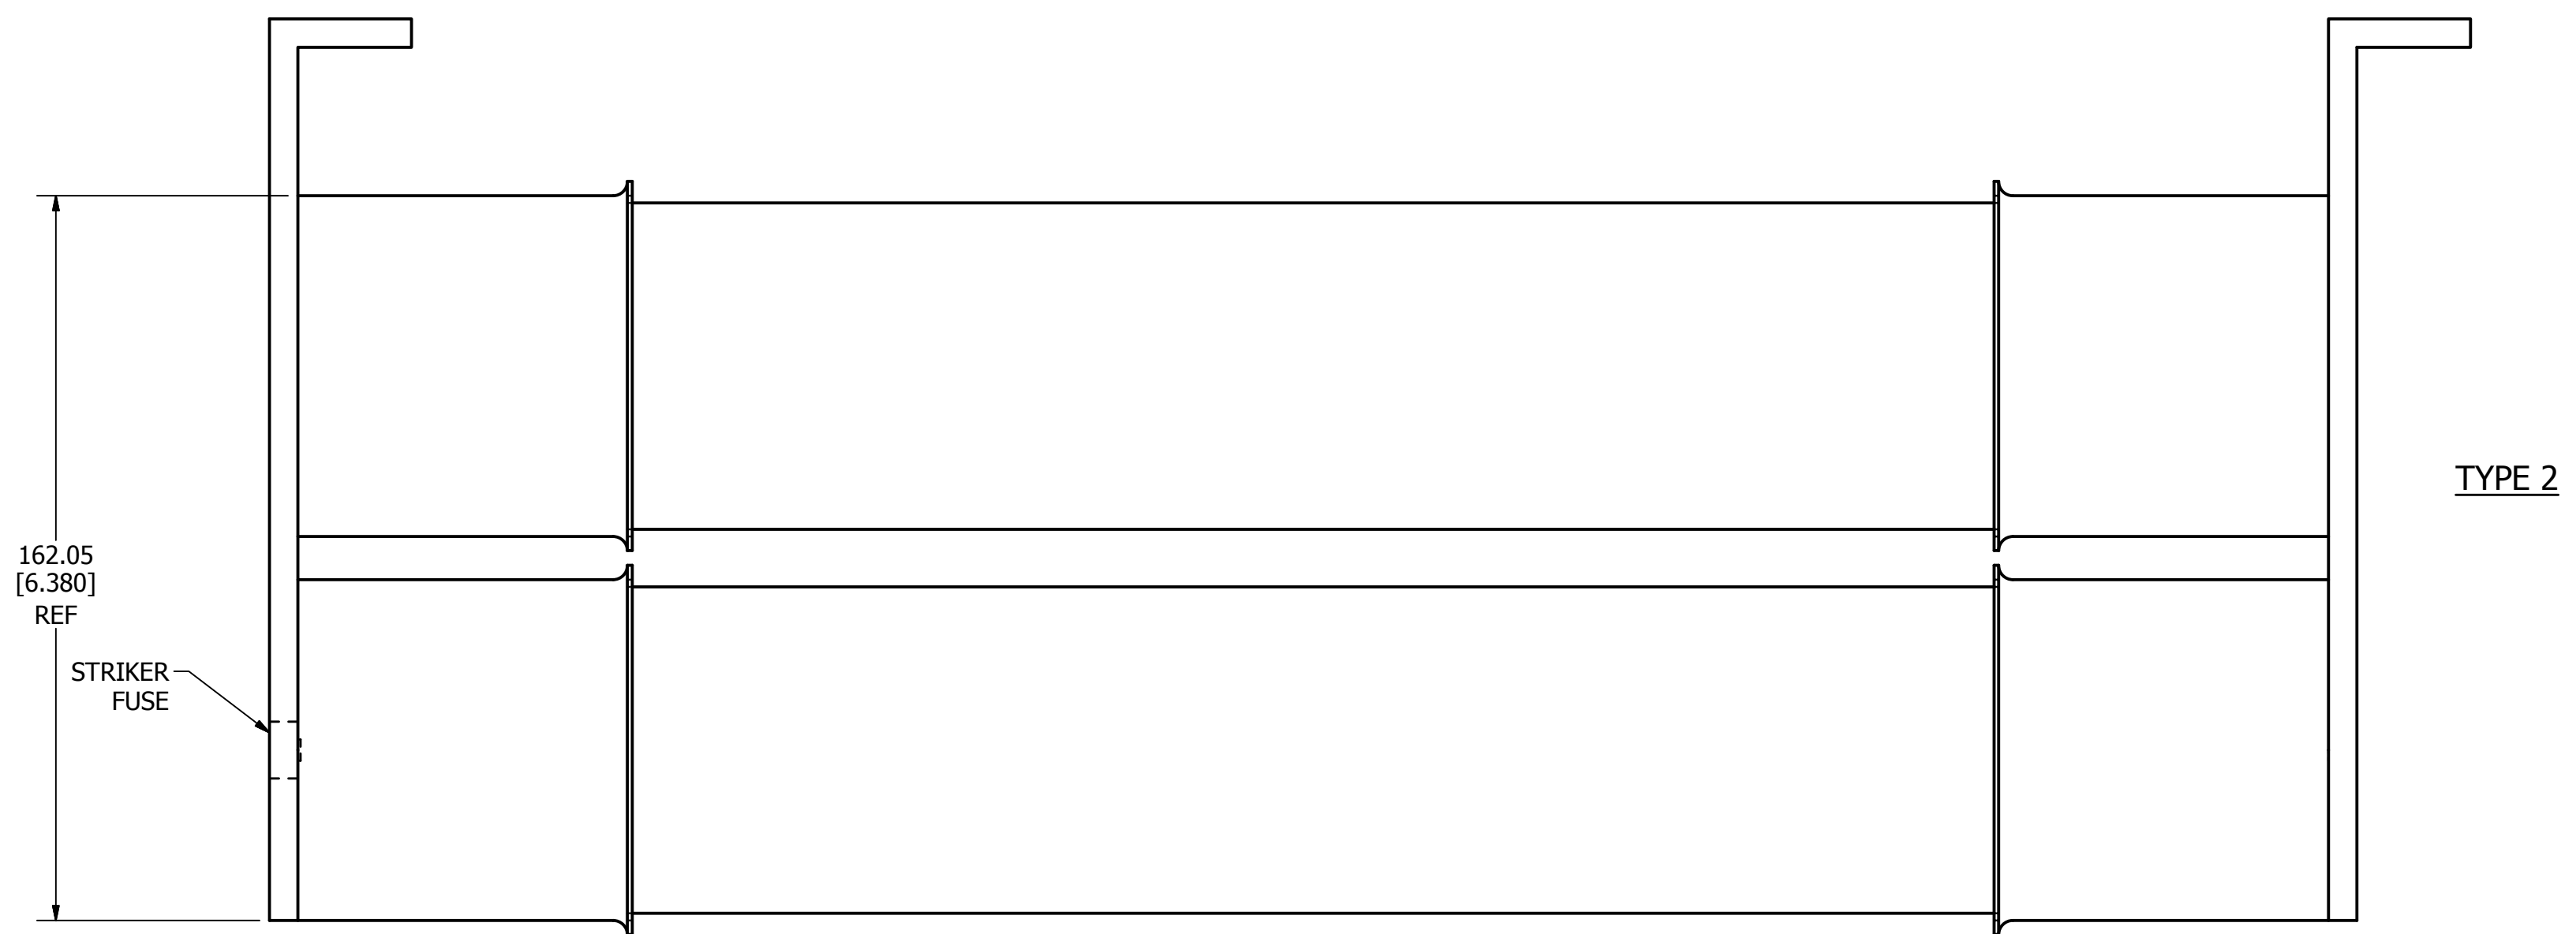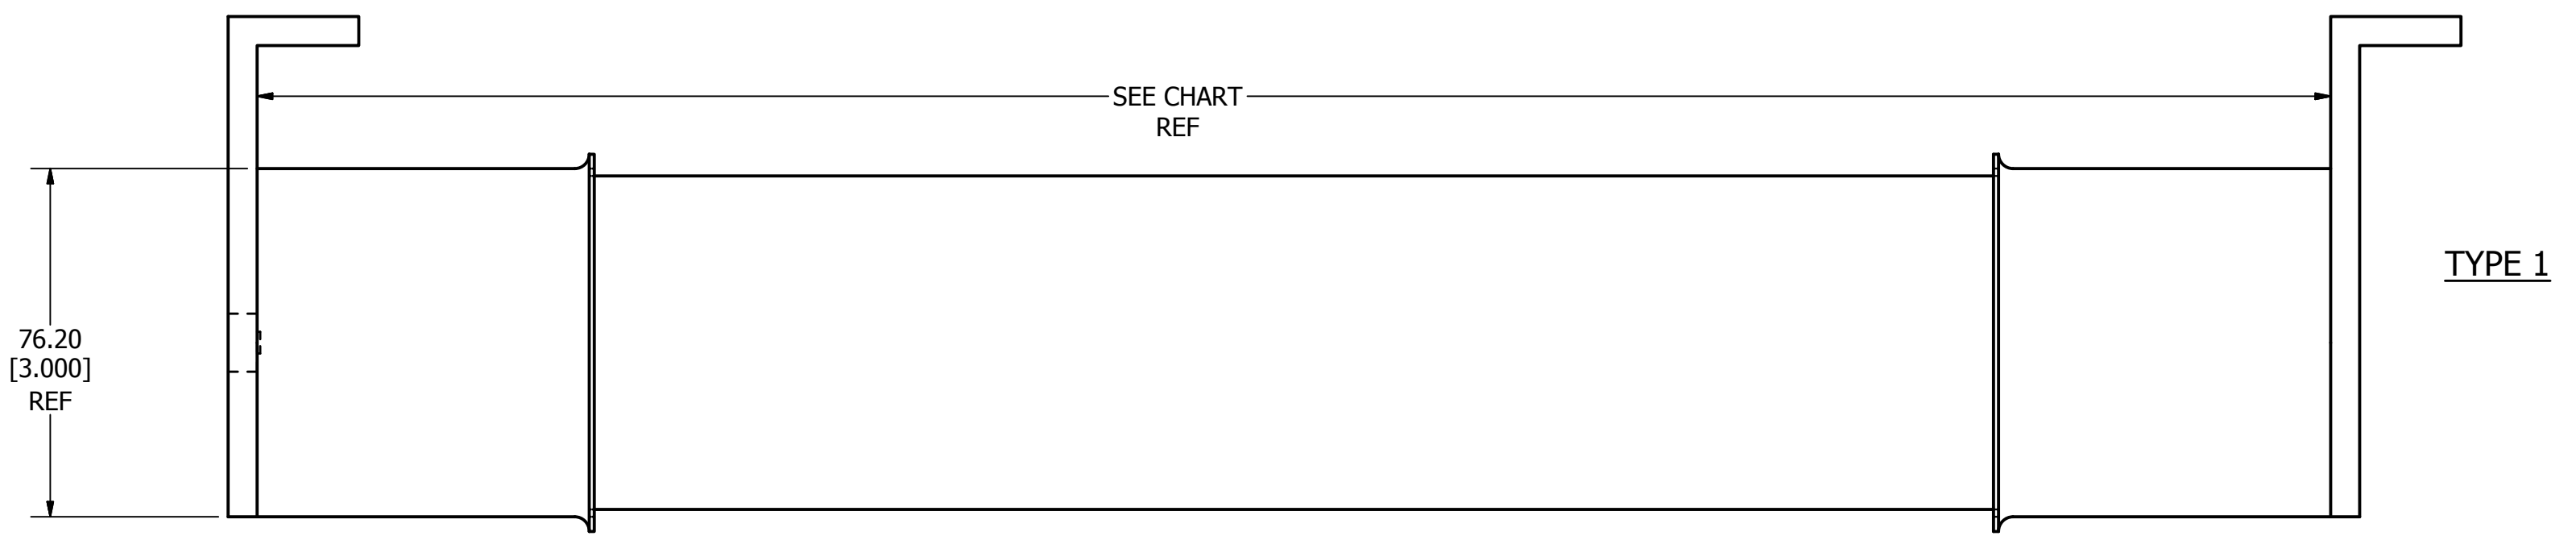

| | | | |
|---|--|--------------------------|----------------------------|
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (S) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | FINISH | | |
| DRW MYORK | DATE 2/18/2014 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
| TITLE | 10E THRU 300E 15.5KV W/ CLIP LOCK OUTLINE | | |
| CHICAGO, ILLINOIS 60631 | REVISION A | DRWG NO. OL-ERATEDCL15.5 | SHEET 1 OF 1 |