


REVISION							
REV	DATE	DESCRIPTION					
Α	5/5/23	526436GCP - RELEASE MRY					

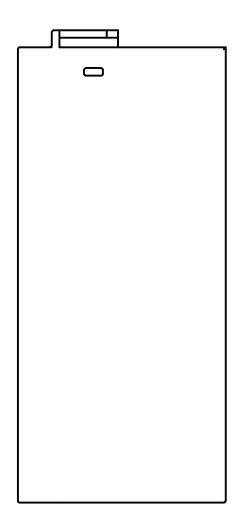

1										
NO	COMPONE	NT NO	DESCRIPTION			QTY/M	U/M			
BILL OF MATERIAL										
<	:S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE								
•		DENOTES CRITICAL CHARACTERISTICS.								
СРК		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE								
<u>(ST</u>)		DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.								
	СР	MUST	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.							
MATL SPEC			FINISH							
DRW myorl	DRW myork		DATE 1/10/2023	SCALE NTS	TS		NT 1S/PIECE			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
3RD ANGLE PROJECTION										
TITLE TERMINAL SHROUD 4P 100-200A OUTLINE										
	/ I i+	tol	fuse	REVISION	DRWG NO.	SHEET	1 OF 1			
Littelfuse CHICAGO, ILLINOIS 60631			Α	OL-LDM	3CU13					