
	REVISION						
REV	DATE	DESCRIPTION					
Α	8/10/22	525528GCP - RELEASE MRY					

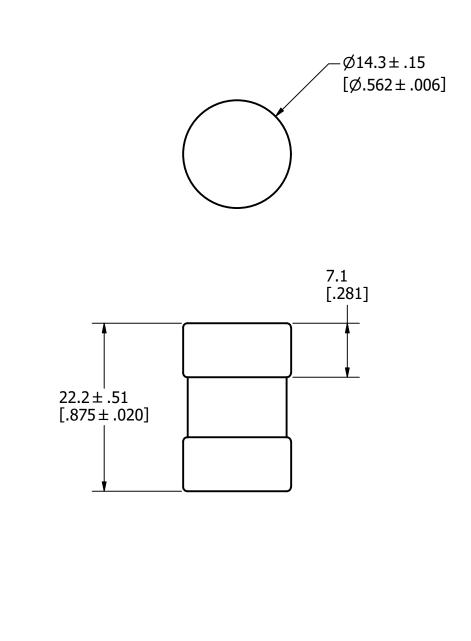

APPROXIMATE SHIPPING WEIGHT: 10 FUSES / 0.22 LBS.

1 NO			DESCRIPTION		QTY/M	U/M				
BILL OF MATERIAL										
<s> CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE</s>										
	•	DENOTES CRITICAL CHARACTERISTICS.								
(	СРК	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE								
<	ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.								
CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.							A			
MATL	SPEC			FINISH	FINISH					
DRW JMoler			DATE 7/29/2022	SCALE NTS			FINISH GOOD WT GRAMS/PIECE			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
	3RD ANGLE PROJECTION									
TITLI	TITLE JLLN 35-60A OUTLINE									
		talfuca®		REVISION	DRWG NO.	SHEE	T 1 OF 1			
<b>Littelfuse</b> CHICAGO, ILLINOIS 60631				А	OL-JLLN	060				