
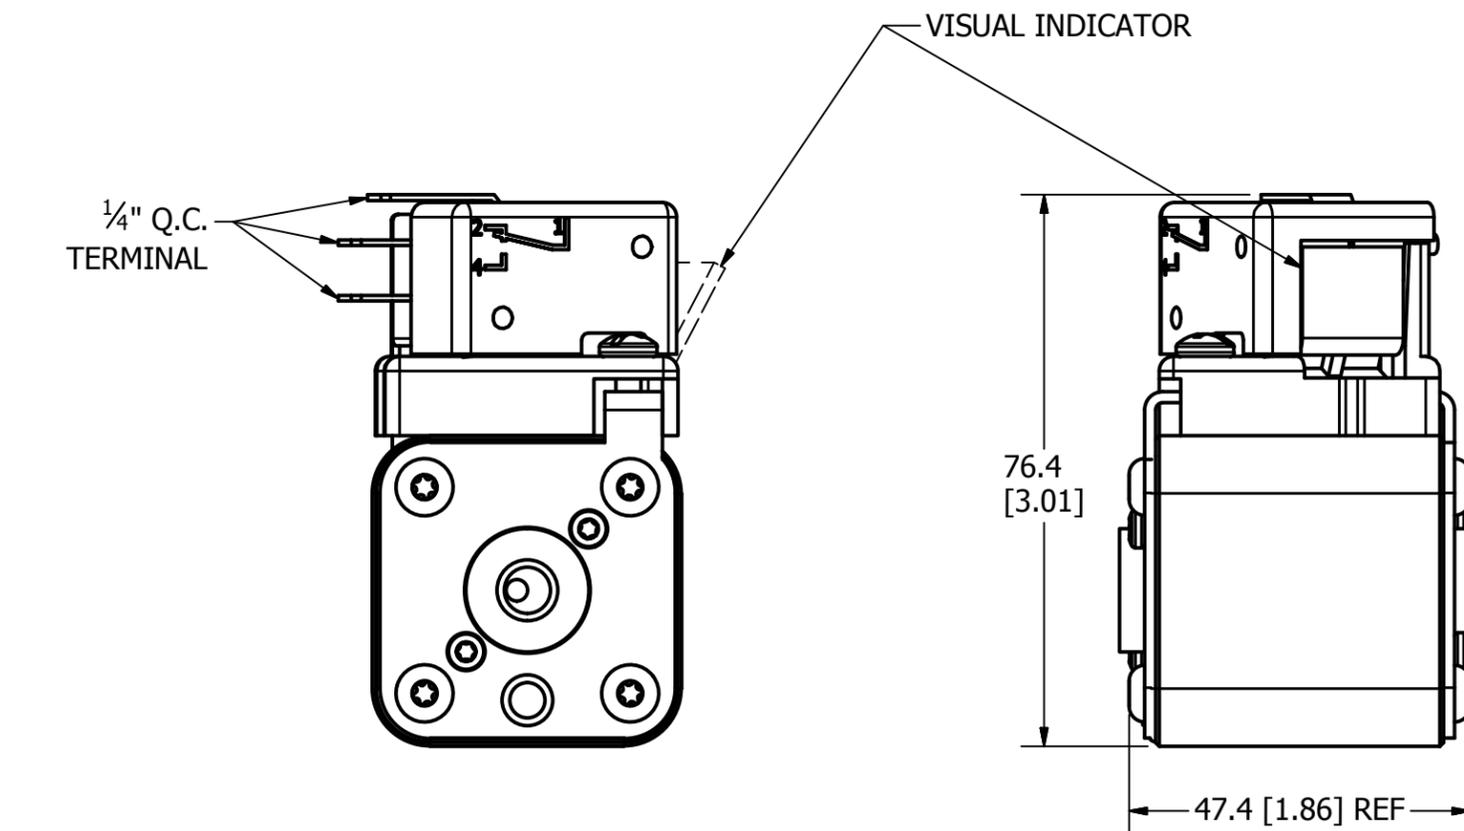
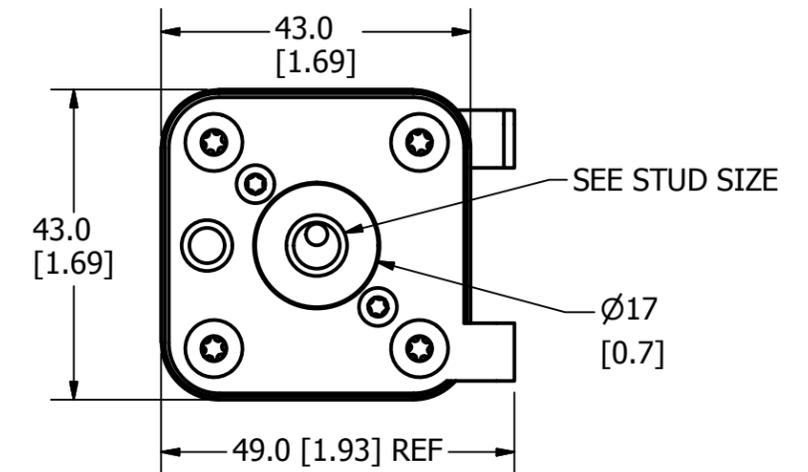
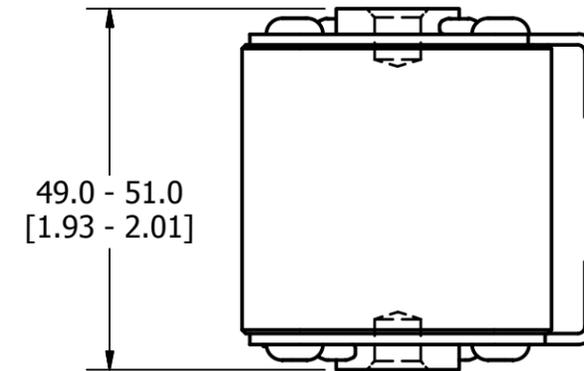
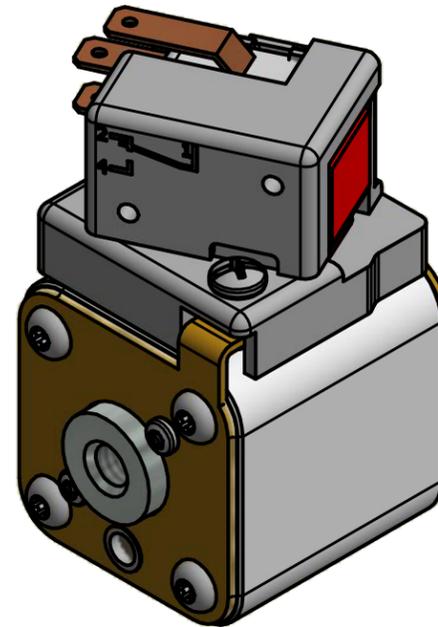


**MOUNTING SPECS:**

STUD SIZE: 5/16-18 UNC-2B  $\nabla$  6.0[0.24]

STUD TORQUE: 13-20Nm

| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                                |
| A        | 03/16/2017 | 517373GCP - RELEASED -TV                   |
| B        | 10/19/2017 | 518344ECP - REVISE MOUNTING SPEC NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY          |

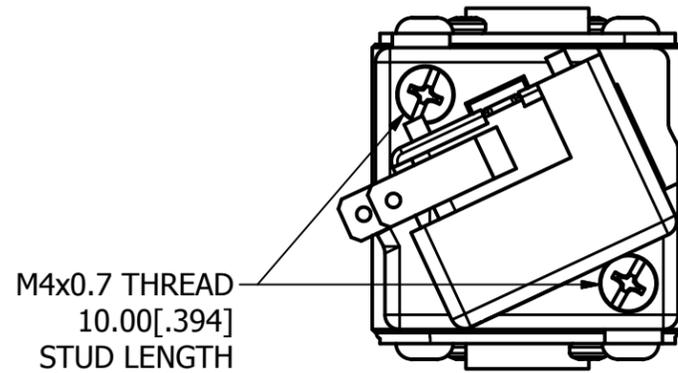


FUSE WITH MICROSWITCH

|     |  |
|-----|--|
| ●   | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| ⬡   | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP  | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |

**B**

|                 |                   |              |                               |
|-----------------|-------------------|--------------|-------------------------------|
| MATL SPEC       |                   | FINISH       |                               |
| DRW<br>TVESELSK | DATE<br>11/6/2013 | SCALE<br>NTS | FINISH GOOD WT<br>GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994







**TITLE** SQUARE BODY 30 CASE SIZE - ENGLISH THREAD OUTLINE

|                             |          |                 |              |
|-----------------------------|----------|-----------------|--------------|
| <br>CHICAGO, ILLINOIS 60631 | REVISION | DRWG NO.        | SHEET 1 OF 1 |
|                             | C        | OL-PSR030FS0000 |              |

| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                                |
| A        | 08/11/2017 | 518016GCP - RELEASED -TV                   |
| B        | 10/19/2017 | 518344ECP - REVISE MOUNTING SPEC NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY          |

MOUNTING SPECS:  
 STUD SIZE: 5/16-18 UNC-2B  $\nabla$  8.0[0.31]  
 STUD TORQUE: 13-20Nm

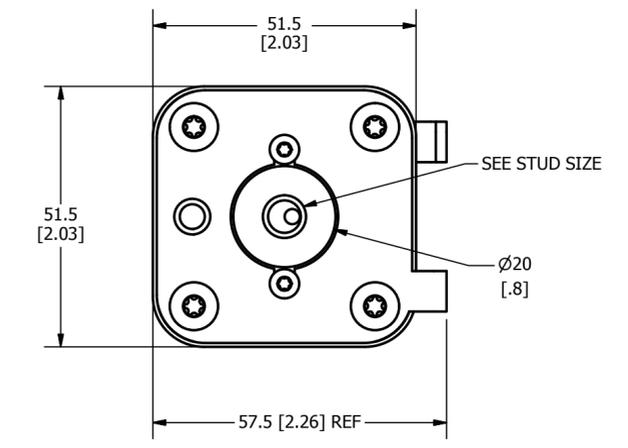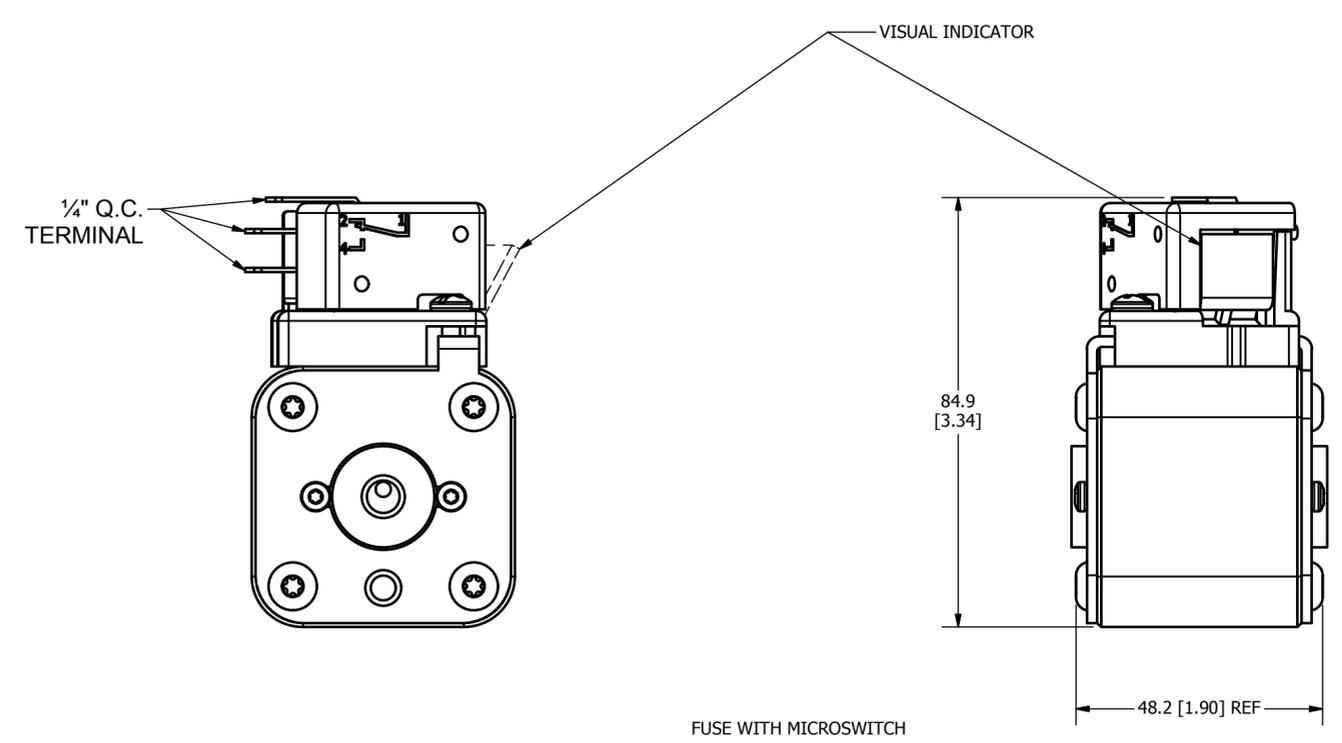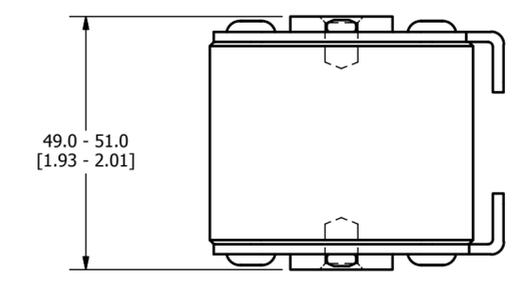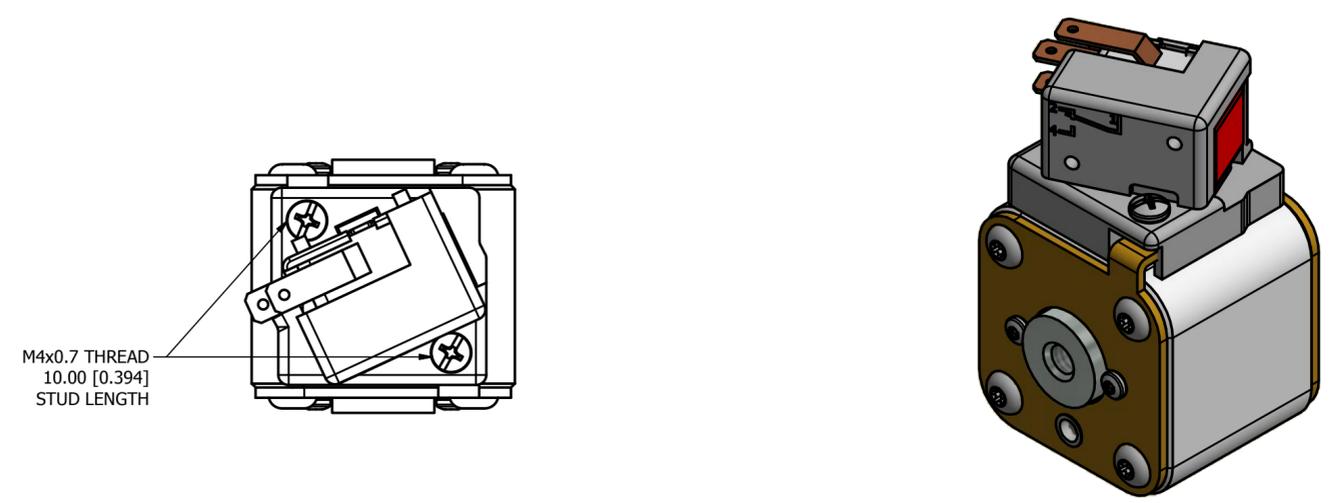

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |

|              |                |           |                            |
|--------------|----------------|-----------|----------------------------|
| MATL SPEC    | FINISH         |           |                            |
| DRW TVESELSK | DATE 6/30/2017 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994







TITLE SQUARE BODY 31 CASE SIZE - ENGLISH THREAD OUTLINE


| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                                |
| A        | 03/16/2016 | 518344GCP - RELEASED -TV                   |
| B        | 10/19/2017 | 518344ECP - REVISE MOUNTING SPEC NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY          |

MOUNTING SPECS:

STUD SIZE: 3/8-16 UNC-2B  $\nabla$  11.5 [0.45]  
 STUD TORQUE: 26-35Nm

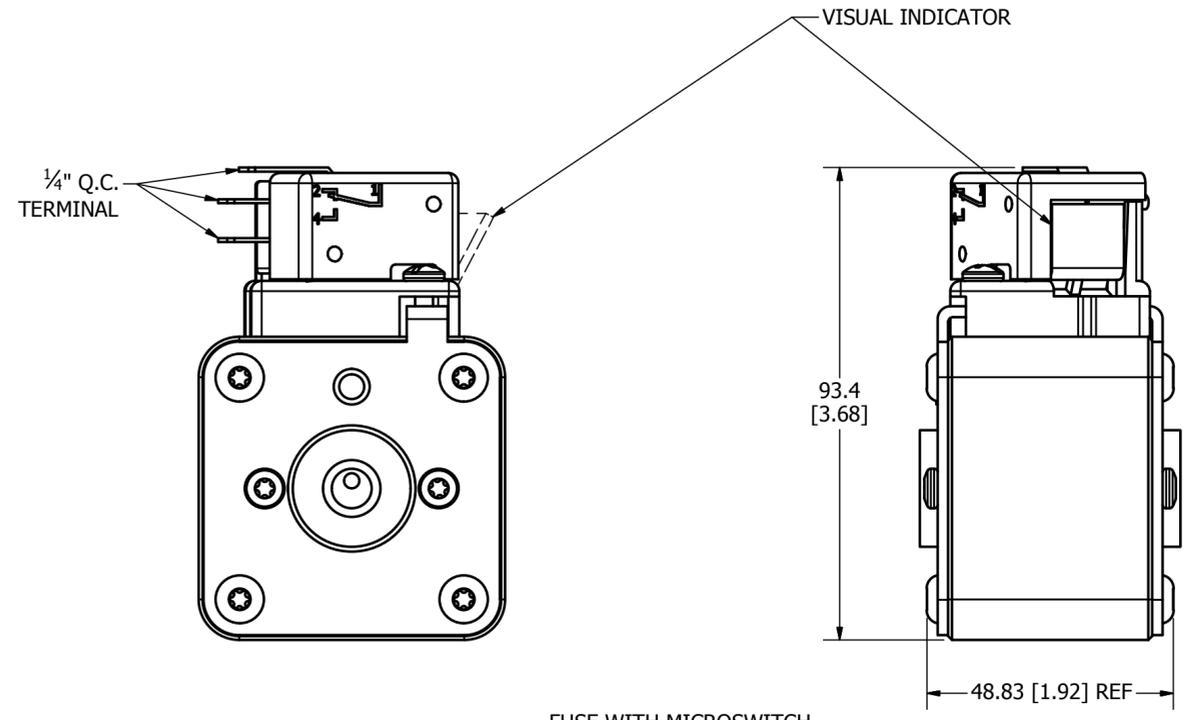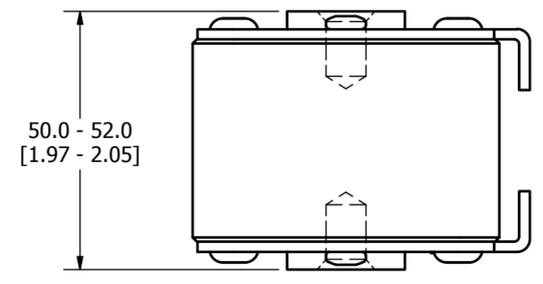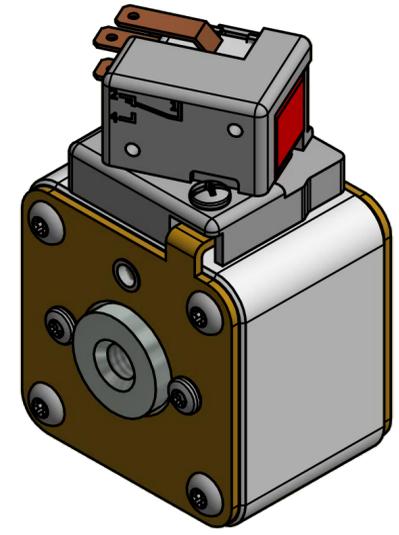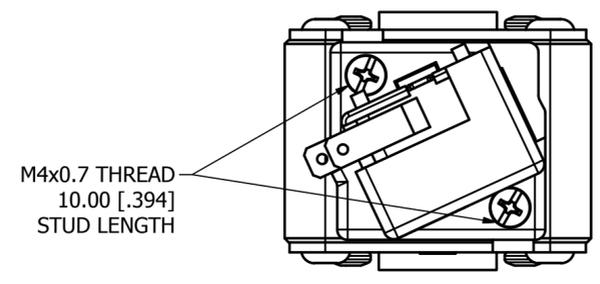


FUSE WITH MICROSWITCH

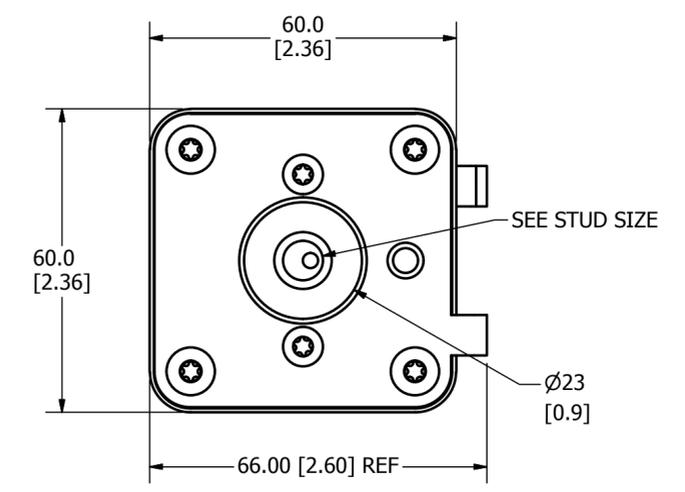

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |

|              |                |           |                            |
|--------------|----------------|-----------|----------------------------|
| MATL SPEC    | FINISH         |           |                            |
| DRW TVESELSK | DATE 11/6/2013 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994








TITLE SQUARE BODY 32 CASE SIZE - ENGLISH THREAD OUTLINE

| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                            |
| A        | 03/16/2016 | 517373GCP - RELEASED -TV               |
| B        | 10/19/2017 | 518344ECP - REVISE STUD SIZE NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY      |

**MOUNTING SPECS:**

STUD SIZE: 1/2-13 UNC - 2B  $\nabla$ 13.0[0.51]

STUD TORQUE: 45-55Nm

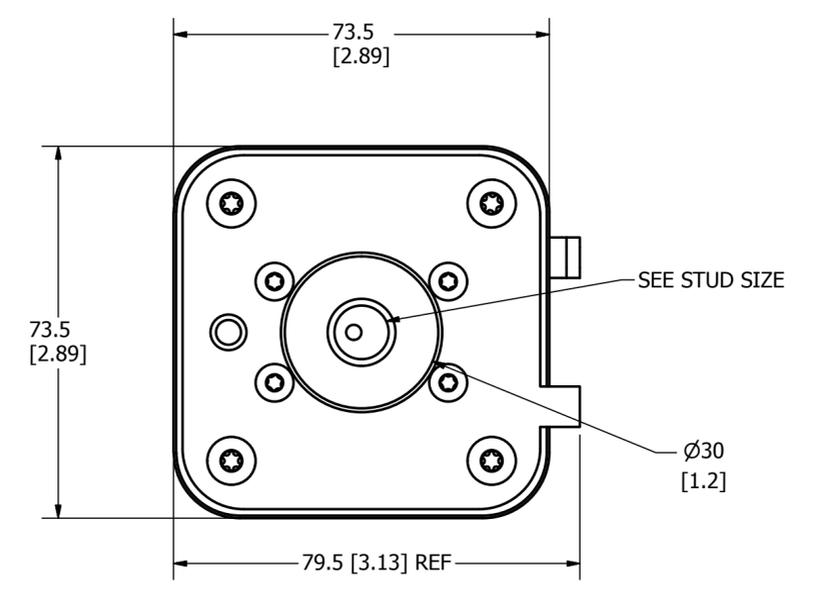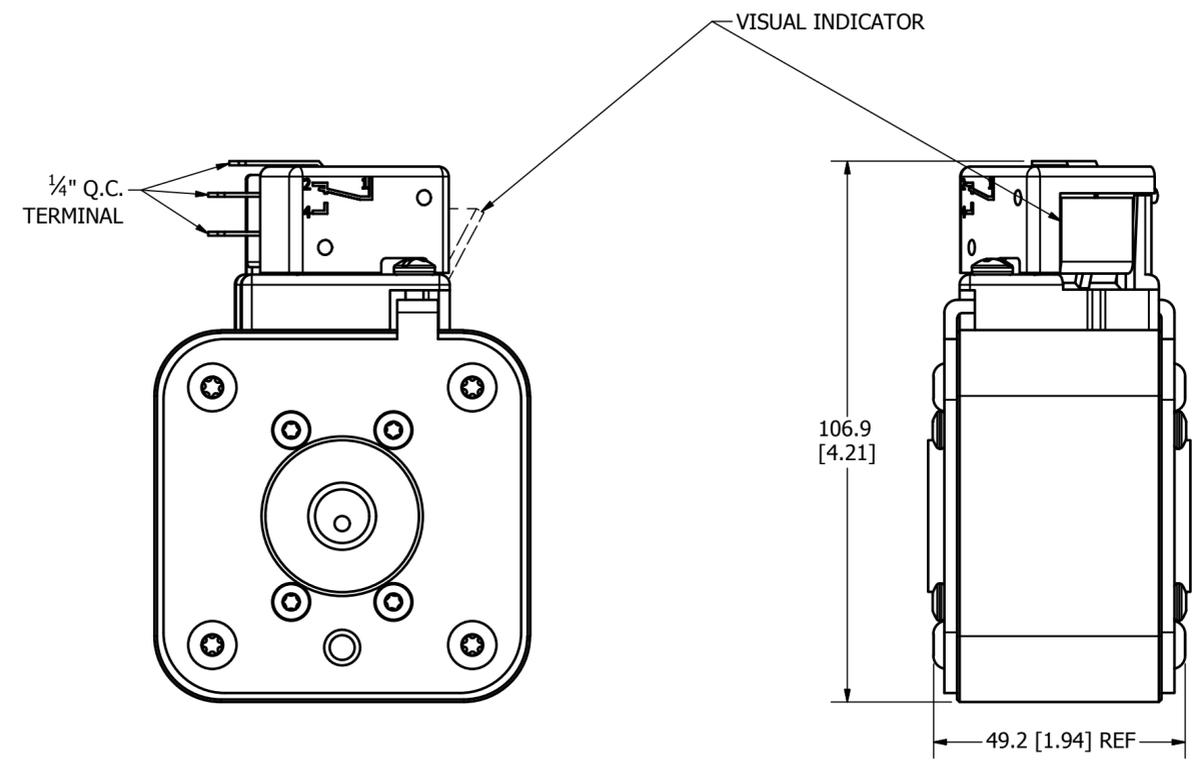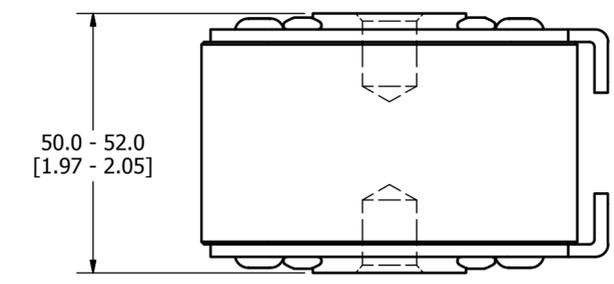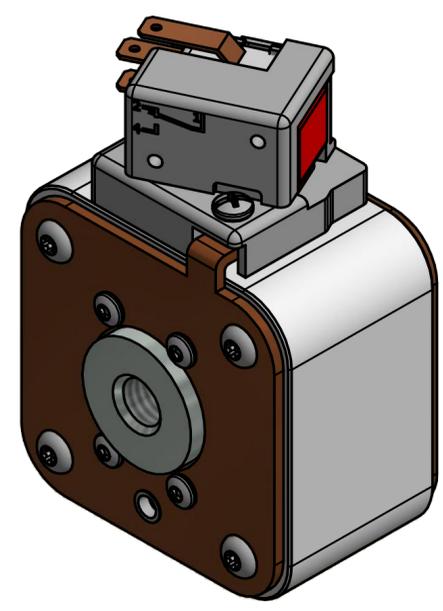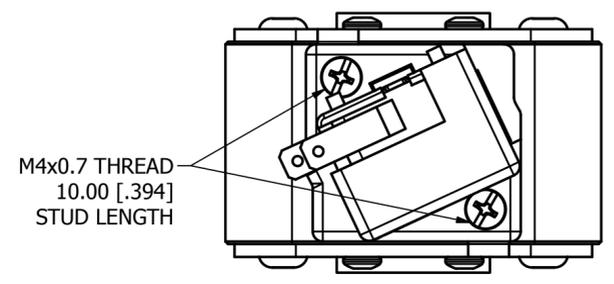

FUSE WITH MICROSWITCH


|   |  |              |                            |
|---|--|--------------|----------------------------|
| ●   | DENOTES CRITICAL CHARACTERISTICS.  |              |                            |
| CPK   | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |              |                            |
| (ST)  | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |              |                            |
| CP  | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |              |                            |
| MATL SPEC   | FINISH   |              |                            |
| DRW TVESELSK  | DATE 11/6/2013   | SCALE NTS    | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 |  |              |                            |
| 3RD ANGLE PROJECTION  |  |              |                            |
| TITLE SQUARE BODY 33 CASE SIZE - ENGLISH THREAD OUTLINE   |  |              |                            |
|   |  | REVISION C   | DRWG NO. OL-PSR033FS0000   |
|   |  | SHEET 1 OF 1 |                            |

| REVISION |            |                                   |
|----------|------------|-----------------------------------|
| REV      | DATE       | DESCRIPTION                       |
| A        | 01/10/2018 | 518685GCP - RELEASED -TV          |
| B        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY |



MOUNTING SPECS

STUD SIZE: 5/16-18 UNC-2B  $\nabla$  6.0 [0.24]


STUD TORQUE: 13-20Nm

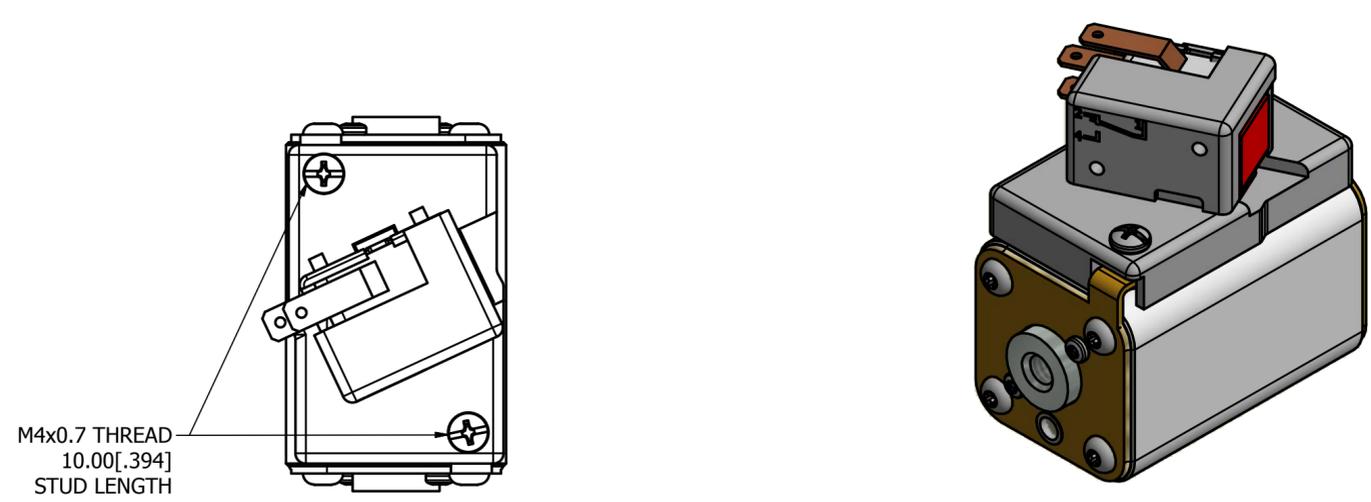

M4x0.7 THREAD  
10.00 [.394]  
STUD LENGTH

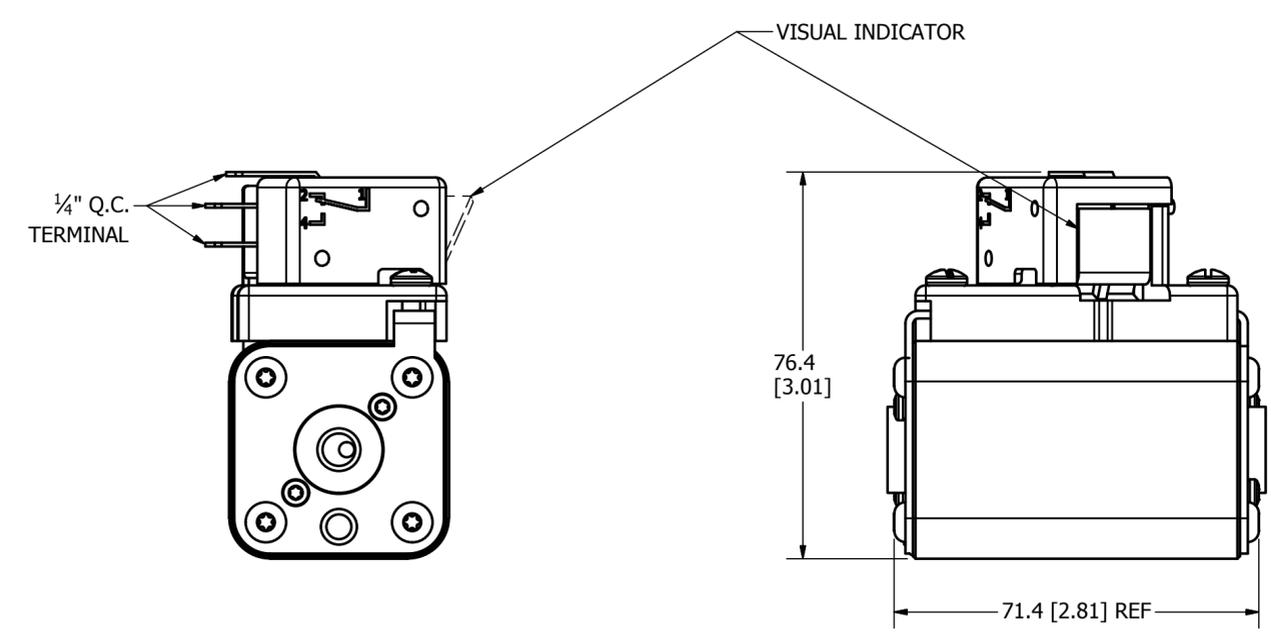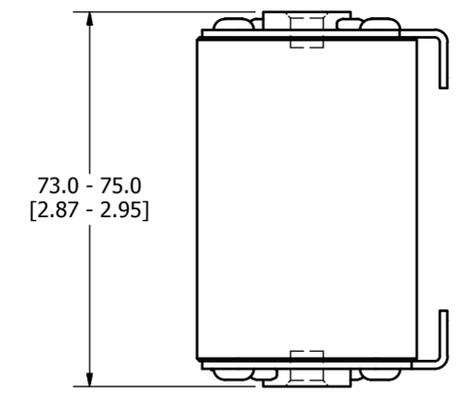


FUSE WITH MICROSWITCH

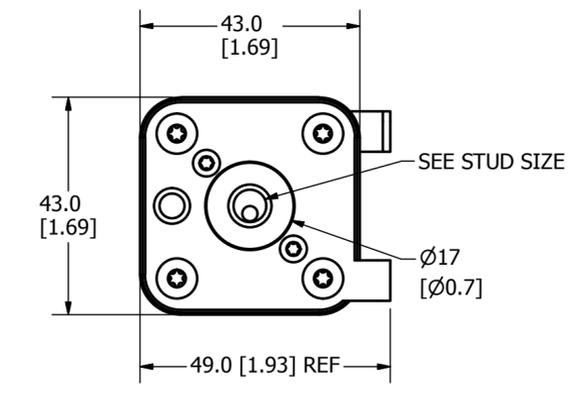

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |

|              |                |           |                            |
|--------------|----------------|-----------|----------------------------|
| MATL SPEC    | FINISH         |           |                            |
| DRW TVESELSK | DATE 11/6/2013 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994







TITLE SQUARE BODY 70 CASE SIZE - ENGLISH THREAD OUTLINE

| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                                |
| A        | 03/16/2016 | 518344GCP - RELEASED -TV                   |
| B        | 10/19/2017 | 518344ECP - REVISE MOUNTING SPEC NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY          |


**MOUNTING SPECS**

STUD SIZE: 5/16-18 UNC-2B  $\nabla$  8.0[0.31]

STUD TORQUE: 13-20Nm

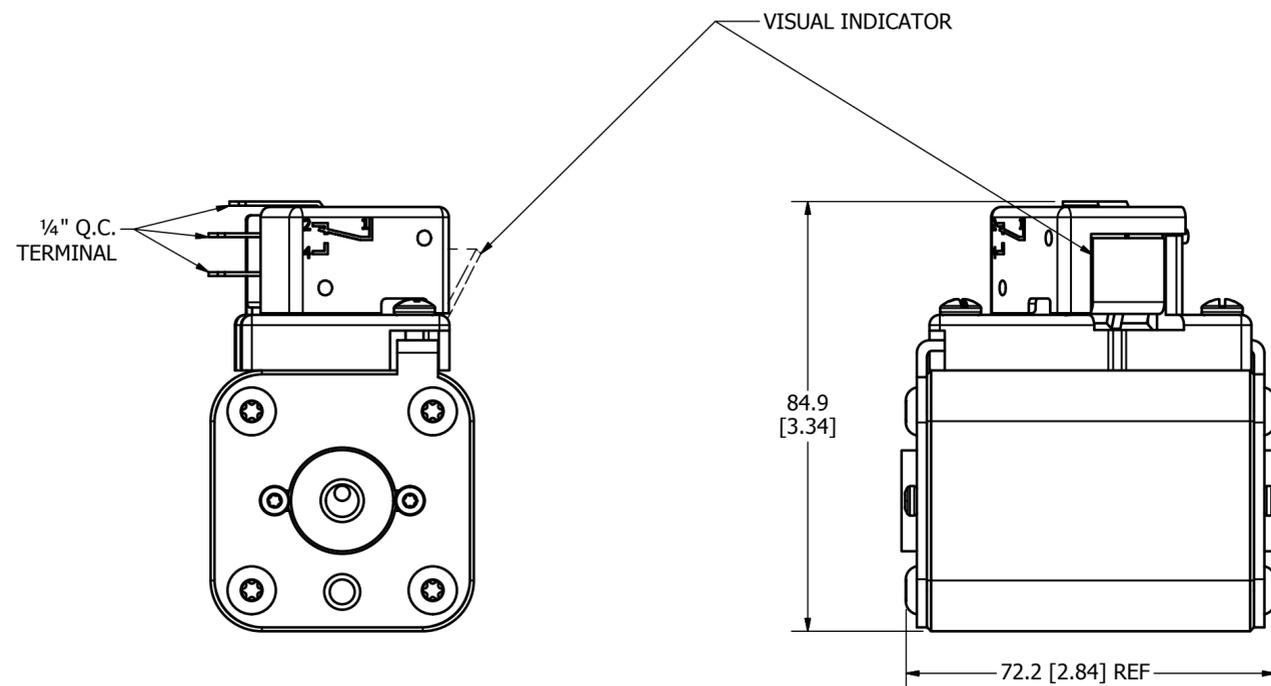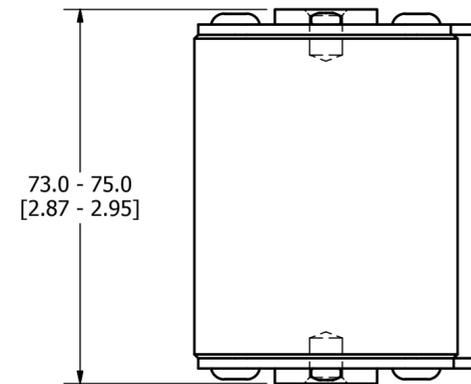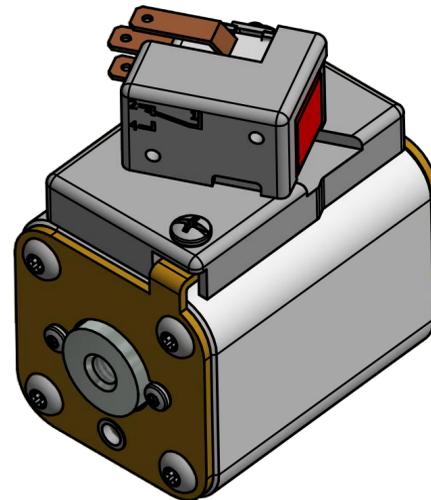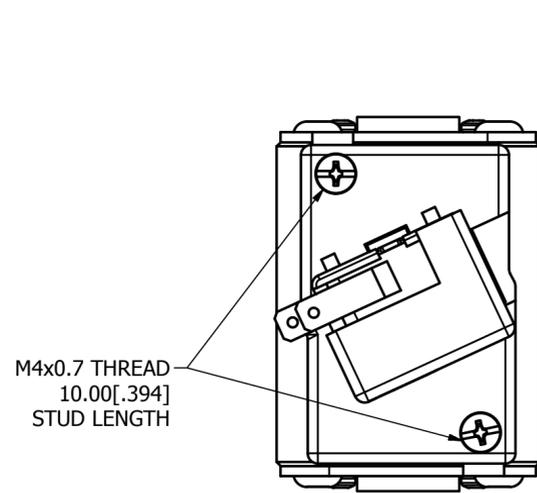


FUSE WITH MICROSWITCH

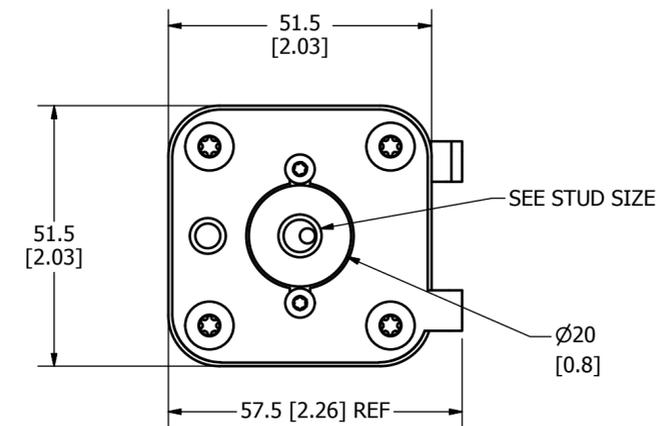

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |

|              |                |           |                            |
|--------------|----------------|-----------|----------------------------|
| MATL SPEC    | FINISH         |           |                            |
| DRW TVESELSK | DATE 11/6/2013 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994








TITLE SQUARE BODY 71 CASE SIZE - ENGLISH THREAD OUTLINE

| REVISION |            |  |
|----------|------------|--|
| REV      | DATE       | DESCRIPTION                            |
| A        | 03/16/2016 | 517373GCP - RELEASED -TV               |
| B        | 10/19/2017 | 518344ECP - REVISE STUD SIZE NOTES -TV |
| C        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY      |

**MOUNTING SPECS:**

STUD SIZE: 3/8-16 UNC-2B  $\nabla$ 11.5[0.45]

STUD TORQUE: 26-35Nm

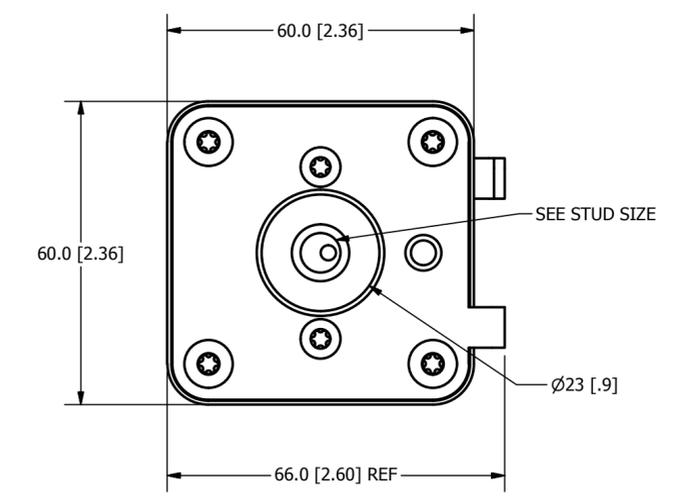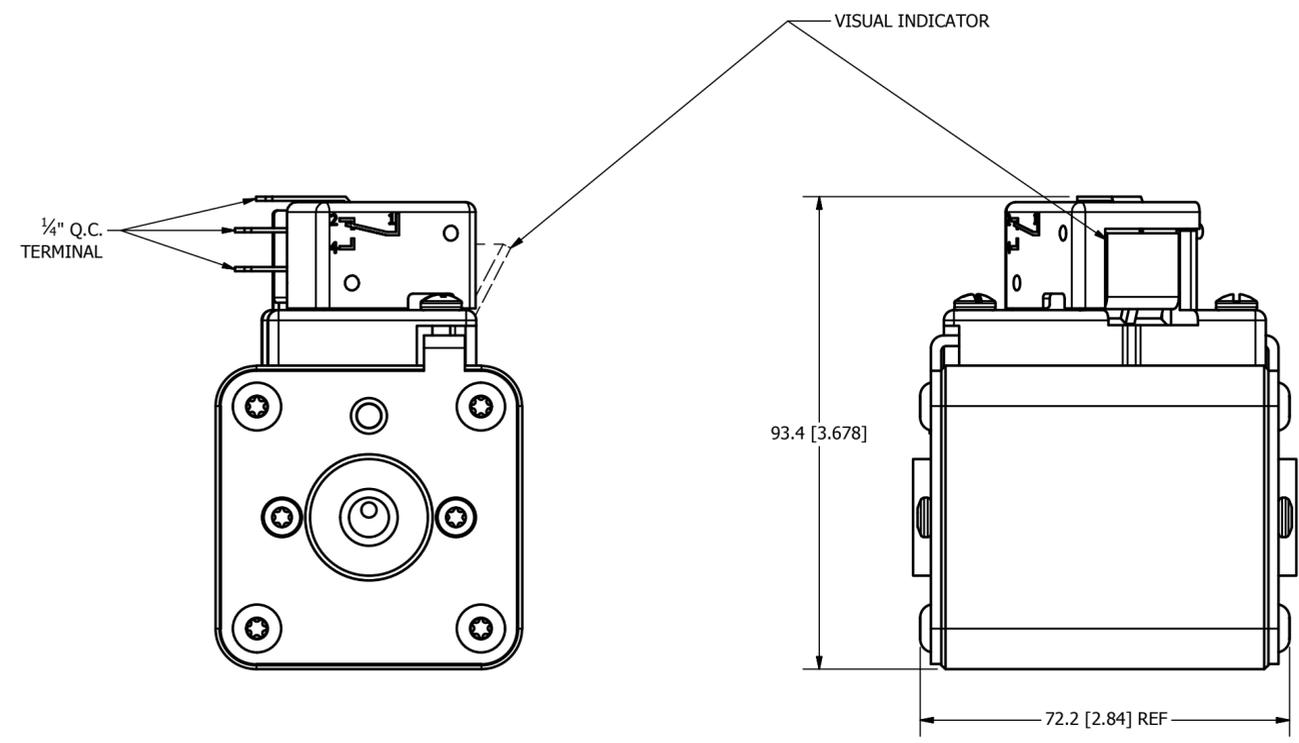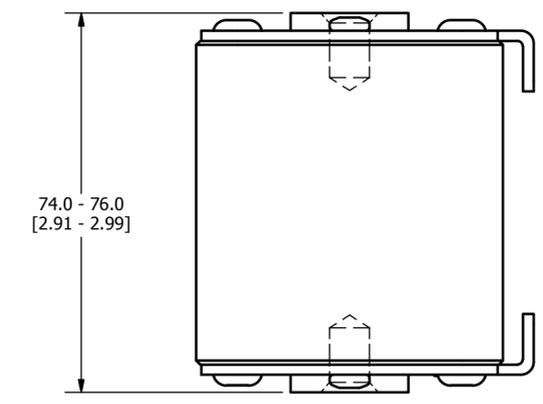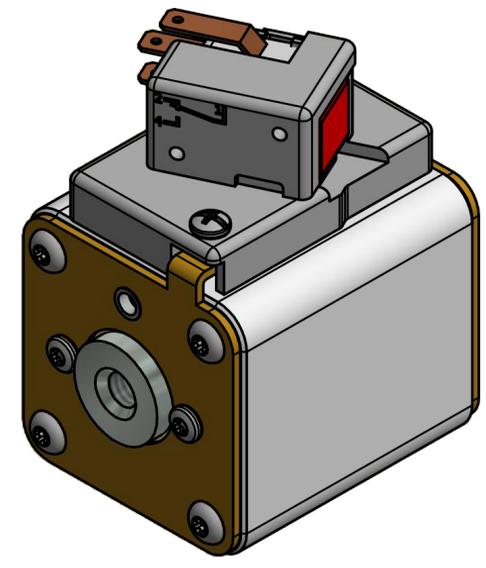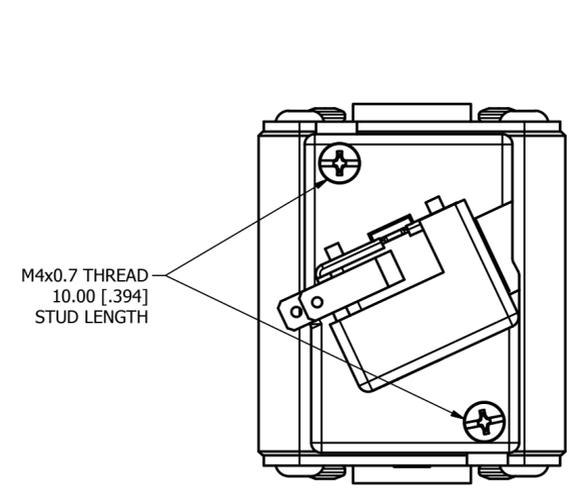


FUSE WITH MICROSWITCH

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |

|              |                |           |                            |
|--------------|----------------|-----------|----------------------------|
| MATL SPEC    | FINISH         |           |                            |
| DRW TVESELSK | DATE 2/15/2016 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994






TITLE SQUARE BODY 72 CASE SIZE - ENGLISH THREAD OUTLINE

| REVISION |            | DESCRIPTION                       |
|----------|------------|-----------------------------------|
| REV      | DATE       |                                   |
| A        | 01/10/2018 | 518685GCP - RELEASED -TV          |
| B        | 8/30/18    | 519782ECP/D - CHG STUD TORQUE MRY |


**MOUNTING SPECS:**

STUD SIZE: 1/2-13 UNC - 2B  $\nabla$ 13.0 [0.51]

STUD TORQUE: 45-55Nm

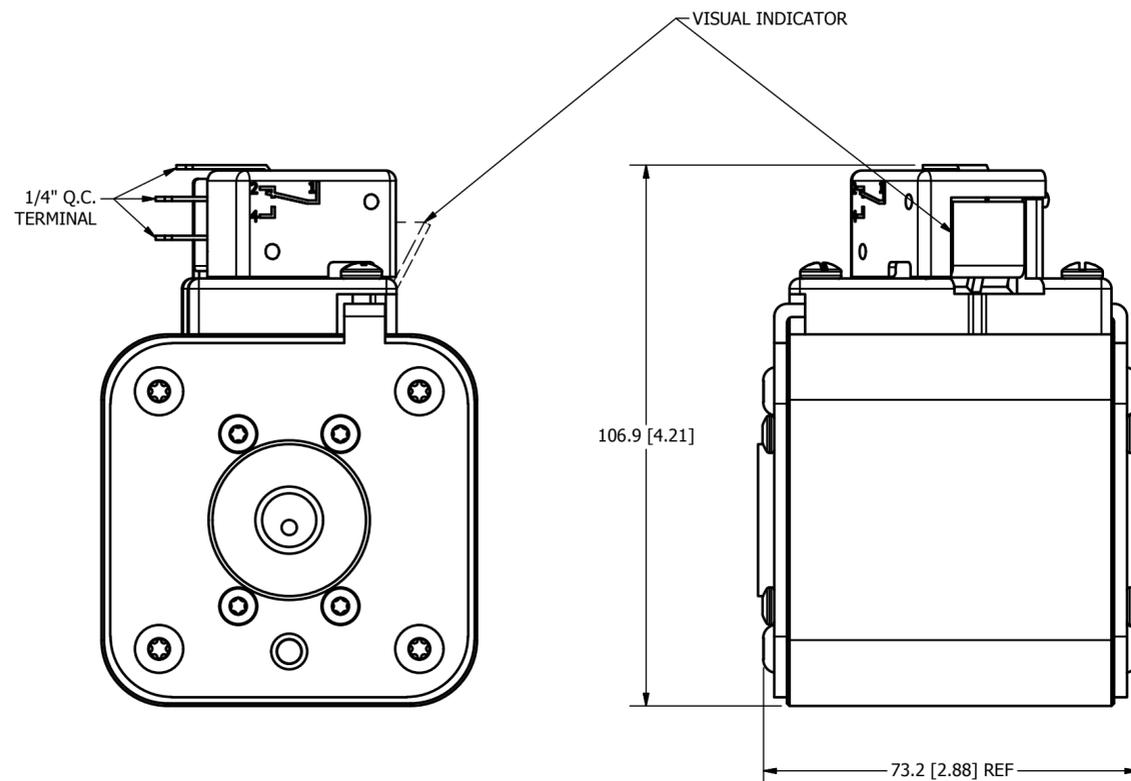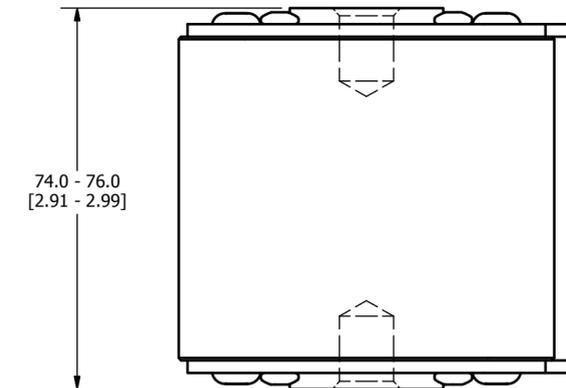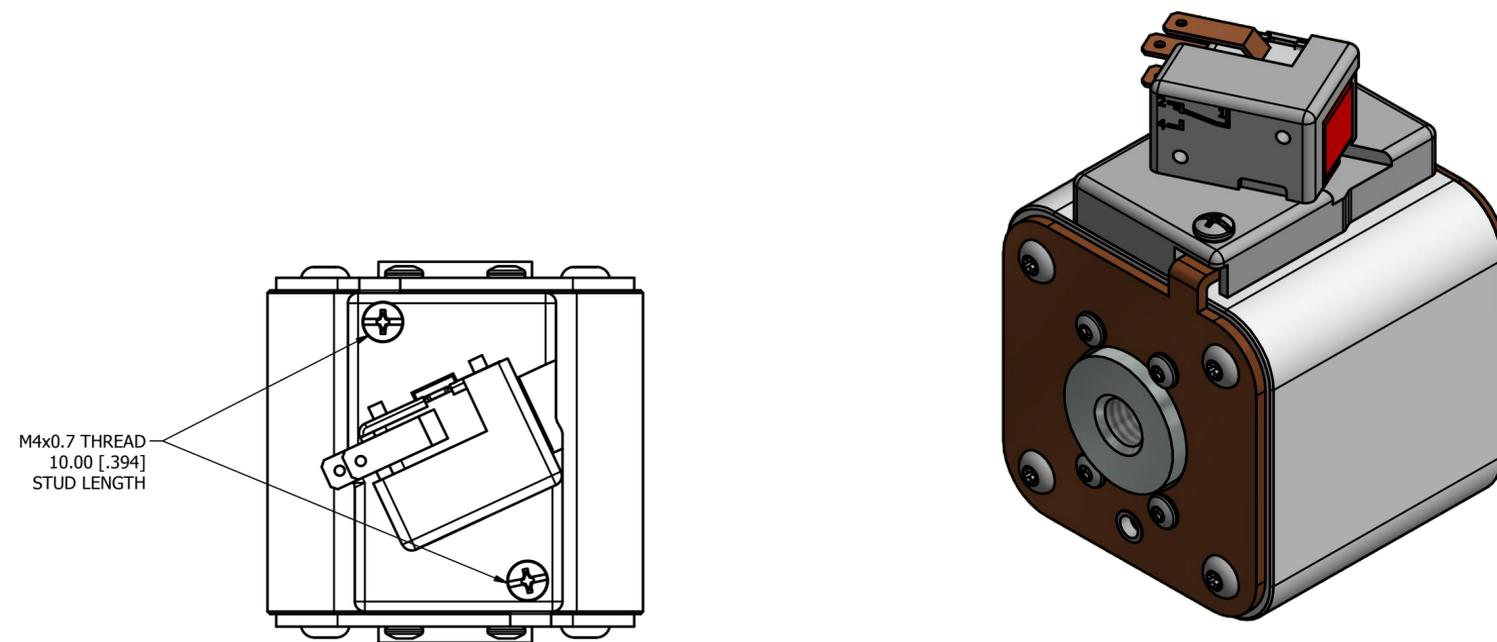


FUSE WITH MICROSWITCH

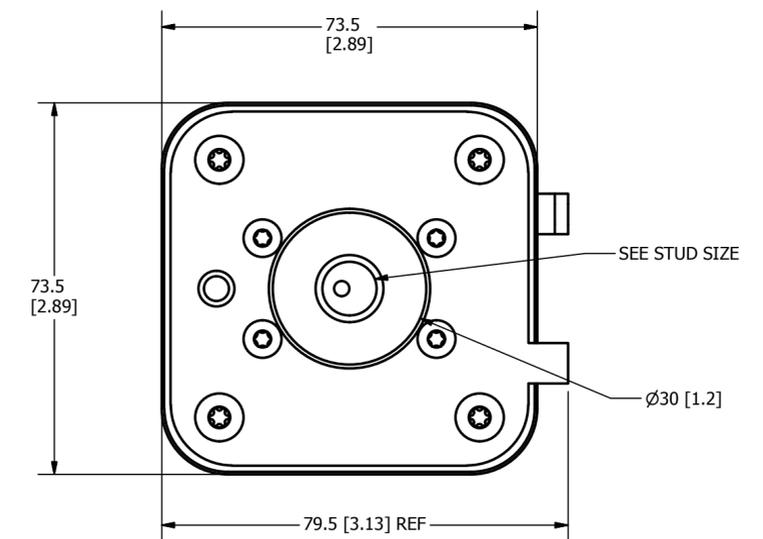

|      |  |
|------|--|
| ●    | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP   | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE. MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.              |

|              |               |           |                            |
|--------------|---------------|-----------|----------------------------|
| MATL SPEC    | FINISH        |           |                            |
| DRW TVESELSK | DATE 2/4/2016 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994



TITLE SQUARE BODY 73 CASE - ENGLISH THREAD OUTLINE

|  |            |                          |              |
|--|------------|--------------------------|--------------|
| <b>Littelfuse</b><br>CHICAGO, ILLINOIS 60631 | REVISION B | DRWG NO. OL-PSR073FS0000 | SHEET 1 OF 1 |
|--|------------|--------------------------|--------------|