
REVISION				
REV	DATE	DESCRIPTION		
Α	8/9/22	525545GCP - RELEASE MRY		

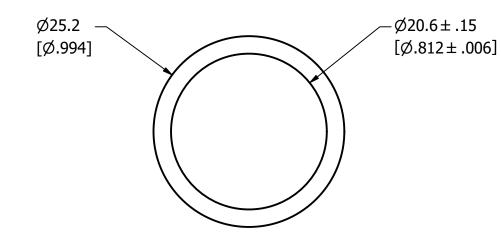

APPROXIMATE SHIPPING WEIGHT: 10 FUSES / 0.84 LBS.

	10.3 [.406]
39.7±1.02 [1.562±.040]	
<u>, </u>	1.6 [.062]

1										
NO	NO COMPONENT NO		DESCRIPTION		QTY/M	U/M				
BILL OF MATERIAL										
_ <	<s></s>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE								
•		DENOTES CRITICAL CHARACTERISTICS.								
СРК		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE								
(ডা)		DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.								
СР		DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.								
MATL	SPEC			FINISH						
DRW			DATE	SCALE	FINISH GOOD WT					
JMole	r	{3	/3/2022	NTS	GRAMS/PIECE					
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
	O ANGLE DJECTION									
(
TITL	JLLS 35-60A OUTLINE									
	74 = ==	Lal	C ® RE	VISION DRWG NO.	SHEET	Г 1 OF 1				

A OL-JLLS060