
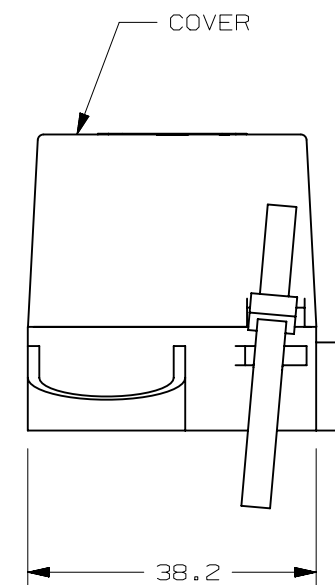


E F

A	01/12/09	000566ER-RELEASE GMB		
B	20/APR/19	520661ECA-REMOVE NOTE 5 OPL		

1. COVER RETENTION TEST: MINIMUM FORCE OF 2 LBS. REQUIRED TO REMOVE COVER WHEN IT IS SUSPENDED UPSIDE DOWN. FORCE SHALL BE APPLIED THROUGH THE INNER HOLES (2) IN BASE. USE FIXTURE #T-C403 TO SUPPORT PART.
2. TORQUE REQUIREMENTS FOR THE HEX NUT USED TO SECURE THE CUSTOMER RING TERMINAL TO THE MEGA FUSE TO BE:
6mm NUT - 12-18 NEWTON METERS (106-159 IN-LBS)
3. HOLDER MEETS L/F VALIDATION TEST SPEC. VS-005002.
4. MATERIALS:
 - * BODY - GLASS FILLED THERMOPLASTIC
COLOR - BLACK
 - * COVER - THERMOPLASTIC
COLOR - BLACK
 - * WIRE TIE - THERMOPLASTIC
COLOR - BLACK
 - * STUDS & NUTS - M8 X 1.25 STEEL
ZINC PLATE WITH TRIVALENT CHROMATE, LEACHED AND SEALED.
INTEGRAL TORQUE CONTROL LUBRICANT FINISH.
(MEETS 96 HR. ASTM STD. B-117 SALT SPRAY REQ.)

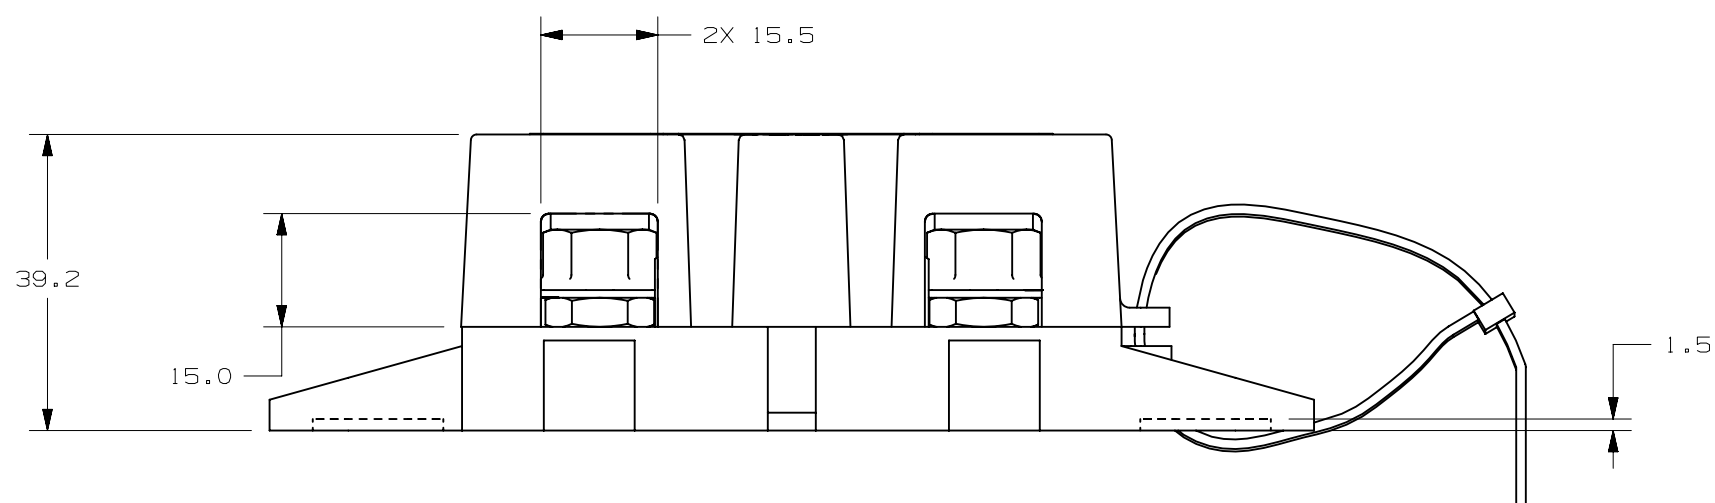

DES PLAINES, ILLINOIS 60016

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [] ARE INCHES				
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.				
		DENOTES CRITICAL CHARACTERISTICS.		
CPK		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
		DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS		
CP		DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE		
COPIES TO		MATL SPEC		
1	9	18		
2	10	19		
3	12	20		
4	13	21		
5	14	23	FINISH	
6	15	33	DRW GMB	
7	16	43	DATE 01/12/09	
8	17	53	SCALE 1:1	
CHK			DATE	
APPD			SUPER DR	
			FINISH GOOD WT	
GRAMS/PIECE				
TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-mkl)				
DIMENSION	0.5 - UP TO 3	OVER 3 - 6	OVER 6 - 30	OVER 30 - 120
TOLERANCE	±0.1	±0.1	±0.2	±0.3
3RD ANGLE PROJECTION		TITLE		
		MEGAFUSE HOLDER		
		[REVISION] DRWG. NO.		
DES. PLAINES, ILLINOIS 60016		B 02981026ZXT		

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED