

	REVISION							
	REV	DATE	DESCRIPTION					
	Α	1/16/18	518725GCP - RELEASE PER EM2929 MRY					
	В	3/31/22	524923ECP/D - ADD TOLERANCES MRY					

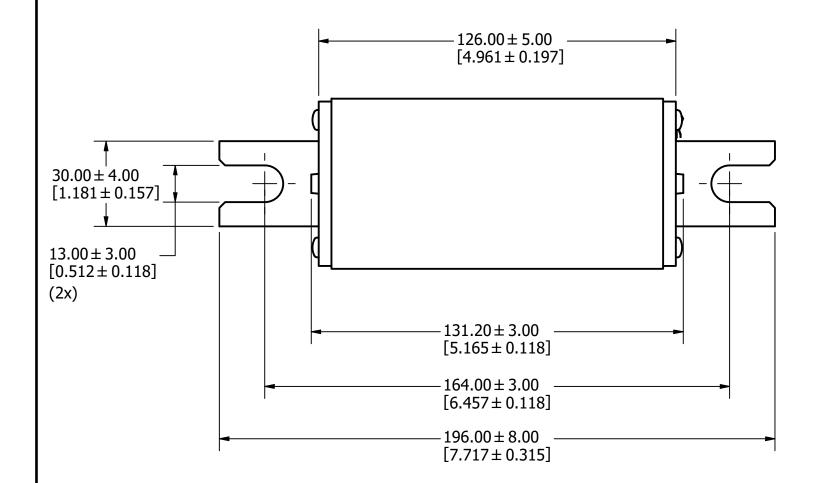

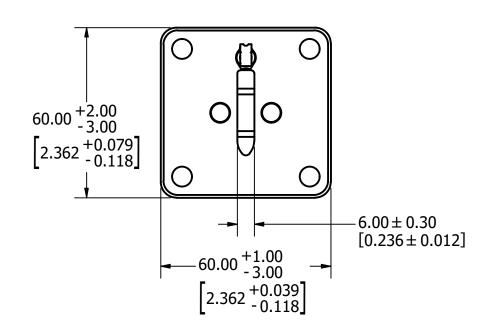

•	DENOTES CRITICAL CHARACTERISTICS.					
СРК	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE					
<u>(ST)</u>	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.					
СР	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.					
MATL SPEC			FINISH			
DRW MYORK		DATE 9/18/2017	SCALE NTS	FINISH GOOD WT GRAMS/PIECE		
LINESCO OTHERWISE CRECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN						

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION

TITLE

1500VDC SIZE 2XLW/ U-BLADE PHOTOVOLTAIC FUSE OUTLINE



REVISION DRWG NO.

OL-SPNH000.X2XLDE