
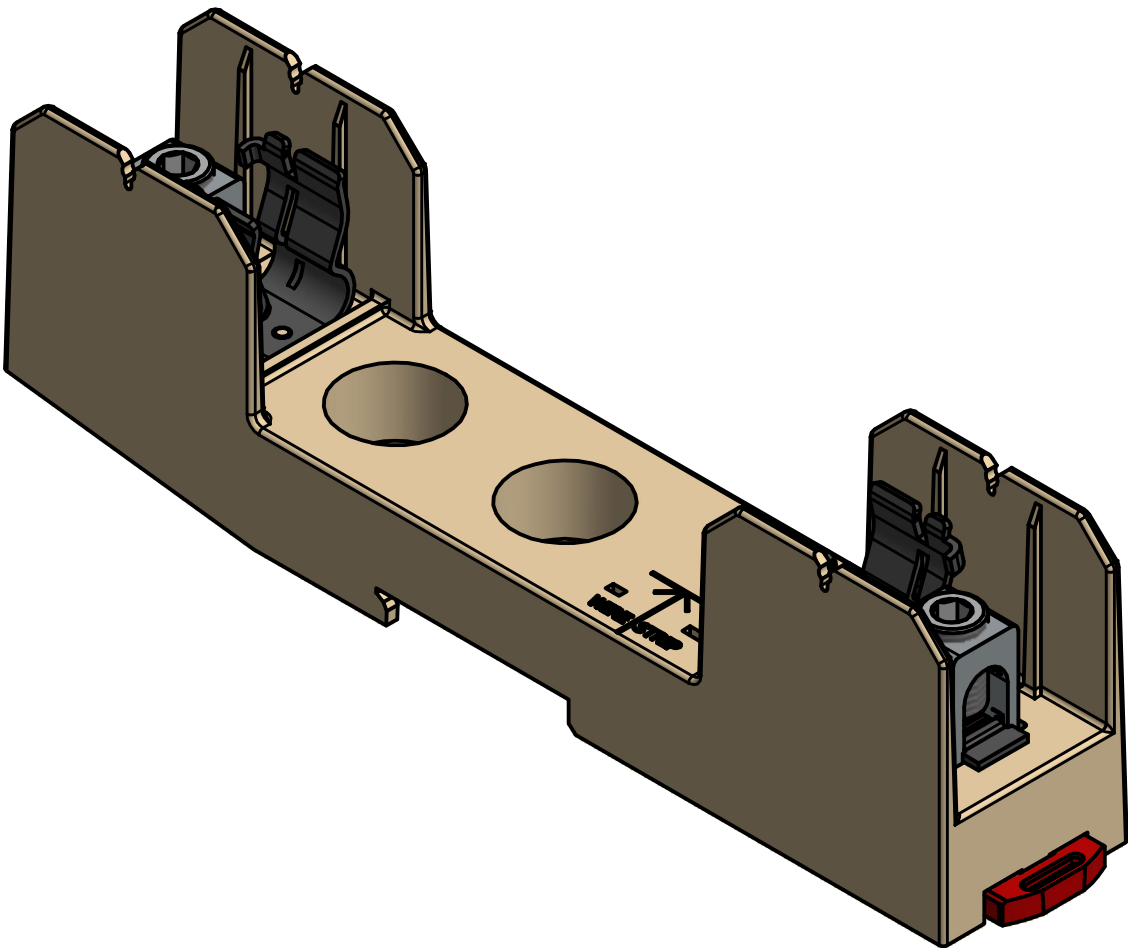


REVISION		
REV	DATE	DESCRIPTION
A	11/2/20	523009GCP - RELEASE MRY
B	9/23/21	524232ECP/C - UPDATE TO NEW DESIGN MRY
C	11/9/21	524457ECP/D - ROTATE DIMENSIONS MRY
D	5/23/22	525242ECP/D - ADD TOLERANCES MRY

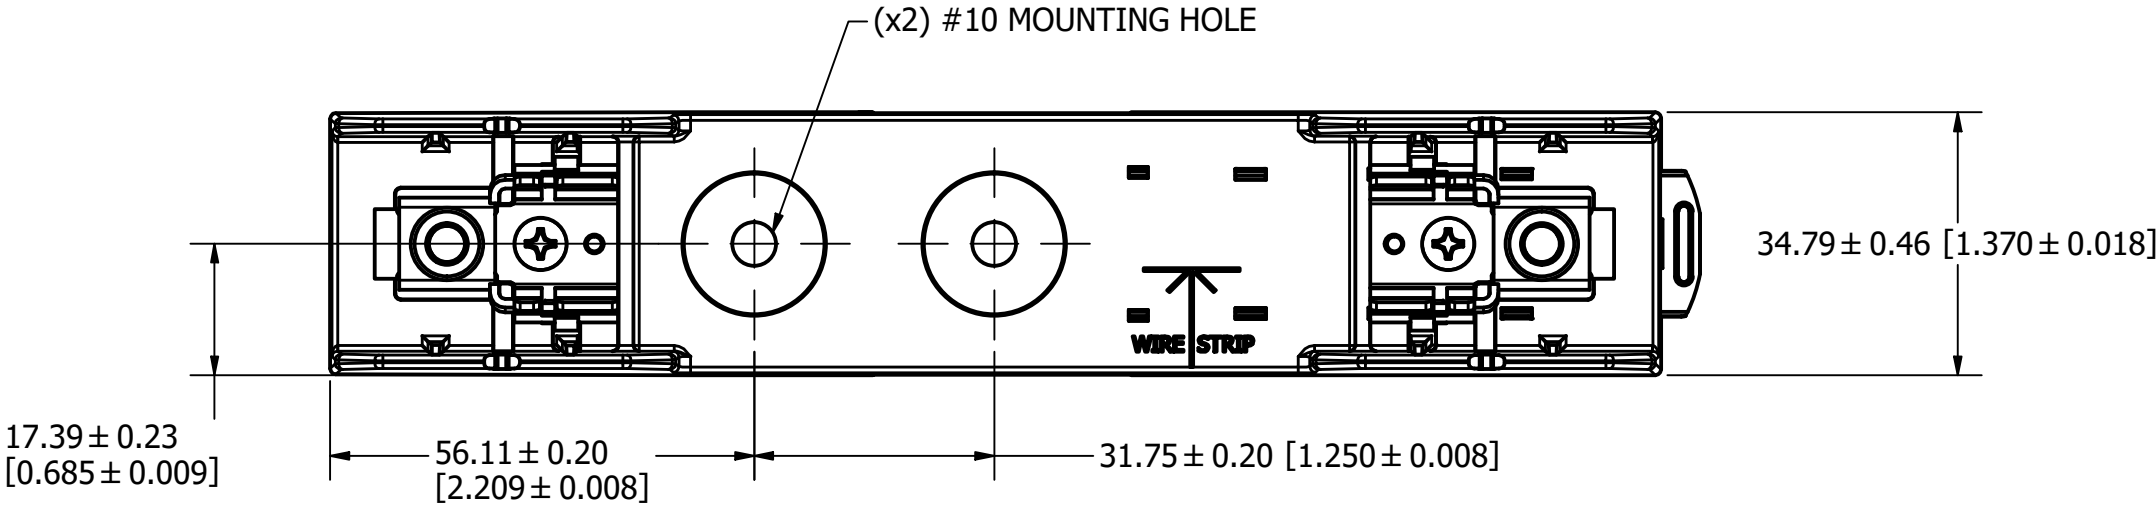

SPECIFICATIONS

VOLTAGE RATING: 1500VDC

AMPERE RATING: 60 AMPERES

INTERRUPT RATING: 50kA



TERMINAL TYPE: BOX LUG



SUGGESTED TORQUE: 2-4 AWG 5.6 N-m (50 IN-LBS)
6-14 AWG 2.8 N-m (25 IN-LBS)

FLAT BUSBAR
3.18-6.35 mm 2.8 N-m
[0.125-0.250 in 25 IN-LB]

WIRE RANGE: 2-14 AWG STRANDED Cu ONLY

APPROVALS: UL LISTED (FILE NO. E345481)

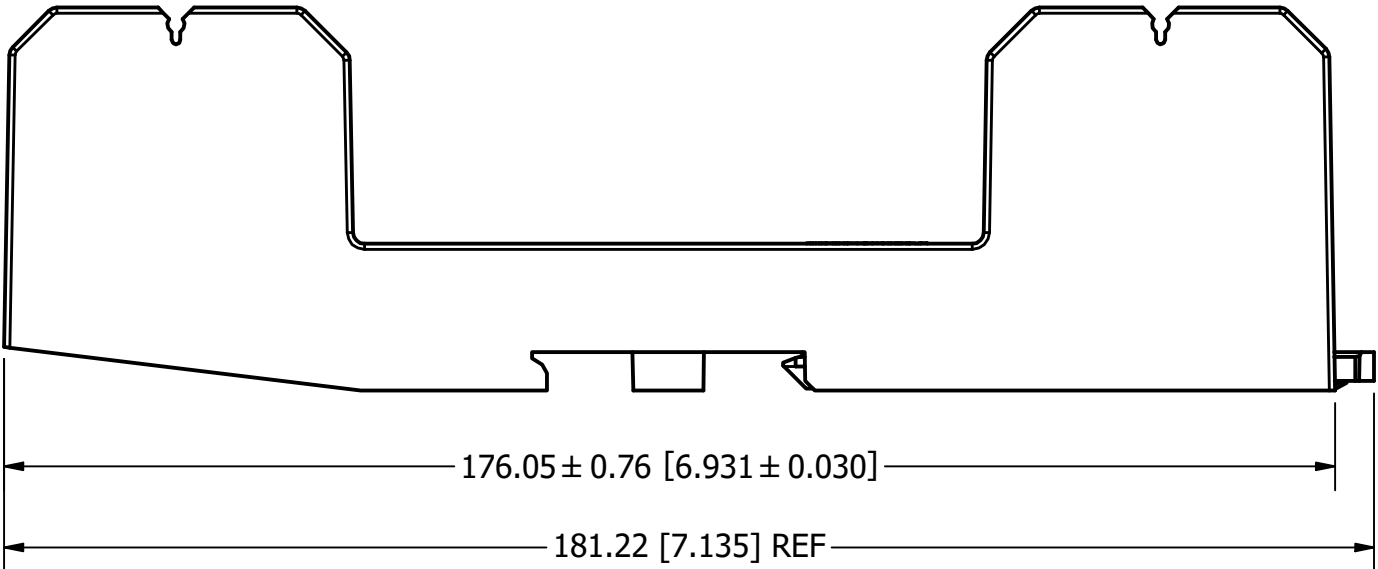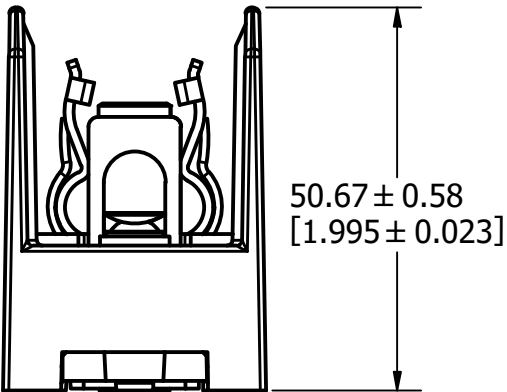

<S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE		
●	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		
MATL SPEC		FINISH	
DRW MYORK	DATE 10/28/2020	SCALE NTS	FINISH GOOD WT GRAMS/PIECE
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994			
3RD ANGLE PROJECTION			
			
TITLE LFXV150601C FUSEBLOCK			
 Littelfuse® CHICAGO, ILLINOIS 60631		REVISION D	DRWG NO. OL-LFXV150601C SHEET 1 OF 1 OUTLINE