
	REVISION				
REV	DATE	DESCRIPTION			
А	6/22/22	525329GCP - RELEASE MRY			

 $-\emptyset 10.31 \pm 0.10$ [ $\emptyset 0.406 \pm 0.004$ ]

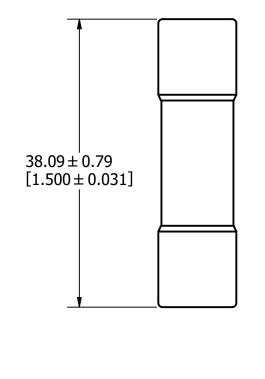

APPROX. SHIPPING WEIGHT: 10 FUSES = 0.14 LB

<u> </u>	I									
1 NO	1 NO COMPONENT NO		DESCRIPTION			QTY/M	U/M			
BILL OF MATERIAL										
<	:S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE								
	•	DENOTES CRITICAL CHARACTERISTICS.								
(	CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE								
(ST) DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.										
CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.							Α			
MATL	SPEC			FINISH	FINISH					
DRW Jeff Moler			DATE 5/13/2022	SCALE NTS	FINISH GOOD W		WT MS/PIECE			
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994										
	3RD ANGLE PROJECTION									
TITL	BLF 1/2 - 30A OUTLINE									
		tol	fuce	REVISION	DRWG NO.	SHEE	T 1 OF 1			
Littelfuse CHICAGO, ILLINOIS 60631			А	OL-0BLF	030					