


ARTIKELNUMMER ARTICLE-No.	B1 IN mm	B2 IN mm	H1 IN mm	H2 IN mm	mm2
178.6116.100_	3.0	4.2	2.8	3.9	0.5 - 1
178.6116.2501/2	3.5	5.1	3.85	4.9	1.5 - 2.5
178.6116.2508	4.1	5.3	3.8	5.3	1.5 - 2.5
178.6116.400_	5.1	6.9	4.7	6.7	2.5 - 4
178.6116.600_	6.2	8.1	5.7	7.3	4 - 6

TOLERANZ DER TABELLENMABE ±0.2 mm.
CHART TOLERANCES ±0.2 mm.

ALLGEMEINTOLERANZEN
GENERAL TOLERANCES
DIN ISO 2768-m

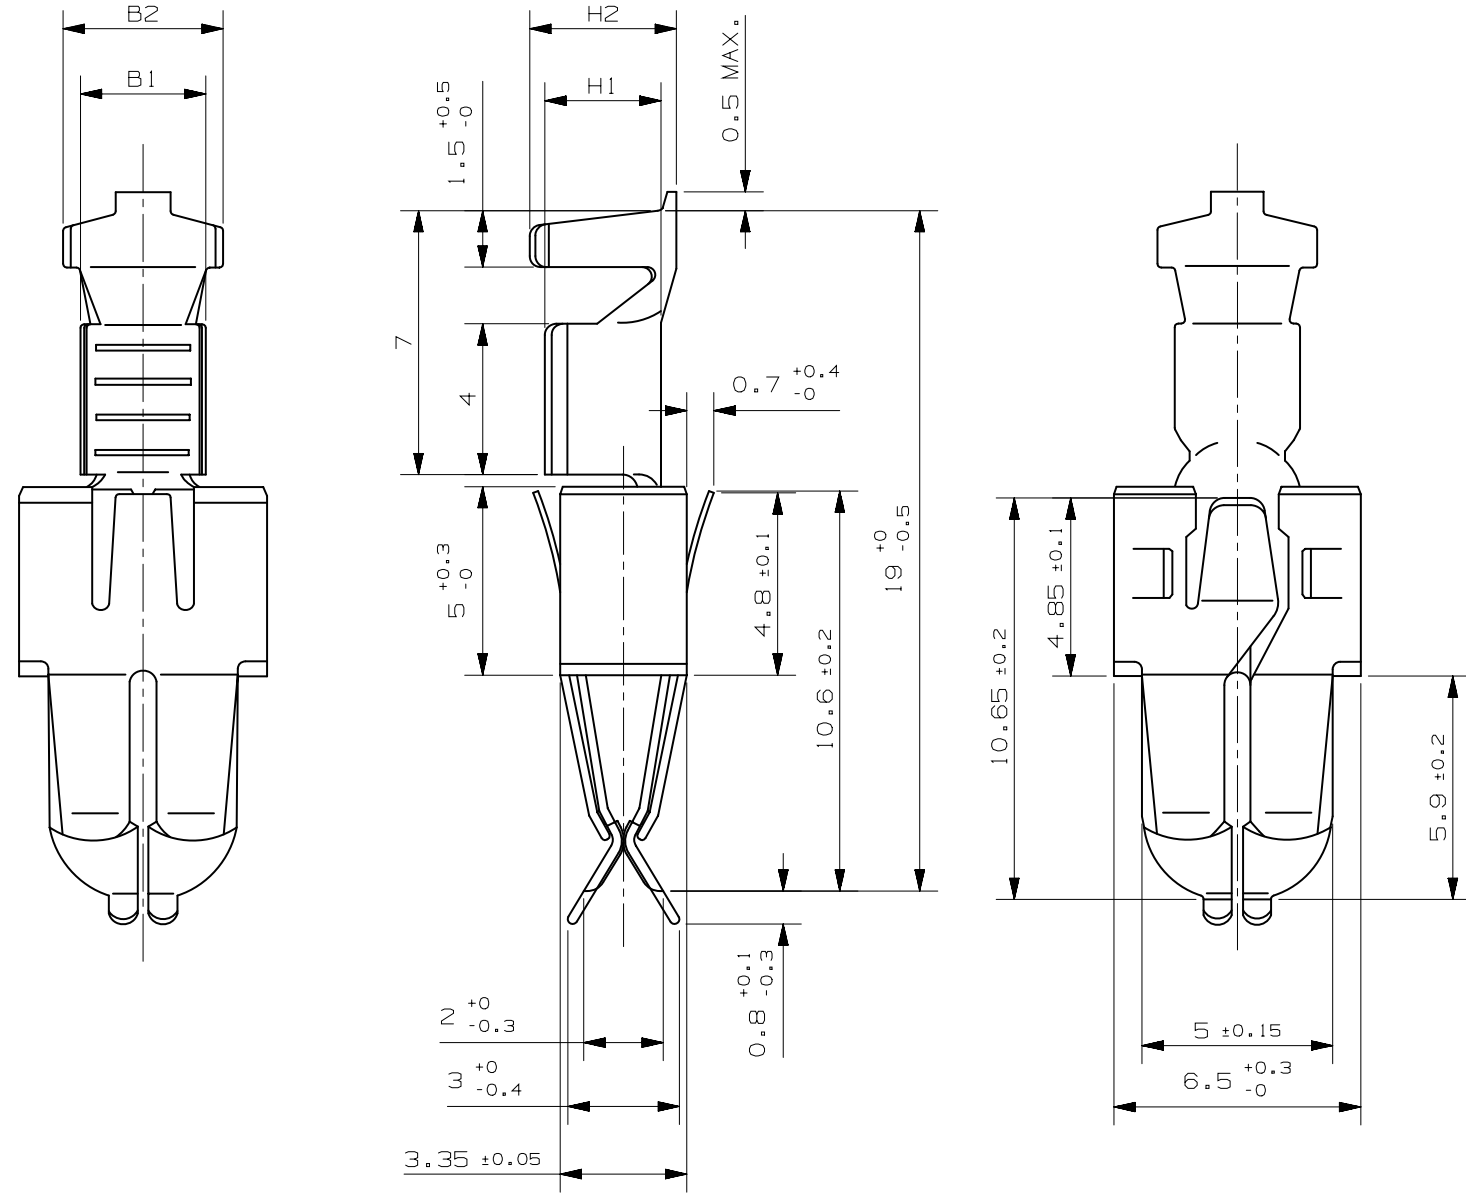

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

© DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

METRIC
COMPONENT

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
BILL OF MATERIAL				

LTR	DATE	REVISION	CHK	APD
A	09/19/12	5061888A-REDRAW IN UG AND CHANGE TERMINAL SHAPE FROM ORIGINAL DRAWING OPL		

COPIES TO	MATL SPEC	CuFeAg
1 9	FINISH	-
2 10	DRW OPL	DATE 09/19/12
3 12	CHK	DATE SUPER DR
4 13	APPD	DATE FINISH GOOD WT
5 14		GRAMS/PIECE
6 15		
7 16		
8 17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-FH)

DIMENSION UP TO OVER UP TO OVER UP TO OVER UP TO OVER

0.5 - 3 3 - 6 6 - 30 30 - 120 120 - 400

TOLERANCE ±0.05 ±0.05 ±0.1 ±0.15 ±0.2

3RD ANGLE PROJECTION

TITLE DFK-KONTAKT DFK-CONTACT

REVISION DRWG. NO. A 178.6116.1000

Littelfuse CHICAGO, USA 773-628-1000