



MC Multiport Series - MS-013

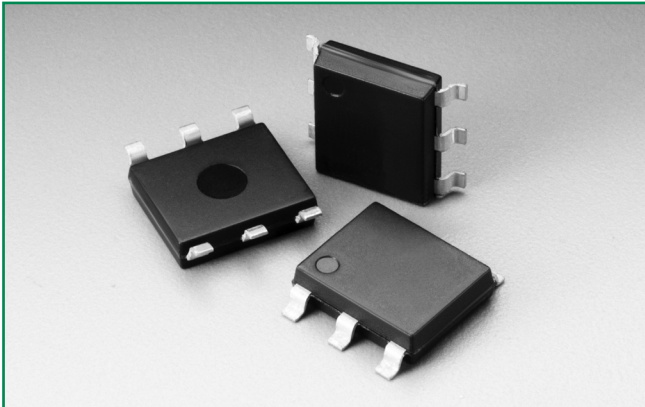


**Agency Approvals**

| Agency | Agency File Number |
|--------|--------------------|
|        | E133083            |

**Pinout Designation**



**Schematic Symbol**

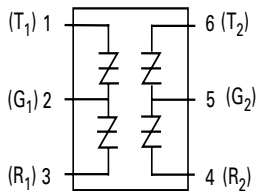

**Description**

The MC Multiport Series MS-013 are low capacitance SIDACtor® thyristors designed to protect broadband equipment from damaging overvoltage transients.

The series provides a dual port surface mount solution that enables equipment to comply with various global regulatory standards while limiting the impact to broadband signals.

**Features and Benefits**

- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- Fails short circuit when surged in excess of ratings
- Two-pair protection
- 40% lower capacitance than our Baseband Protectors, for applications that demand greater signal integrity
- Replaces four discrete components
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

**Applicable Global Standards**

- TIA-968-A
- TIA-968-B
- ITU K.20/21/45 Enhanced Level
- ITU K.20/21/45 Basic Level
- GR 1089 Intra-building
- IEC 61000-4-5 2nd edition
- YD/T 1082
- YD/T 993
- YD/T 950
- GR 1089 Inter-building

**Electrical Characteristics**

| Part Number  | Marking   | $V_{DRM}$               | $V_S$           | $V_{DRM}$          | $V_S$           | $I_H$  | $I_S$  | $I_T$ | $V_T$            | Capacitance                  |
|--------------|-----------|-------------------------|-----------------|--------------------|-----------------|--------|--------|-------|------------------|------------------------------|
|              |           | @ $I_{DRM}=5\mu A$      | @ 100V/ $\mu s$ | @ $I_{DRM}=5\mu A$ | @ 100V/ $\mu s$ |        |        |       | @ $I_T=2.2$ Amps |                              |
|              |           | V                       | V               | V                  | V               |        |        |       | V max            |                              |
|              |           | Pins 1-2, 3-2, 4-5, 6-5 |                 | Pins 1-3, 4-6      |                 | mA min | mA max | A max |                  |                              |
| P0084UCMCLxx | P0084UCMC | 6                       | 25              | 12                 | 50              | 50     | 800    | 2.2   | 8                | See Capacitance Values Table |
| P0304UCMCLxx | P0304UCMC | 25                      | 40              | 50                 | 80              | 50     | 800    | 2.2   | 8                |                              |
| P0644UCMCLxx | P0644UCMC | 58                      | 77              | 116                | 154             | 150    | 800    | 2.2   | 8                |                              |
| P0724UCMCLxx | P0724UCMC | 65                      | 88              | 130                | 176             | 150    | 800    | 2.2   | 8                |                              |
| P0904UCMCLxx | P0904UCMC | 75                      | 98              | 150                | 196             | 150    | 800    | 2.2   | 8                |                              |
| P1104UCMCLxx | P1104UCMC | 90                      | 130             | 180                | 260             | 150    | 800    | 2.2   | 8                |                              |
| P1304UCMCLxx | P1304UCMC | 120                     | 160             | 240                | 320             | 150    | 800    | 2.2   | 8                |                              |

Notes:  
 - Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).  
 - Components are bi-directional.  
 - **XX** Part Number Suffix: **TP** (Tube Pack) or **RP** (Reel Pack).

Table continues on next page.

**Electrical Characteristics** (continued)

| Part Number  | Marking   | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_S$<br>@ 100V/ $\mu s$ | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_S$<br>@ 100V/ $\mu s$ | $I_H$ | $I_S$ | $I_T$ | $V_T$<br>@ $I_T=2.2$<br>Amps | Capacitance                        |
|--------------|-----------|---------------------------------|--------------------------|---------------------------------|--------------------------|-------|-------|-------|------------------------------|------------------------------------|
|              |           | V                               | V                        | V                               | V                        |       |       |       | V max                        |                                    |
|              |           | Pins 1-2, 3-2, 4-5, 6-5         |                          |                                 | Pins 1-3, 4-6            |       |       |       | mA min                       |                                    |
| P1504UCMCLxx | P1504UCMC | 140                             | 180                      | 280                             | 360                      | 150   | 800   | 2.2   | 8                            | See<br>Capacitance<br>Values Table |
| P1804UCMCLxx | P1804UCMC | 170                             | 220                      | 340                             | 440                      | 150   | 800   | 2.2   | 8                            |                                    |
| P2304UCMCLxx | P2304UCMC | 190                             | 260                      | 380                             | 520                      | 150   | 800   | 2.2   | 8                            |                                    |
| P2604UCMCLxx | P2604UCMC | 220                             | 300                      | 440                             | 600                      | 150   | 800   | 2.2   | 8                            |                                    |
| P3104UCMCLxx | P3104UCMC | 275                             | 350                      | 550                             | 700                      | 150   | 800   | 2.2   | 8                            |                                    |
| P3504UCMCLxx | P3504UCMC | 320                             | 400                      | 600                             | 800                      | 150   | 800   | 2.2   | 8                            |                                    |

Notes:  
 - Absolute maximum ratings measured at  $T_A=25^\circ C$  (unless otherwise noted).  
 - Components are bi-directional.  
 - **XX** Part Number Suffix: **TP** (Tube Pack) or **RP** (Reel Pack).

**Capacitance Values**

| Part Number  | pF<br>Pin 1-2 / 3-2 (4-5 / 6-5)<br>Tip-Ground, Ring-Ground |     | pF<br>Pin 1-3 (4-6)<br>Tip-Ring |     |
|--------------|--|-----|---------------------------------|-----|
|              | MIN  | MAX | MIN                             | MAX |
| P0084UCMCLxx | 35   | 75  | 20                              | 45  |
| P0304UCMCLxx | 25   | 45  | 10                              | 25  |
| P0644UCMCLxx | 55   | 85  | 30                              | 50  |
| P0724UCMCLxx | 50   | 75  | 25                              | 45  |
| P0904UCMCLxx | 45   | 70  | 25                              | 40  |
| P1104UCMCLxx | 45   | 70  | 25                              | 40  |
| P1304UCMCLxx | 40   | 60  | 20                              | 35  |
| P1504UCMCLxx | 35   | 55  | 20                              | 35  |
| P1804UCMCLxx | 35   | 50  | 15                              | 30  |
| P2304UCMCLxx | 30   | 50  | 15                              | 30  |
| P2604UCMCLxx | 30   | 45  | 15                              | 30  |
| P3104UCMCLxx | 30   | 45  | 15                              | 25  |
| P3504UCMCLxx | 25   | 40  | 15                              | 25  |


Note: Off-state capacitance ( $C_o$ ) is measured at 1 MHz with a 2 V bias.

**Surge Ratings**


| Series | $I_{PP}$                                     |  |  |  |  |  |  |  |   | $I_{TSM}$<br>50/60 Hz | di/dt |
|--------|--|--|--|--|--|--|--|--|---|-----------------------|-------|
|        | 0.2/310 <sup>1</sup><br>0.5/700 <sup>2</sup> | 2/10 <sup>1</sup><br>2/10 <sup>2</sup> | 8/20 <sup>1</sup><br>1.2/50 <sup>2</sup> | 10/160 <sup>1</sup><br>10/160 <sup>2</sup> | 10/560 <sup>1</sup><br>10/560 <sup>2</sup> | 5/320 <sup>1</sup><br>9/720 <sup>2</sup> | 10/360 <sup>1</sup><br>10/360 <sup>2</sup> | 10/1000 <sup>1</sup><br>10/1000 <sup>2</sup> | 5/310 <sup>1</sup><br>10/700 <sup>2</sup> |                       |       |
|        | A min  | A min                                  | A min                                    | A min                                      | A min                                      | A min                                    | A min                                      | A min  | A min                                     |                       |       |
| C      | 50   | 500                                    | 400                                      | 200  | 150  | 200                                      | 175  | 100  | 200                                       | 30                    | 500   |

Notes:  
 1 Current waveform in  $\mu s$   
 2 Voltage waveform in  $\mu s$   
 - Peak pulse current rating ( $I_{PP}$ ) is repetitive and guaranteed for the life of the product that remains in thermal equilibrium.  
 -  $I_{PP}$  ratings applicable over temperature range of  $-40^\circ C$  to  $+85^\circ C$   
 - The component must initially be in thermal equilibrium with  $-40^\circ C \leq T_j \leq +150^\circ C$


**Thermal Considerations**

| Package  | Symbol          | Parameter                               | Value       | Unit |
|--|-----------------|---|-------------|------|
| Modified MS-013<br> | $T_J$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|  | $T_S$           | Storage Temperature Range               | -65 to +150 | °C   |
|  | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 60          | °C/W |


**V-I Characteristics**

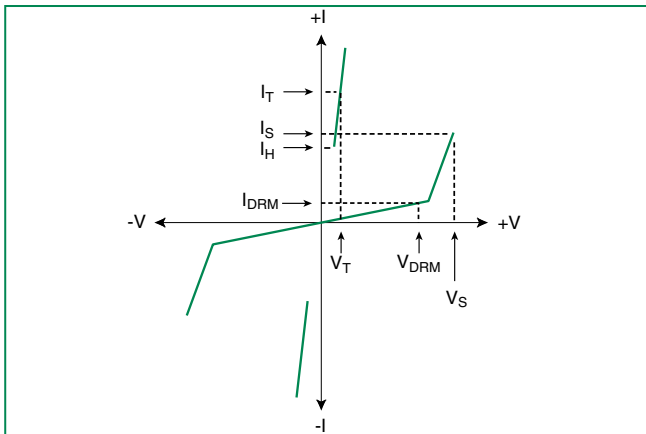


**$t_r \times t_d$  Pulse Waveform**

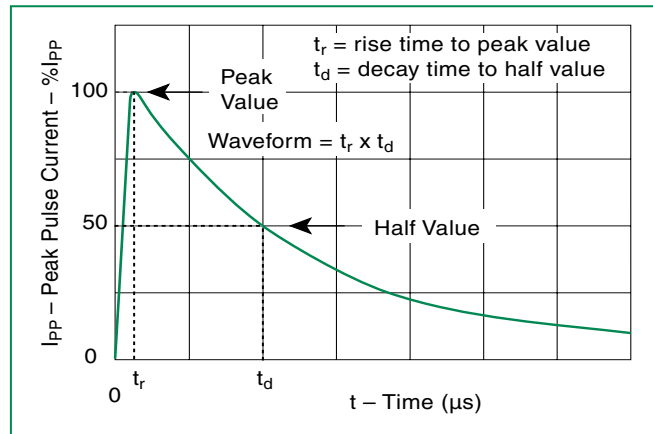

**Normalized  $V_S$  Change vs. Junction Temperature**

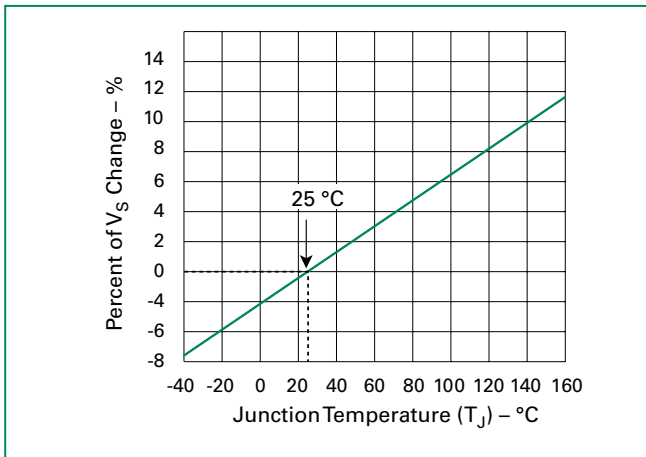

**Normalized DC Holding Current vs. Case Temperature**

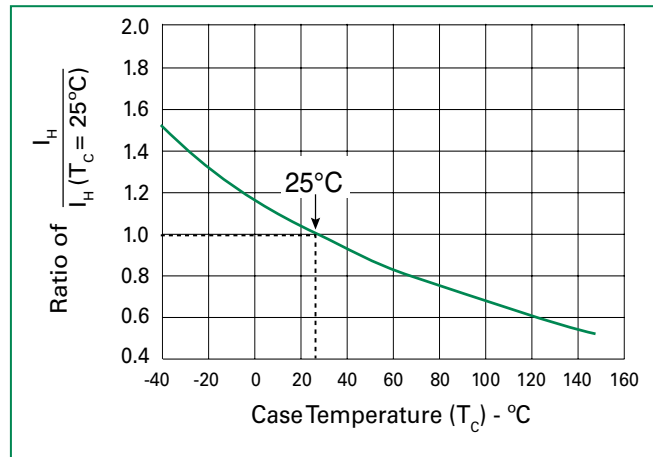

**Additional Information**



**Datasheet**




**Resources**



**Samples**

### Soldering Parameters


|  |                                   |              |
|--|-----------------------------------|--------------|
| Reflow Condition                                       | Pb-Free assembly (see Fig. 1)     |              |
| Pre Heat   | -Temperature Min ( $T_{s(min)}$ ) | +150°C       |
|  | -Temperature Max ( $T_{s(max)}$ ) | +200°C       |
|  | -Time (Min to Max) ( $t_s$ )      | 60-180 secs. |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) | 3°C/sec. Max.                     |              |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   | 3°C/sec. Max.                     |              |
| Reflow   | -Temperature ( $T_L$ ) (Liquidus) | +217°C       |
|  | -Temperature ( $t_L$ )            | 60-150 secs. |
| Peak Temp ( $T_p$ )                                    | +260(+0/-5)°C                     |              |
| Time within 5°C of actual Peak Temp ( $t_p$ )          | 30 secs. Max.                     |              |
| Ramp-down Rate   | 6°C/sec. Max.                     |              |
| Time 25°C to Peak Temp ( $T_p$ )                       | 8 min. Max.                       |              |
| Do not exceed  | +260°C                            |              |

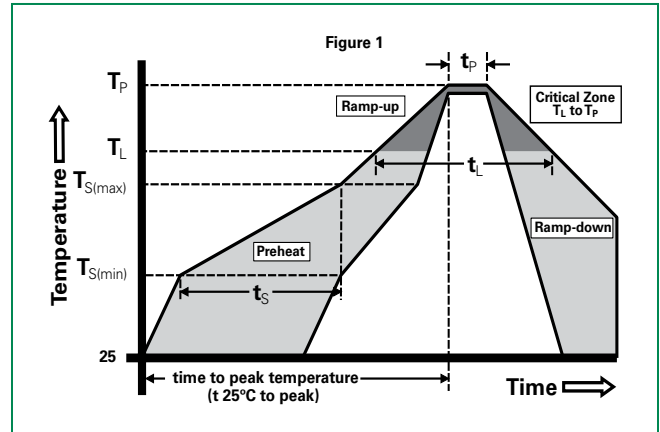

### Physical Specifications

|                        |   |
|------------------------|---|
| <b>Lead Material</b>   | Copper Alloy  |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated                                       |
| <b>Body Material</b>   | UL Recognized epoxy meeting flammability classification V-0 |


### Part Numbering

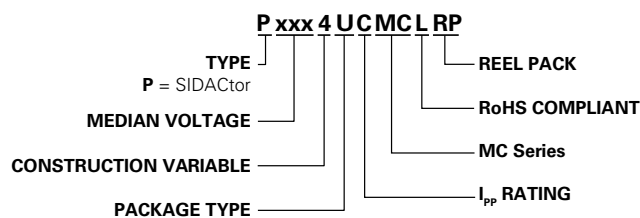


### Environmental Specifications

|   |  |
|---|--|
| <b>High Temp Voltage Blocking</b>       | 80% Rated $V_{DRM}$ ( $V_{AC Peak}$ ) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>                     | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104                  |
| <b>Biased Temp &amp; Humidity</b>       | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101   |
| <b>High Temp Storage</b>                | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101   |
| <b>Low Temp Storage</b>                 | -65°C, 1008 hrs.   |
| <b>Thermal Shock</b>                    | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106                |
| <b>Autoclave (Pressure Cooker Test)</b> | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102  |
| <b>Resistance to Solder Heat</b>        | +260°C, 30 secs. MIL-STD-750 (Method 2031)   |
| <b>Moisture Sensitivity Level</b>       | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1  |

### Part Marking

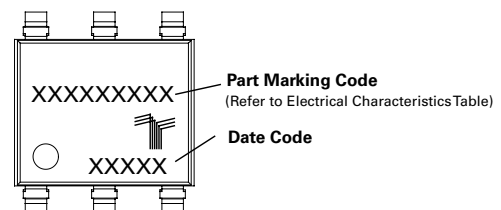

**Dimensions – MS-013**

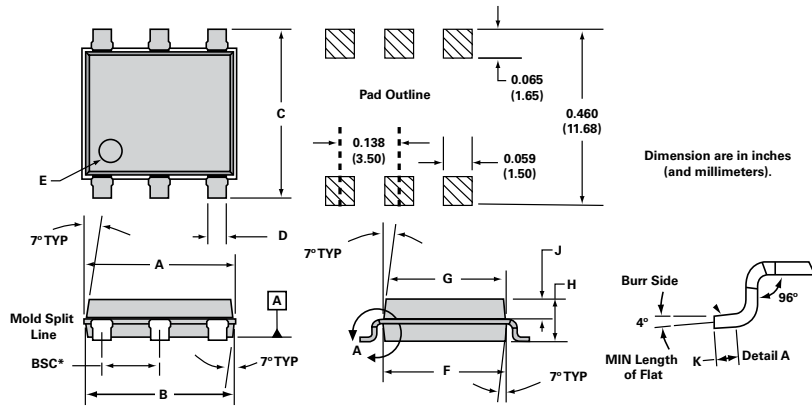


| Dimensions  | Inches |       | Millimeters |       |
|-------------|--------|-------|-------------|-------|
|             | Min    | Max   | Min         | Max   |
| <b>A</b>    | 0.360  | 0.364 | 9.14        | 9.25  |
| <b>B</b>    | 0.352  | 0.356 | 8.94        | 9.04  |
| <b>C</b>    | 0.400  | 0.412 | 10.16       | 10.46 |
| <b>D</b>    | 0.043  | 0.045 | 1.09        | 1.13  |
| <b>E</b>    | 0.047  | 0.055 | 1.19        | 1.40  |
| <b>F</b>    | 0.293  | 0.297 | 7.44        | 7.54  |
| <b>G</b>    | 0.289  | 0.293 | 7.34        | 7.44  |
| <b>H</b>    | 0.089  | 0.093 | 2.26        | 2.36  |
| <b>J</b>    | 0.041  | 0.049 | 1.04        | 1.24  |
| <b>K</b>    | 0.020  |       | 0.51        |       |
| <b>BSC*</b> | 0.133  | 0.143 | 3.38        | 3.63  |

\* BSC = Basic Spacing between Centers


**Packing Options**

| Package Type | Description                              | Quantity          | Added Suffix | Industry Standard |
|--------------|--|-------------------|--------------|-------------------|
| U            | Modified MS-013 6-pin Tape and Reel Pack | 1500              | RP           | EIA-481-D         |
|              | Modified MS-013 6-pin Tube Pack          | 500 (50 per tube) | TP           | N/A               |

**Tape and Reel Specification – MS-013**

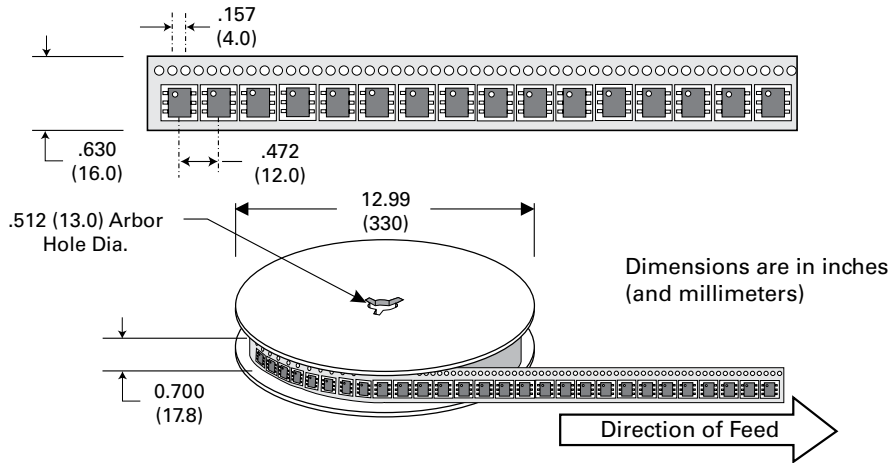

**Tube Pack Dimensions – MS-013**

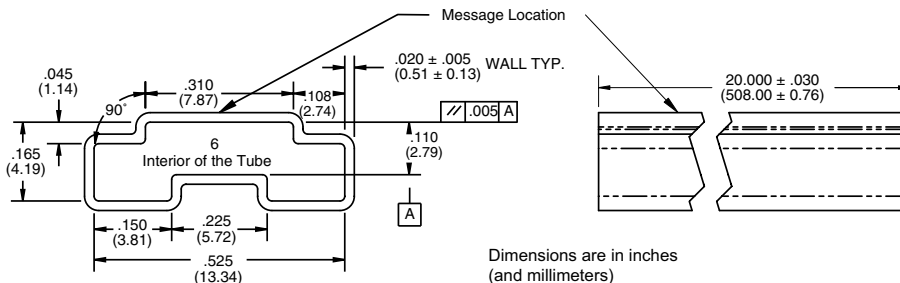

**Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).**