IXYS

Preliminary Technical Information

XPT™ 600V IGBT GenX3™ w/Diode

IXXN200N60B3H1

V_{CES} = 600V
I_{C110} = 98A
$V_{CE(sat)}$ ≤ 1.7V
$t_{fi(typ)}$ = 110ns



Extreme Light Punch Through
IGBT for 10-30kHz Switching

SOT-227B, miniBLOC
E153432



G = Gate, C = Collector, E = Emitter
① either emitter terminal can be used as Main or Kelvin Emitter

Symbol	Test Conditions		Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C		600	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ		600	V
V_{GES}	Continuous		±20	V
V_{GEM}	Transient		±30	V
I_{C25}	T_C = 25°C (Chip Capability)		200	A
I_{C110}	T_C = 110°C		98	A
I_{F110}	T_C = 110°C		30	A
I_{CM}	T_C = 25°C, 1ms		1000	A
I_A	T_C = 25°C		100	A
E_{AS}	T_C = 25°C		1	J
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 150°C, R_G = 1Ω Clamped Inductive Load		I_{CM} = 400 @$V_{CE} \leq V_{CES}$	A
t_{sc} (SCSOA)	V_{GE} = 15V, V_{CE} = 360V, T_J = 150°C R_G = 10Ω, Non Repetitive		10	µs
P_C	T_C = 25°C		780	W
T_J			-55 ... +150	°C
T_{JM}			150	°C
T_{stg}			-55 ... +150	°C
V_{ISOL}	50/60Hz	t = 1min	2500	V~
	I_{ISOL} ≤ 1mA	t = 1s	3000	V~
M_d	Mounting Torque		1.5/13	Nm/lb.in.
	Terminal Connection Torque		1.3/11.5	Nm/lb.in.
Weight			30	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250µA, V_{GE} = 0V	600			V
$V_{GE(th)}$	I_C = 250µA, V_{CE} = V_{GE}	3.5		6.0	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			50	µA
	Note 2, T_J = 150°C			3	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ±20V			±200	nA
$V_{CE(sat)}$	I_C = 100A, V_{GE} = 15V, Note 1		1.40	1.70	V
	T_J = 150°C		1.58		V

Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- miniBLOC, with Aluminium Nitride Isolation
- Optimized for Low Conduction and Switching Losses
- Isolated Mounting Surface
- Anti-Parallel Ultra Fast Diode
- 2500V~ Electrical Isolation
- Optimized for 10-30kHz Switching
- Avalanche Rated
- Short Circuit Capability
- Very High Current Capability
- Square RBSOA

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

© 2013 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 60A, V_{CE} = 10V, Note 1	27	45		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		9970		pF
C_{oes}			570		pF
C_{res}			183		pF
$Q_{g(on)}$	I_C = 200A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		315		nC
Q_{ge}			98		nC
Q_{gc}			130		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		48		ns
t_{ri}	I_C = 100A, V_{GE} = 15V		100		ns
E_{on}	V_{CE} = 360V, R_G = 1Ω		2.85		mJ
$t_{d(off)}$	Note 3		160		ns
t_{fi}			110		ns
E_{off}			2.90	4.40	mJ
$t_{d(on)}$	**Inductive load, T_J = 150°C**		46		ns
t_{ri}	I_C = 100A, V_{GE} = 15V		94		ns
E_{on}	V_{CE} = 360V, R_G = 1Ω		4.40		mJ
$t_{d(off)}$	Note 3		180		ns
t_{fi}			215		ns
E_{off}			3.45		mJ
R_{thJC}				0.16	°C/W
R_{thCS}			0.05		°C/W

SOT-227B miniBLOC (IXXN)

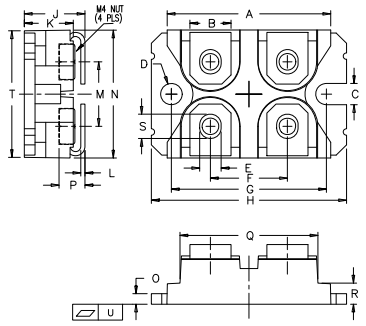

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	1.240	1.255	31.50	31.88
B	.307	.323	7.80	8.20
C	.161	.169	4.09	4.29
D	.161	.169	4.09	4.29
E	.161	.169	4.09	4.29
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.496	1.505	38.00	38.23
J	.460	.481	11.68	12.22
K	.351	.378	8.92	9.60
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.078	.084	1.98	2.13
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.155	.174	3.94	4.42
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	-.002	.004	-0.05	0.1

Reverse Diode (FRED)

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
V_F	I_F = 100A, V_{GE} = 0V, Note 1			2.5	V
	T_J = 150°C		2.3		V
I_{RM}	I_F = 100A, V_{GE} = 0V, T_J = 150°C		95		A
t_{rr}	$-di_F/dt$ = 1500A/µs, V_R = 300V		100		ns
R_{thJC}				0.70	°C/W

Notes:

1. Pulse test, t ≤ 300µs, duty cycle, d ≤ 2%.
2. Part must be heatsunk for high-temp Ices measurement.
3. Switching times & energy losses may increase for higher V_{CE}(Clamp), T_J or R_G.

PRELIMANARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,860,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @ T_J = 25ºC

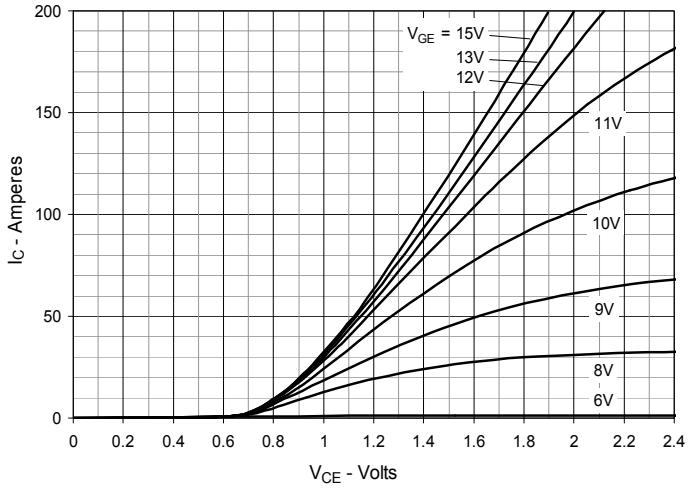

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

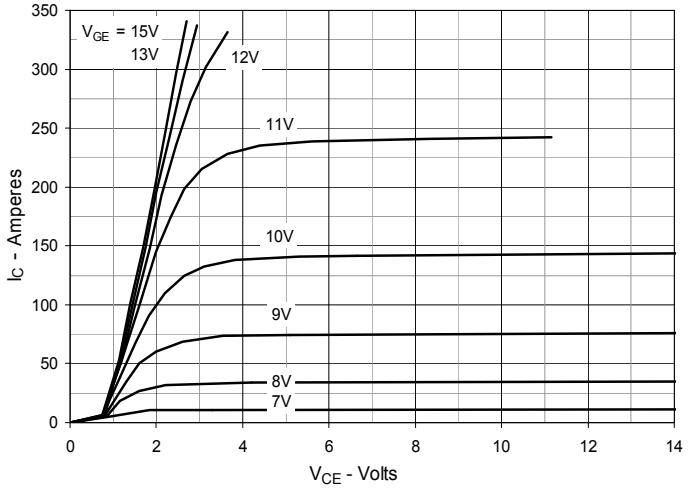

Fig. 3. Output Characteristics @ T_J = 150ºC

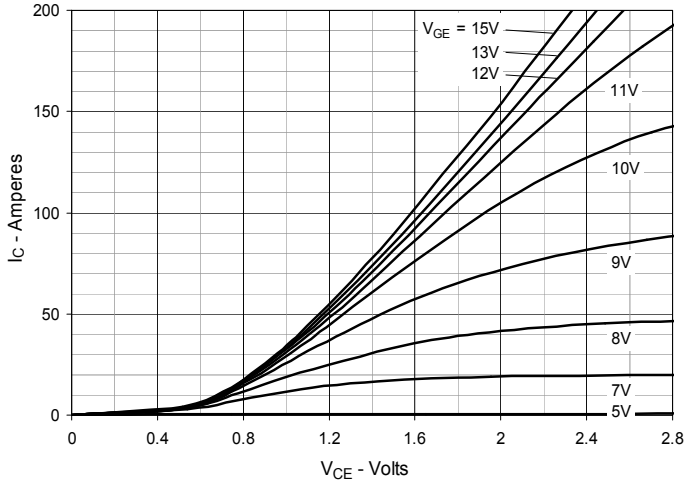

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

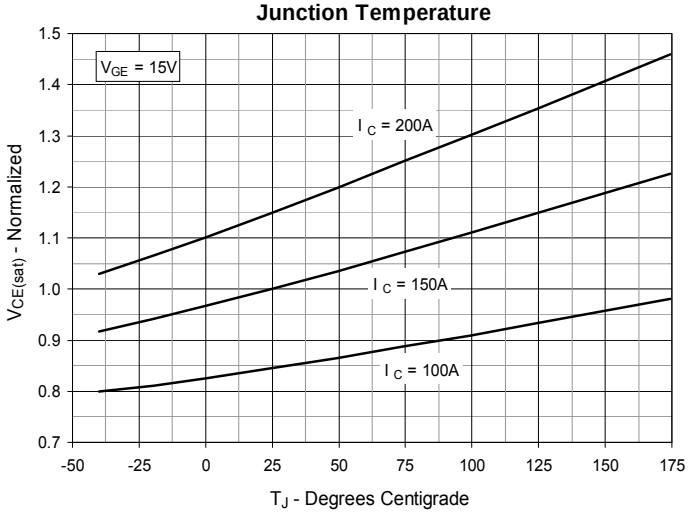

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

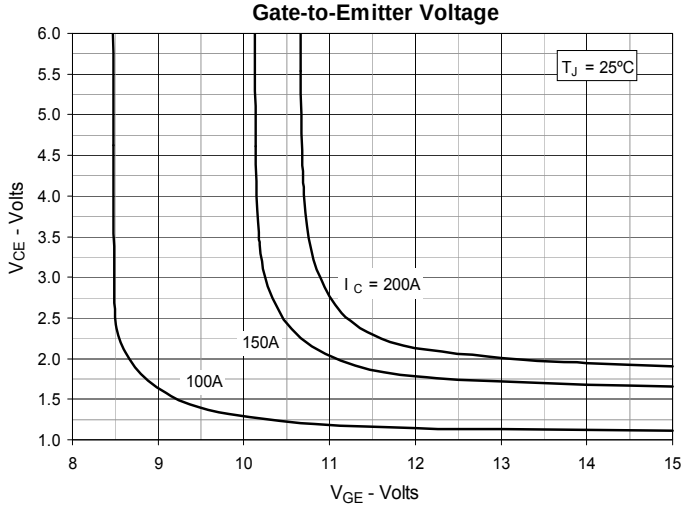

Fig. 6. Input Admittance

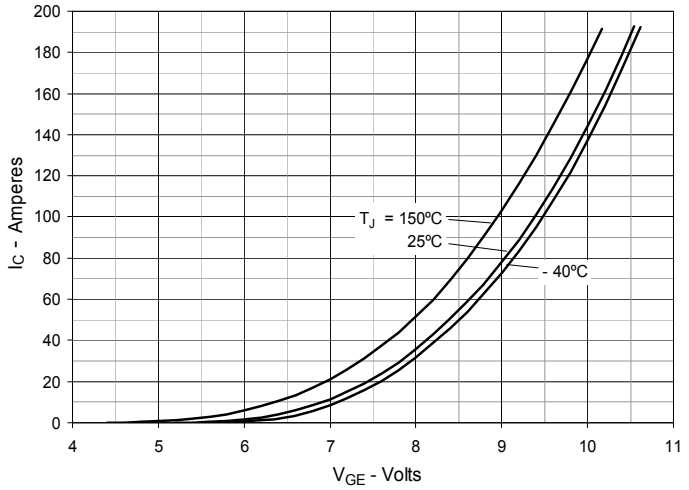

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

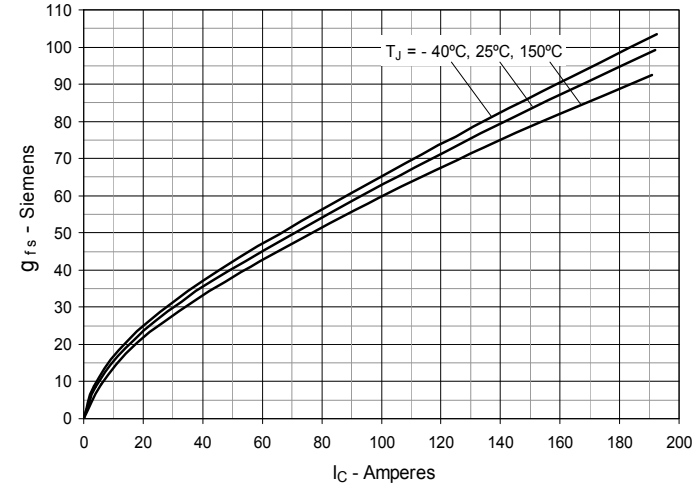

Fig. 8. Gate Charge

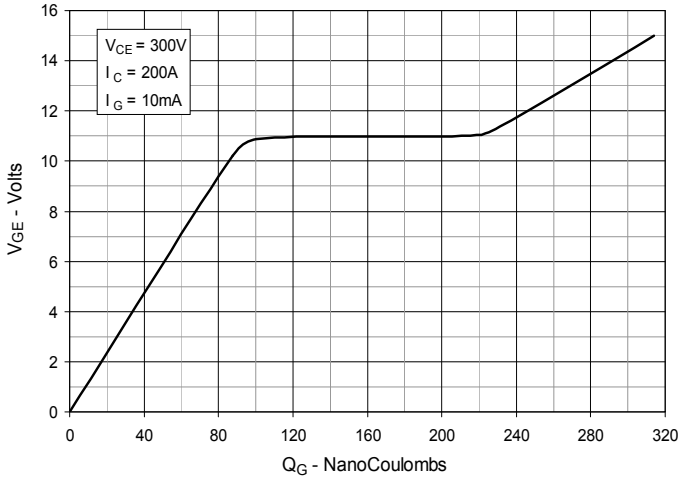

Fig. 9. Capacitance

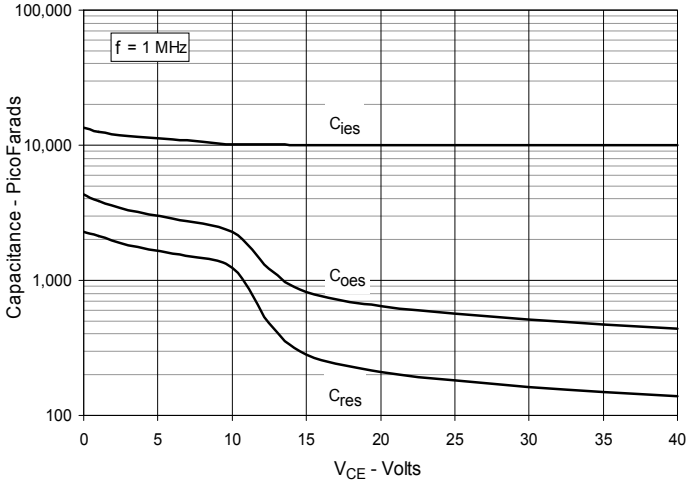

Fig. 10. Reverse-Bias Safe Operating Area

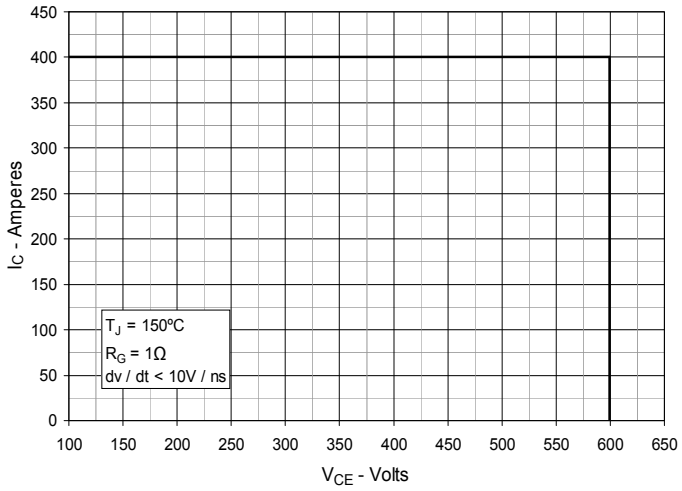

Fig. 11. Forward-Bias Safe Operating Area

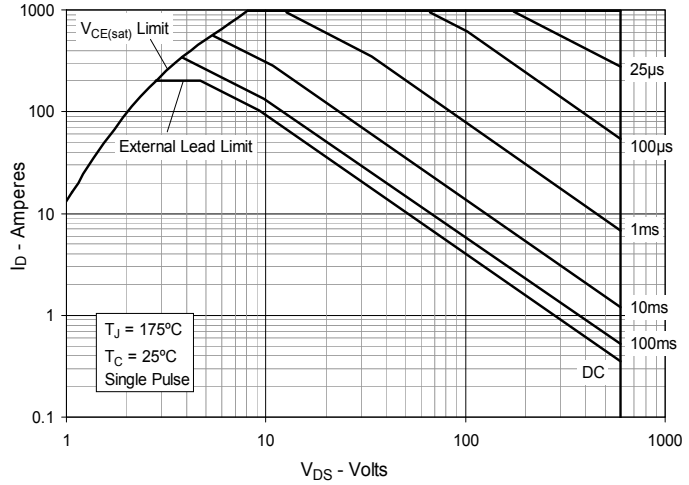

Fig. 12. Maximum Transient Thermal Impedance

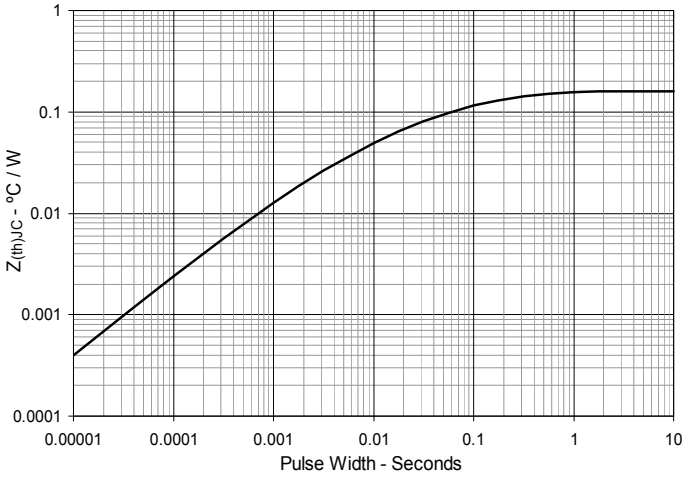

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Inductive Switching Energy Loss vs. Gate Resistance

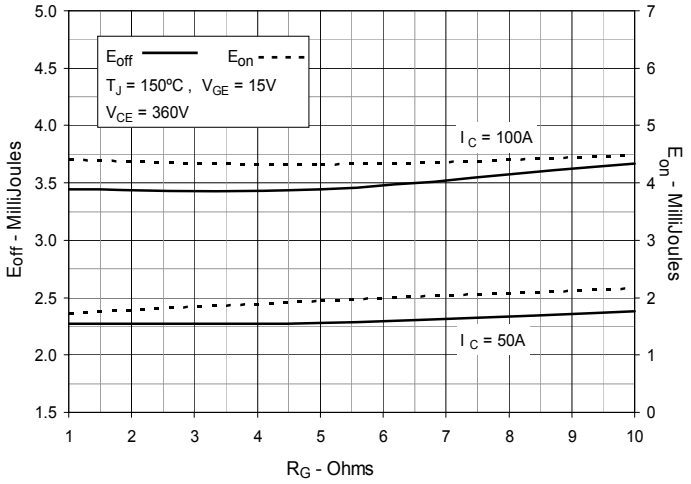

Fig. 14. Inductive Switching Energy Loss vs. Collector Current

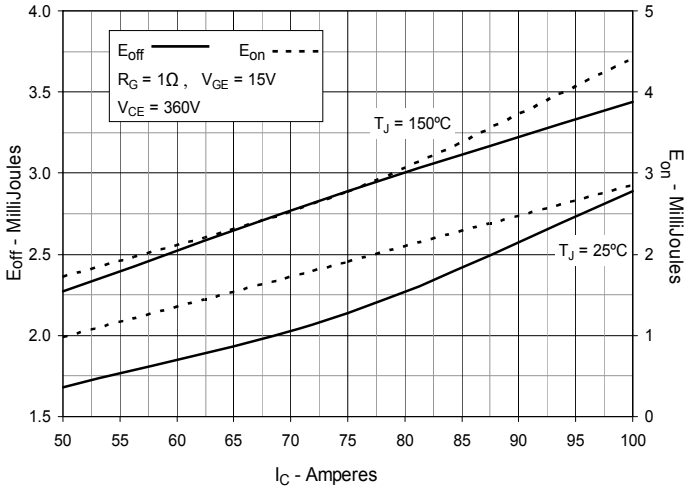

Fig. 15. Inductive Switching Energy Loss vs. Junction Temperature

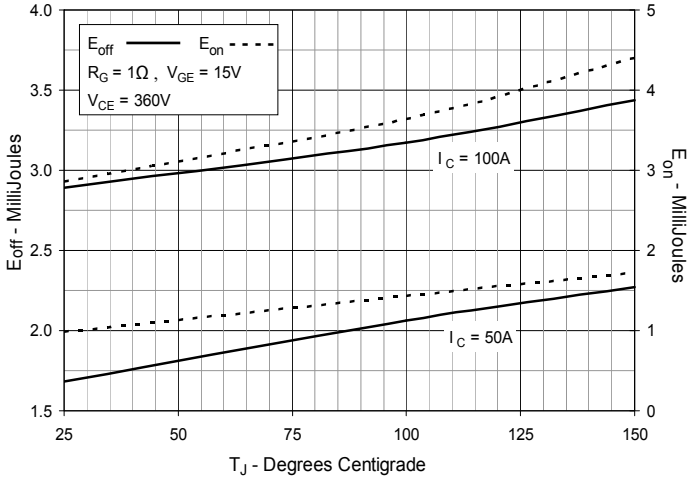

Fig. 16. Inductive Turn-off Switching Times vs. Gate Resistance

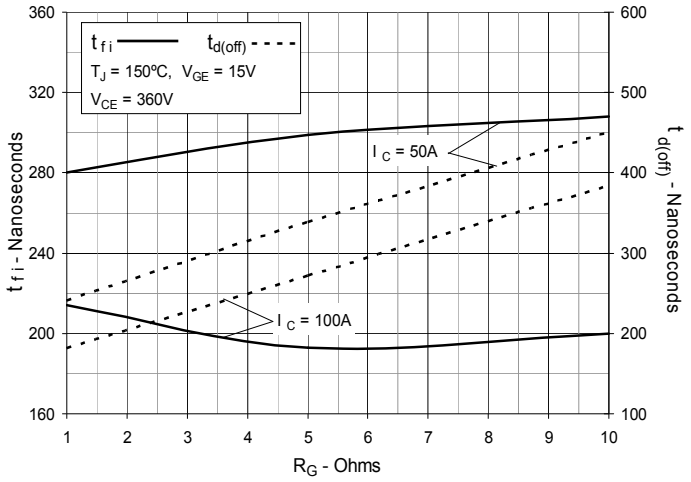

Fig. 17. Inductive Turn-off Switching Times vs. Collector Current

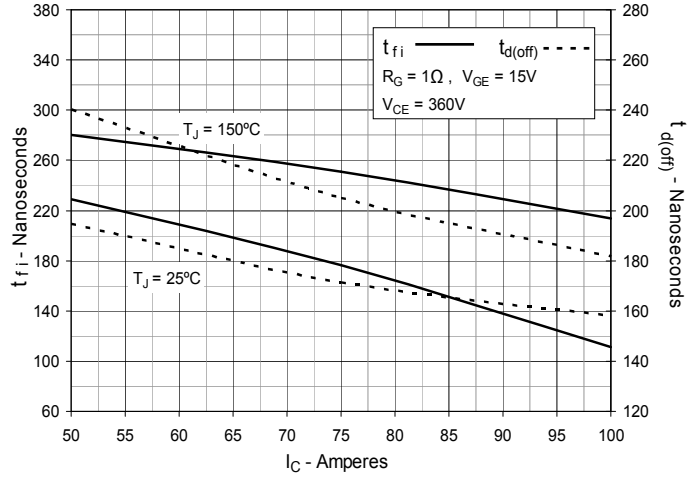

Fig. 18. Inductive Turn-off Switching Times vs. Junction Temperature

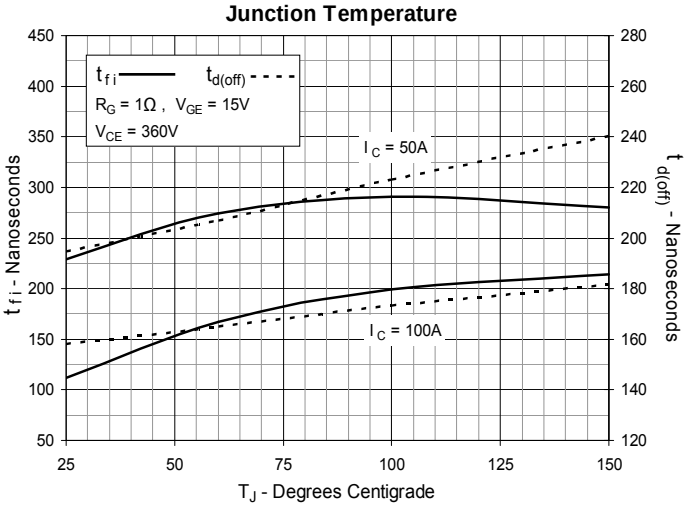

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 19. Inductive Turn-on Switching Times vs. Gate Resistance

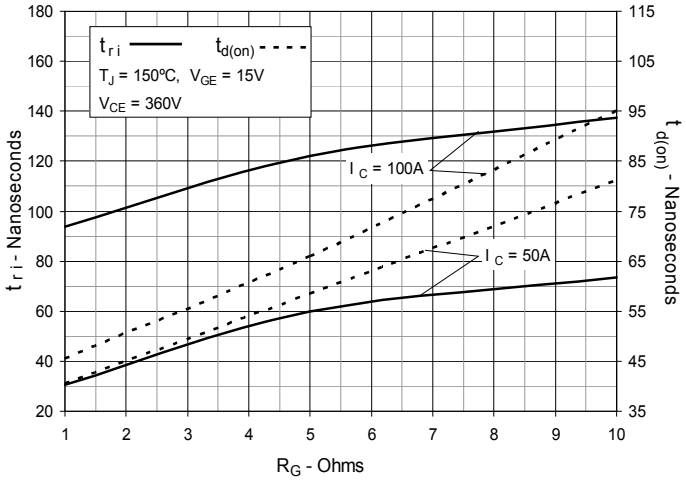

Fig. 20. Inductive Turn-on Switching Times vs. Collector Current

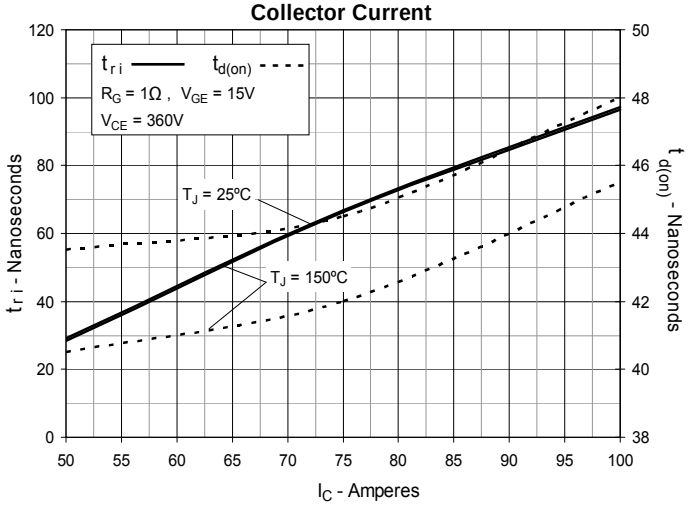

Fig. 21. Inductive Turn-on Switching Times vs. Junction Temperature

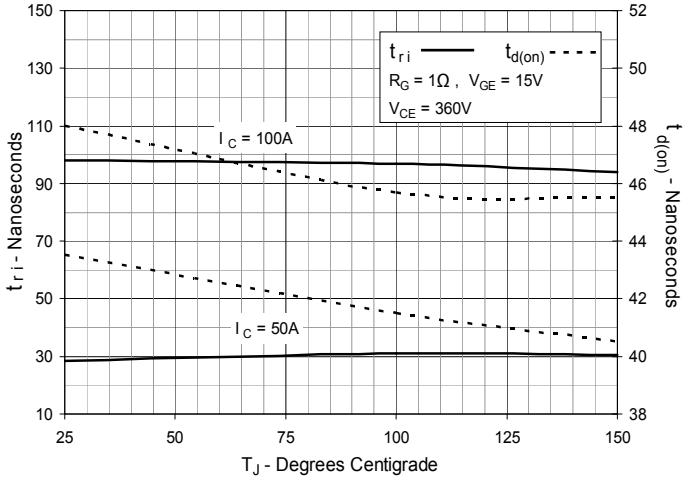

Fig. 22. Typ. Forward characteristics

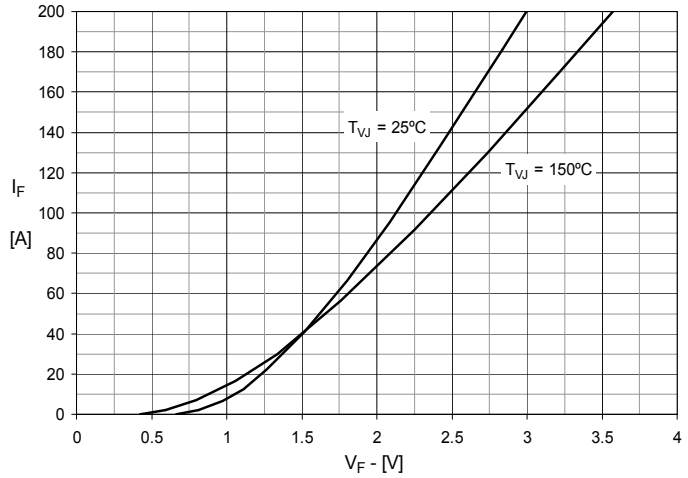

Fig. 23. Typ. Reverse Recovery Charge Q_{rr} vs. $-di_F/dt$

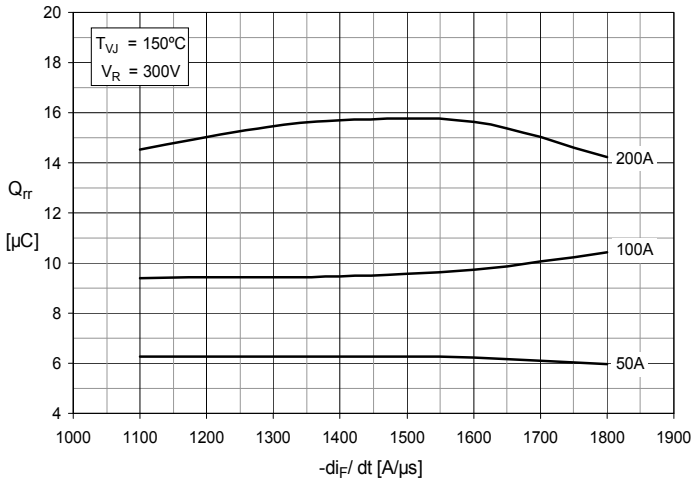

Fig. 24. Typ. Peak Reverse Current I_{RM} vs. $-di_F/dt$

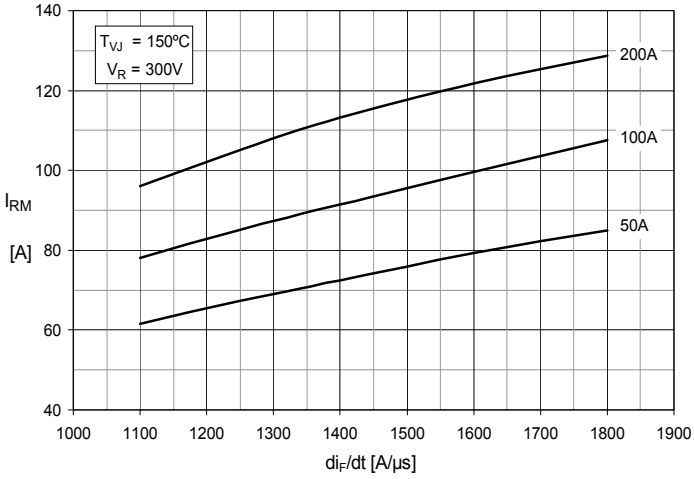

Fig. 25. Typ. Recovery Time t_{rr} vs. $-di_F/dt$

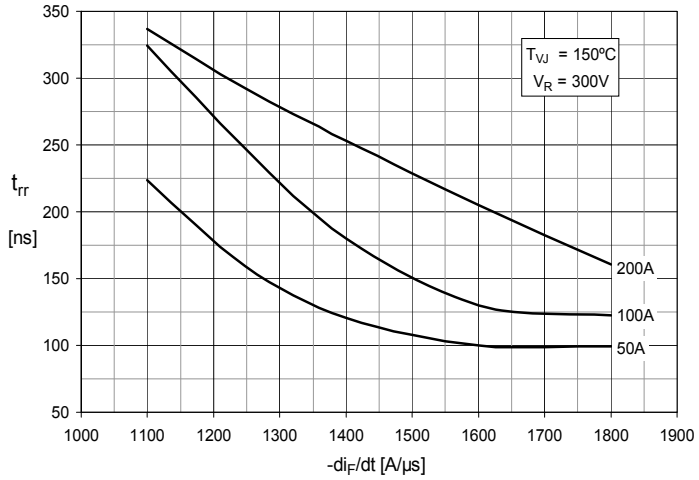

Fig. 26. Typ. Recovery Energy E_{rec} vs. $-di_F/dt$

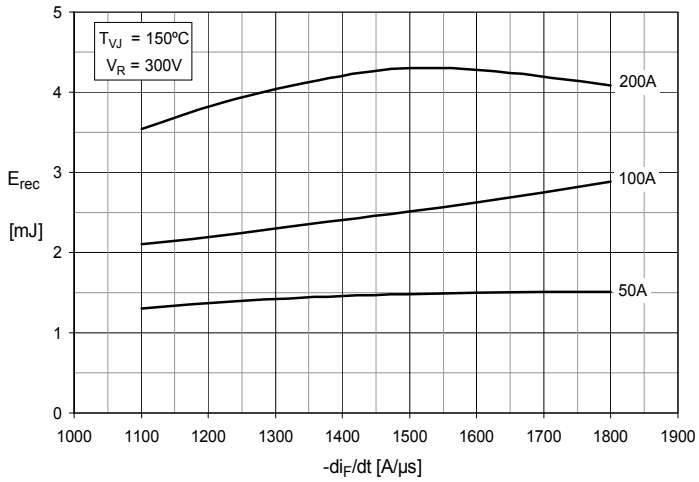

© 2013 IXYS CORPORATION, All Rights Reserved

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.