

# 460 Series

## PICO® Slo-Blo® Surface Mount Fuse



### Description

The 460 Series Slo-Blo® SMF Fuse is based on Littelfuse PICO® fuse through-hole technology, though offered in a surface mount package.

This series of devices meet the requirements of the RoHS directive.

### Features & Benefits

- High inrush current withstand capability
- Wide operating temperature range
- Wide current rating range: 0.375A to 5A
- Halogen free and RoHS compliant

### Applications

- Wireless base station
- Network equipment
- Telecom equipment

### Additional Information



Resources



Accessories



Samples

### Agency Approvals

Agency	Agency File Number	Ampere Range
CE	N/A	0.375A - 5A
UL	E10480	0.375A - 5A
SP	29862	0.375A - 5A
PSE	NBK030205-E10480B	1A - 5A

### Electrical Characteristics for Series

% of Ampere Rating	Opening Time
100%	4 hours, Minimum
200%	1 second, Min.; 120 seconds, Max.
300%	0.2 second, Min.; 3 seconds, Max.
800%	0.002 second, Min.; 0.1 second, Max.


### Electrical Specifications by Item

Ampere Rating (A)	Amp Code	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec)	Agency Approvals			
						CE	UL	SP	PSE
0.375	.375	125	50 A @125 VAC 50 A @125 VDC	1.7400	0.085	x	x	x	-
0.500	.500	125		1.1900	0.210	x	x	x	-
0.750	.750	125		0.4970	0.760	x	x	x	-
1.00	.001	125		0.2800	2.01	x	x	x	x
1.50	.015	125		0.1170	3.94	x	x	x	x
2.00	.002	125		0.0720	7.60	x	x	x	x
2.50	.025	125		0.0520	13.0	x	x	x	x
3.00	.003	125		0.0380	18.15	x	x	x	x
3.50	.035	125		0.0240	26.8	x	x	x	x
4.00	.004	125		0.0200	35.0	x	x	x	x
5.00	.005	125		0.0133	54.8	x	x	x	x

# 460 Series

## PICO® Slo-Blo® Surface Mount Fuse

### Temperature Re-rating Curve

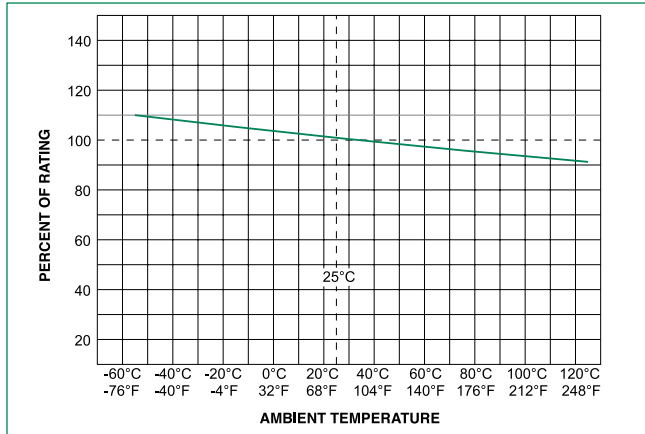

**Note: 1.** Re-rating depicted in this curve is in addition to the standard derating of 25% for continuous operation.


### Soldering Parameters

<b>Wave Soldering</b>	260°C, 3 seconds max.
<b>Reflow Soldering</b>	230°C, 30 seconds max.


### Product Characteristics

<b>Materials</b>	<b>Body:</b> Molded Thermoplastic <b>Terminations:</b> 100% Tin-plated Copper
<b>Solderability</b>	MIL-STD-202, Method 208
<b>Product Marking</b>	<b>Body:</b> Brand Logo, Current Rating, Voltage Rating, Series Code, Date Code, Agency Approved Logo
<b>Moisture Sensitivity</b>	Level 1 J-STD - 020
<b>Operating Temp.</b>	-55°C to 125°C (Consider re-rating)
<b>Shock</b>	MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 msec.)
<b>Vibration</b>	MIL-STD-202, Method 201 (10-55 Hz, 0.06 inch total excursion)
<b>Salt Spray</b>	MIL-STD-202, Method 101, Test Condition B (48 hours)
<b>Insulation Resistance (After Opening)</b>	MIL-STD-202, Method 302, (10,000 ohms minimum at 100 volts)
<b>Thermal Shock</b>	MIL-STD-202, Method 107, (-55°C to 125°C)
<b>Moisture Resistance</b>	MIL-STD-202, Method 106, High Humidity (90-98 RH), Heat (65°C)

### Average Time Current Curves

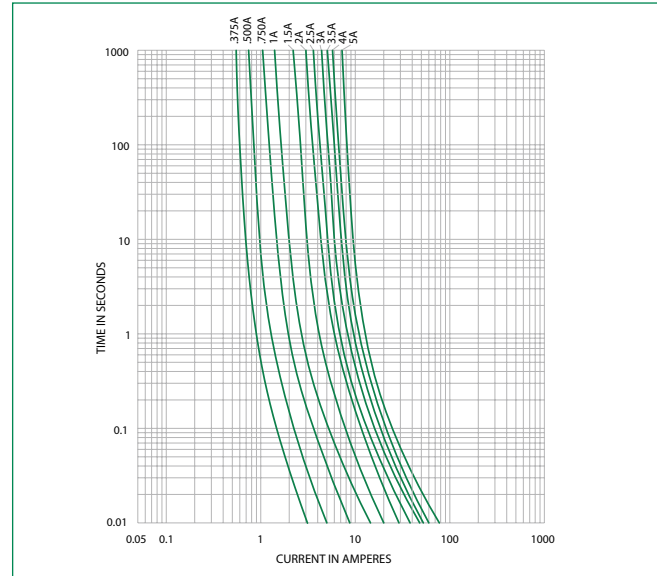

### Dimensions

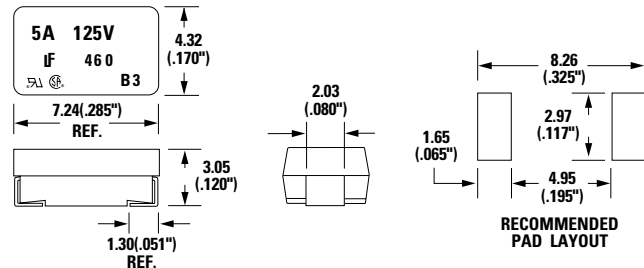

### Part Numbering System

<b>SERIES</b>	0460
<b>AMP CODE</b>	.500
<b>QUANTITY CODE</b>	UR
<b>PACKAGING CODE</b>	

Example:  
1 Amp product is 0460 **001**. UR (.5 Amp product shown above).

Refer to Electrical Characteristics table

UR = 500 pcs  
ER = 2500 pcs

R = Tape and Reel

### Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code
12mm Tape and Reel	EIA RS-481-1 (IEC 286, part 3)	500	UR
		2500	ER

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).