IXYS

Trench Gate Power MOSFET

N-Channel Enhancement Mode

IXTA50N25T IXTQ50N25T
IXTP50N25T IXTH50N25T

V_{DSS} = 250V
I_{D25} = 50A
$R_{DS(on)}$ ≤ 60mΩ



TO-263 AA (IXTA)



TO-220AB (IXTP)



TO-3P (IXTQ)



TO-247 (IXTH)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	250	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	250	V
V_{GSM}	Transient	± 30	V
I_{D25}	T_C = 25°C	50	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	130	A
I_A	T_C = 25°C	5	A
E_{AS}	T_C = 25°C	1.5	J
P_D	T_C = 25°C	400	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062in.) from Case for 10s	300	°C
	Plastic Body for 10 s	260	°C
M_d	Mounting Torque (TO-220, TO-3P &TO-247)	1.13 / 10	Nmlb.in.
F_C	Mounting Force (TO-263)	10..65 / 2.2..14.6	N/lb.
Weight	TO-263	2.5	g
	TO-220	3.0	g
	TO-3P	5.5	g
	TO-247	6.0	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 1mA	250			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 1mA	3.0		5.0	V
I_{GSS}	V_{GS} = ± 20V, V_{DS} = 0V			± 100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			1	μA
	T_J = 125°C			150	μA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			60	mΩ

Features

- Avalanche Rated
- High Current Handling Capability
- Fast Intrinsic Rectifier
- Low $R_{DS(on)}$

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- DC-DC Coverters
- Battery Chargers
- Switch-Mode and Resonant-Mode Power Supplies
- DC Choppers
- AC and DC Motor Drives
- Uninterrupted Power Supplies
- High Speed Power Switching Applications

© 2010 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS}= 10V, I_D = 0.5 • I_{D25}, Note 1	35	58		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		4000		pF
C_{oss}			410		pF
C_{rss}			60		pF
$t_{d(on)}$	**Resistive Switching Times**		14		ns
t_r	V_{GS} = 15V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		25		ns
$t_{d(off)}$	R_G = 3.3Ω (External)		47		ns
t_f			25		ns
$Q_{g(on)}$	V_{GS}= 10V, V_{DS} = 0.5 • V_{DSS} , I_D = 0.5 • I_{D25}		78		nC
Q_{gs}			19		nC
Q_{gd}			22		nC
R_{thJC}				0.31	°C/W
R_{thCH}	(TO-220)		0.50		°C/W
	(TO-3P & TO-247)		0.25		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			50	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			200	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.5	V
t_{rr}	I_F = 25A, -di/dt = 250A/μs		166		ns
I_{RM}	V_R = 100V, V_{GS} = 0V		23		A
Q_{RM}			1.9		μC

Note: 1. Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

TO-263 (IXTA) Outline

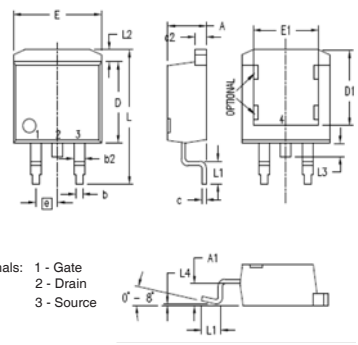

Terminals: 1 - Gate
2 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.340	.380	8.64	9.65
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.575	.625	14.61	15.88
L1	.090	.110	2.29	2.79
L2	.040	.055	1.02	1.40
L3	.050	.070	1.27	1.78
L4	0	.005	0	0.13

TO-247 (IXTH) Outline

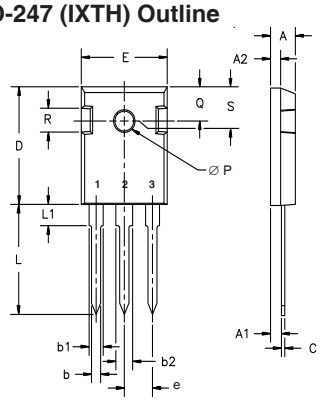

Terminals: 1 - Gate 2 - Drain
3 - Source

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

TO-220 (IXTP) Outline



Pins: 1 - Gate 2 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

TO-3P (IXTQ) Outline

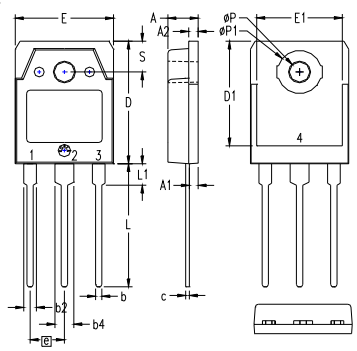

Terminals: 1 - Gate 2 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.799	19.80	20.30
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
øP	.126	.134	3.20	3.40
øP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 1. Output Characteristics @ T_J = 25ºC

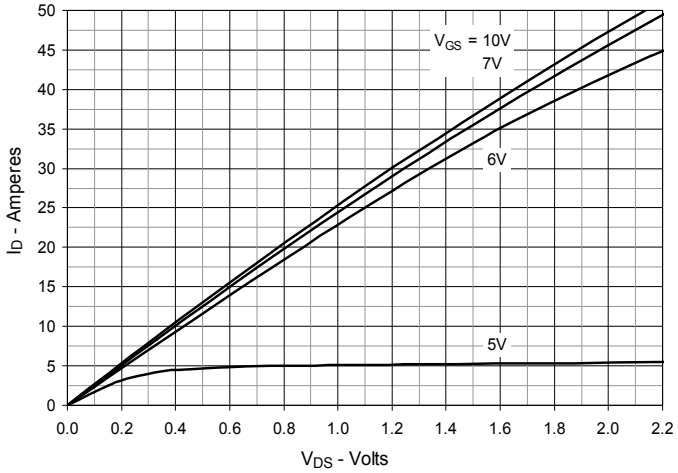

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

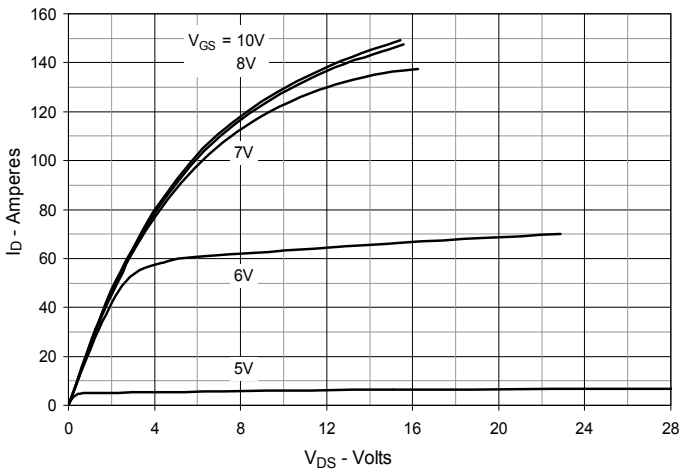

Fig. 3. Output Characteristics @ T_J = 125ºC

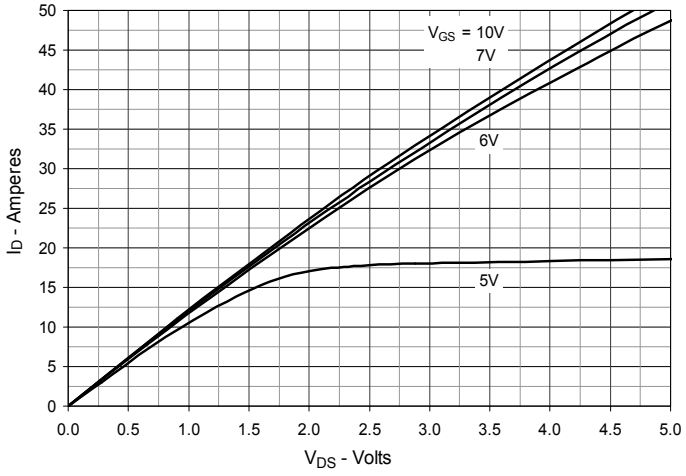

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 25A Value vs. Junction Temperature

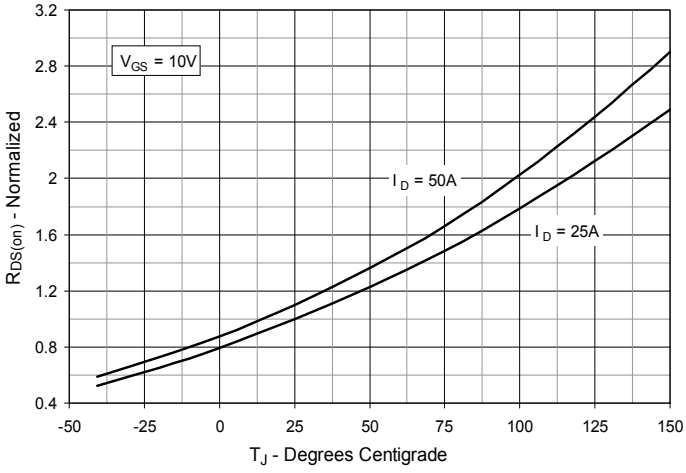

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 25A Value vs. Drain Current

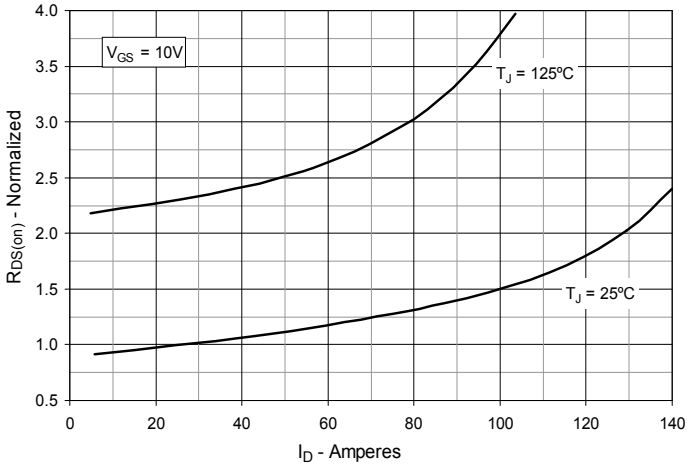

Fig. 6. Maximum Drain Current vs. Case Temperature

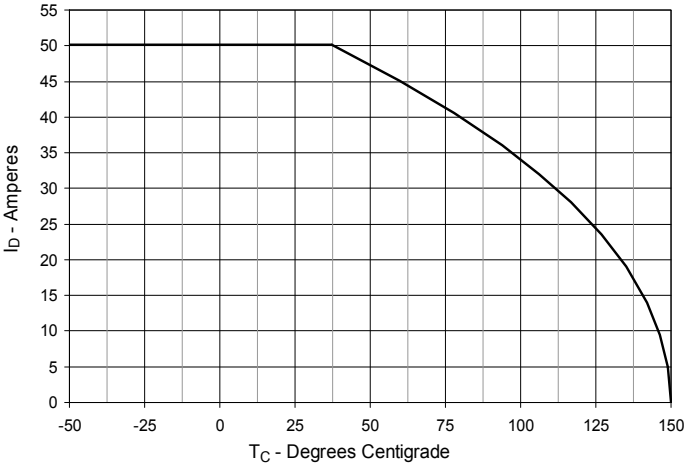

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 7. Input Admittance

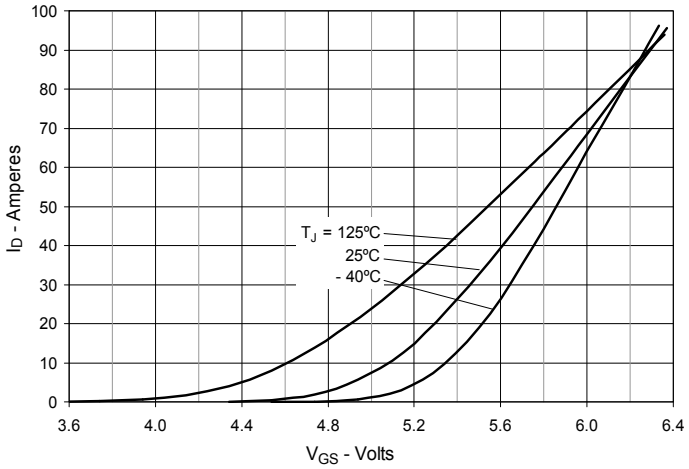

Fig. 8. Transconductance

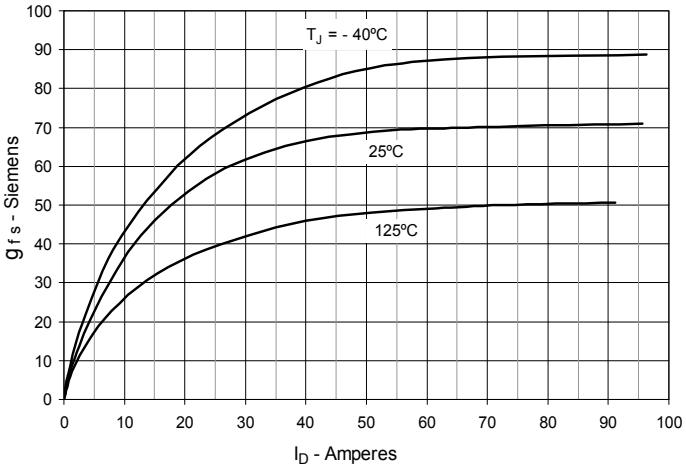

Fig. 9. Forward Voltage Drop of Intrinsic Diode

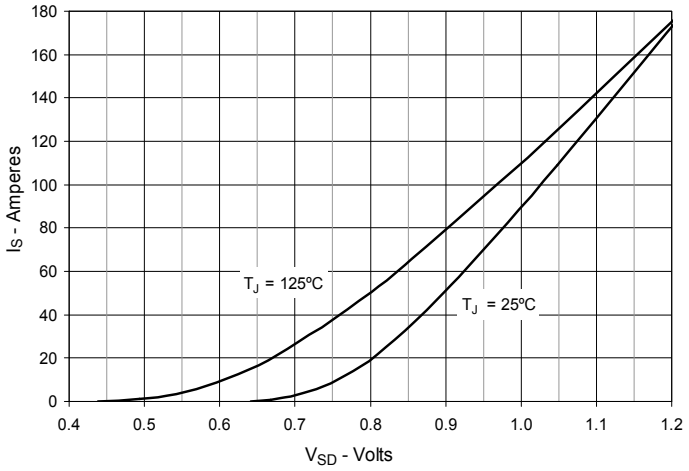

Fig. 10. Gate Charge

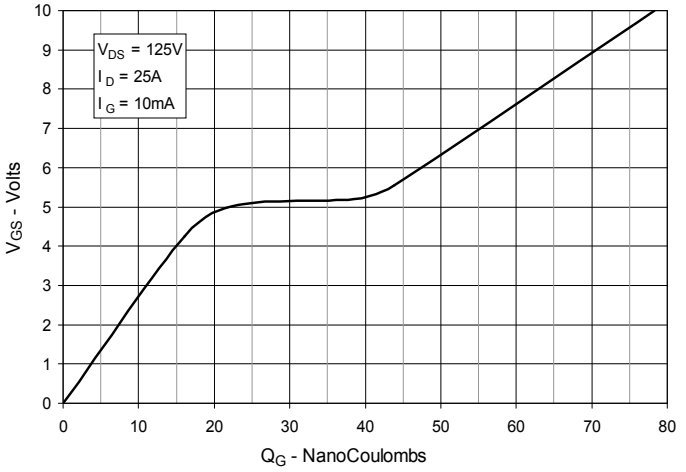

Fig. 11. Capacitance

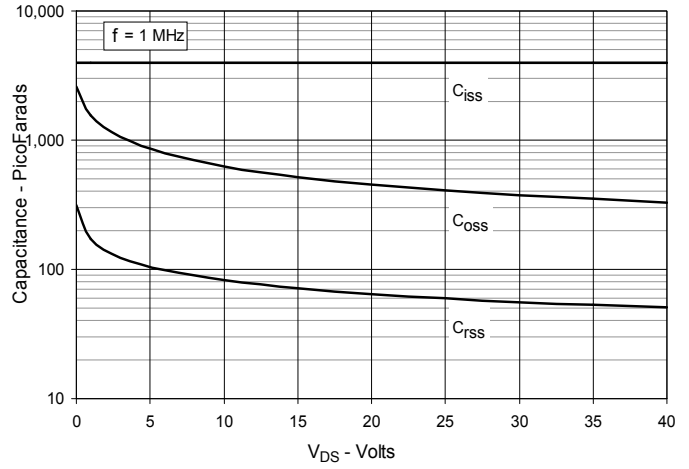

Fig. 12. Maximum Transient Thermal Impedance

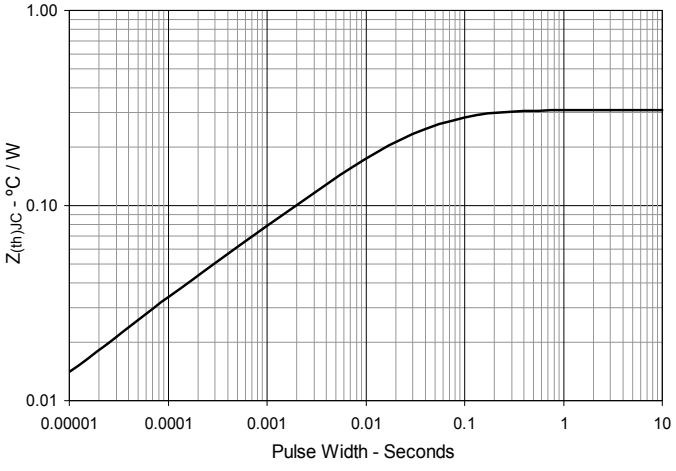

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

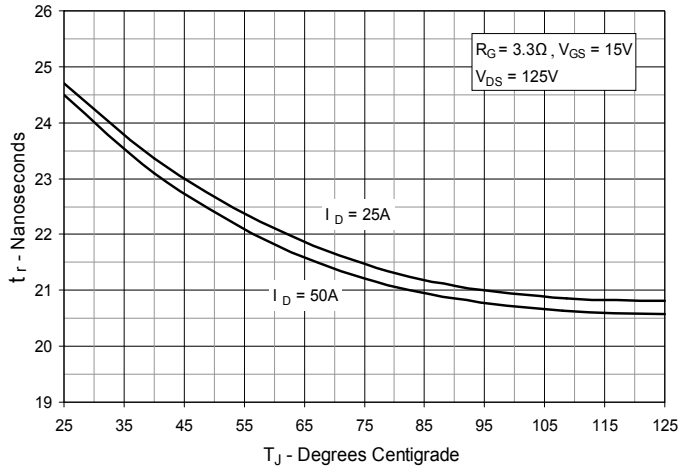

Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

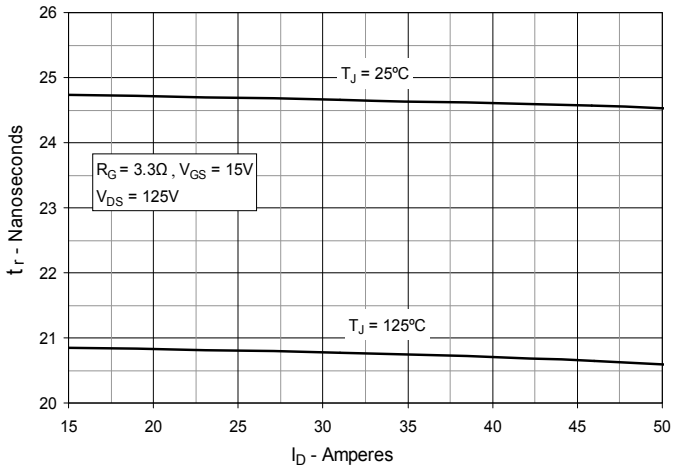

Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

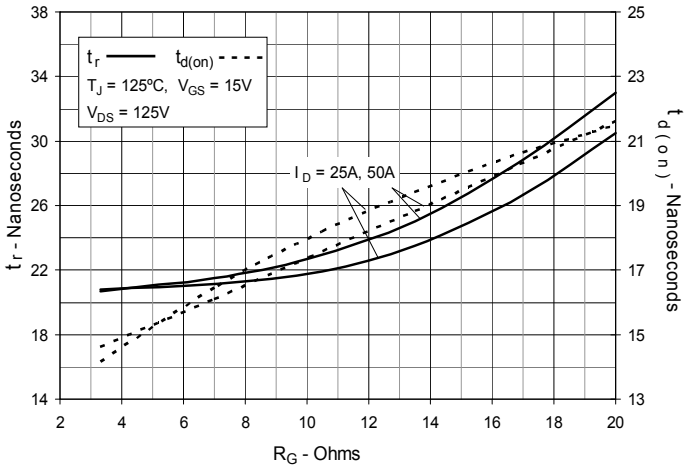

Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

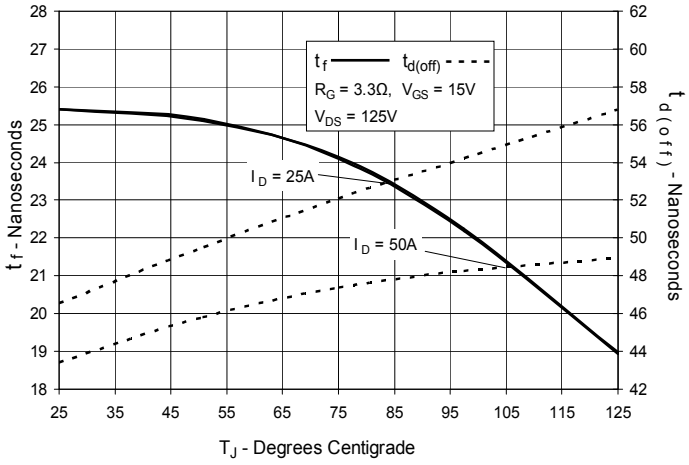

Fig. 17. Resistive Turn-off Switching Times vs. Drain Current

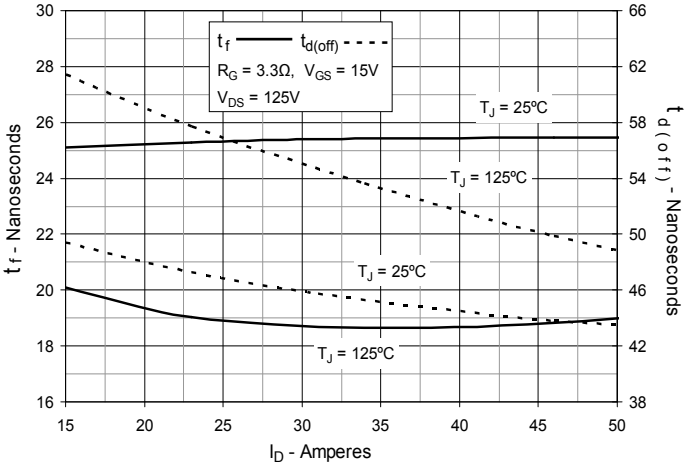

Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance

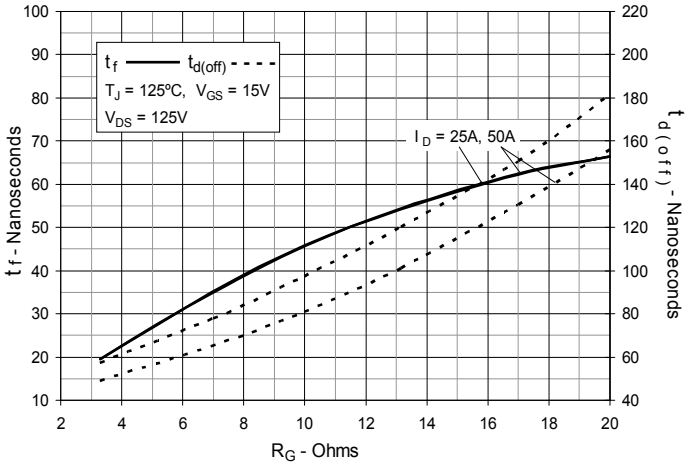

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.