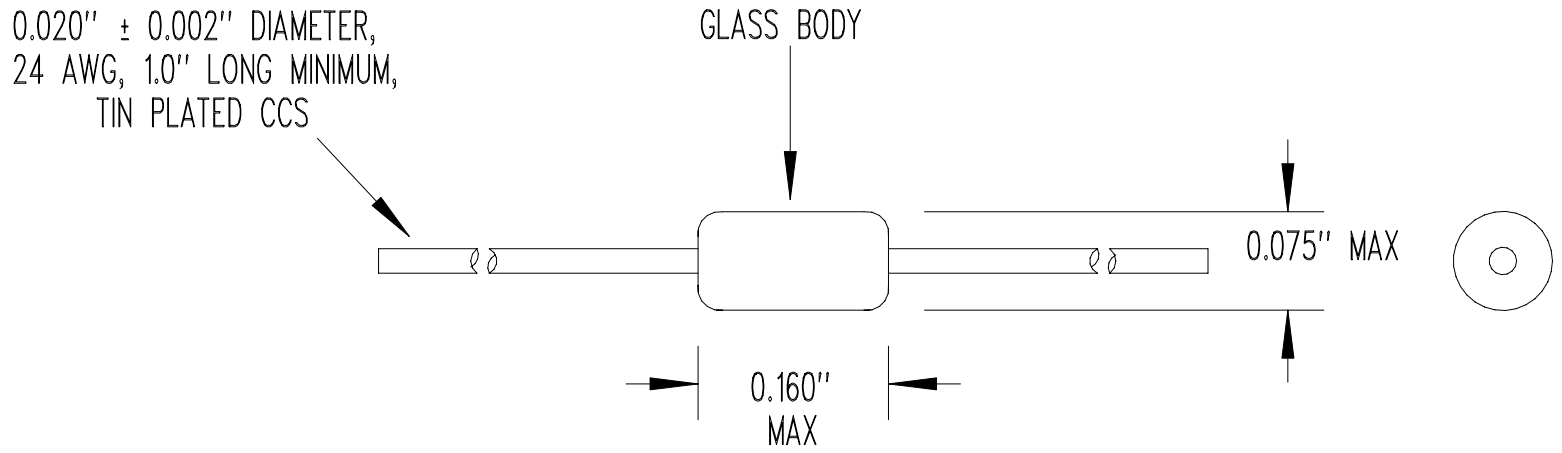

RESISTANCE @ +25°C = 10,000 Ω ± 2%
RESISTANCE/TEMPERATURE CURVE = "J"
BETA "β" (0 TO +50°C) = 3,892°K NOMINAL
TEMPERATURE COEFFICIENT @ +25°C = −4.4%/°C NOMINAL
DISSIPATION CONSTANT = 2 mW/°C NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 5 SECONDS NOMINAL (STILL AIR)
THERMAL TIME CONSTANT = 0.5 SECONDS NOMINAL (STIRRED LIQUID)
MAXIMUM OPERATING TEMPERATURE = +300°C

REV	REVISION RECORD	DATE	APP
---	ISO RELEASE	10/24/03	DD
"A"	LEAD WIRE DIAMETER WAS 0.020" ± 0.001"	10/24/03	DD

SCALE NONE

DRAWN BY
T. SOMERVILLE

DATE 10/26/90

REV. "A"

LAYER 0 OF 1

U.S. SENSOR CORP.
1832 W. COLLINS AVE.
ORANGE, CA. 92867
714-639-1000 www.ussensor.com

NTC THERMISTOR

P/N 103JG1G