CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

PART NO.
GDB63101Z

NOTES:

1. AGENCY INFORMATION:
   UL FILE NO. E309688

2. MATERIALS:
   INSULATOR-THERMOPLASTIC
   CONNECTOR-BRASS

3. TERMINATION:
   LINE: 3/0-350MCM
   LOAD: (2) 2-14 AWG
   (5) 6-14 AWG
   (4) 8-14 AWG

4. RATINGS:
   600V
   MAXIMUM AMP PER POLE-310A

5. TORQUE:
   LINE: 230 IN-LB
   LOAD: 2-14AWG 31 IN-LB
   6-14 AWG 18 IN-LB
   8-14 AWG 18 IN-LB

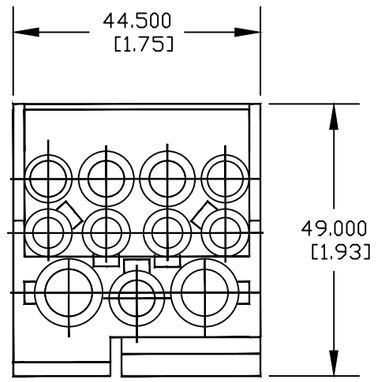

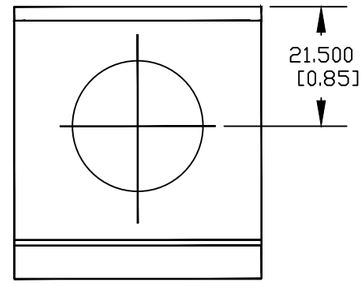

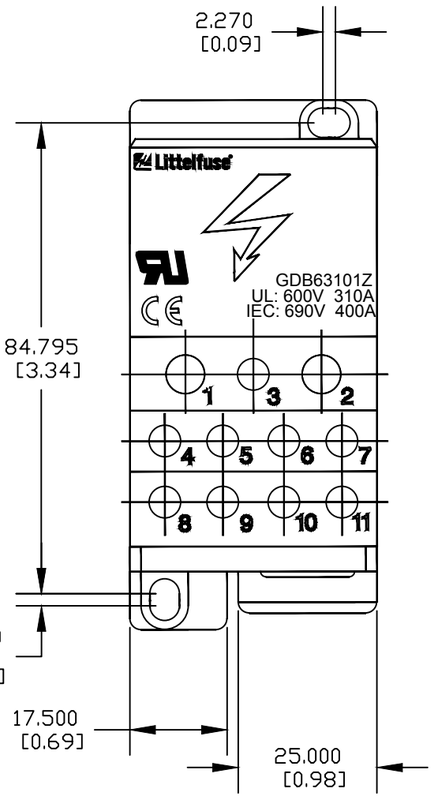

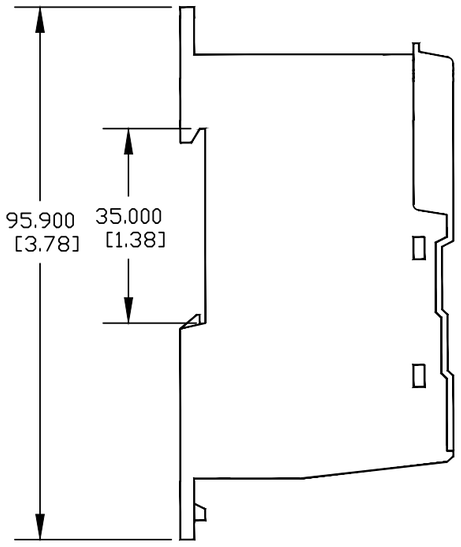

ITEM NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

MATL SPEC	FINISH	SCALE
	NONE	

DRW	DATE	SUPER DRW
M YORK	4/9/18	

CHK	DATE	RAW STK WT
		LBS/M

APPD	DATE	

COPIES TO								
1	9	18						
2	10	19						
3	12	20						
4	13	21						
5	14	23						
6	15	33						
7	16	43						
8	17	53						

TITLE: GDB6310 SERIES DISTRIBUTION BLOCK OUTLINE

Littelfuse®
CHICAGO, ILLINOIS 60631

REVISION: A

DRWG. NO. DL-GDB6310

LTR	REVISION	CHK	APD
A	519180GCP - RELEASE 4/17/18 MRY		

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE

(ST) DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.