

# 159 Series

## Telelink® Fuse and Clip Assembly



### Additional Information



Resources



Accessories



Samples

### Agency Approvals

Agency	Agency File Number	Ampere Range
	E14721	0.5A - 2.0A
	N/A	0.5A - 2.0A
	N/A	0.5A - 2.0A

### Electrical Characteristics for Series

% of Ampere Rating	Opening Time
100%	4 hours, Minimum
250%	1 sec., Minimum 120 secs., Maximum

### Description

The 159 Series product is a metal fuse clip with pre-installed Littelfuse 461 Series TeleLink® fuse. This fuse and clip combination can be automatically installed in PC Boards in one efficient manufacturing operation. It permits quick and easy fuse replacement without exposing the PC Board and other components to risks of rework solder heat as required with direct surface mount fuses.

It meets UL 60950 power cross requirements and is designed to allow compliance with Telcordia GR-1089-CORE and TIA-968-A Surge Specifications. The product provides coordinated protection with Littelfuse SIDACTor® protection thyristors without series resistors.

### Features & Benefits

- Offer low profile easily-replaceable fuse alternative compatible with automated PCB surface mount equipment
- Come supplied with surge resistant Littelfuse 461 series TeleLink® Slo-Blo® fuse
- Fuse designed to allow compliance with Telcordia GR-1089-CORE and TIA-968-A (formerly FCC Part 68) Surge Specifications
- Provide coordinated protection with Littelfuse SIDACTor® protection thyristor devices and GDTs, without series resistors
- RoHS compliant and Halogen Free
- Clip fully compatible with RoHS/lead-free solder alloys and higher temperature profiles associated with lead-free assembly
- Available in ratings of 0.5-2.0 Amperes

### Applications

- Telecom equipment (POTS) applications such as modems, answering machines, telephones, fax machines, and security systems
- Network equipment, such as:
  - SLIC interface portion of Fiber to the Curb (FTTC) and Fiber to the Premises (FTTP)
  - Non-Fiber SLIC interface for Central Office (CO) locations and Remote Terminals (RT)
  - xDSL applications such as ADSL, ADSL2+, VDSL, and VDSL2+
  - Ethernet 10/100/1000BaseT
  - ISDN "U" interface
  - Baystation T1/E1/J1, T3 (DS3) trunk cards

# 159 Series

## Telelink® Fuse and Clip Assembly


### Electrical Specifications by Item

Ampere Rating (A)	Amp Code	Max Voltage Rating (V)	Interrupting Rating	Nominal Cold Resistance (Ohms)	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec)	Agency Approvals		
						CE	UK CA	cUL US
0.50	.500	600	60 A @600 VAC	0.560	0.840 <sup>1</sup>	x	x	x
1.25	1.25	600		.1040	16.5 <sup>1</sup>	x	x	x
2.00	002.	600		.0450	17.5 <sup>1</sup>	x	x	x

**Notes:**<sup>1</sup> I<sup>2</sup>t is calculated at 10 msec. or less. I<sup>2</sup>t at 10 times rated current has a typical value of: 24 A<sup>2</sup>sec (2.0A), 22 A<sup>2</sup>sec (1.25A), 1.3 A<sup>2</sup>sec (0.5A).

- Typical inductance < 40nH up to 500 MHz.
- Resistance changes 0.5% for every °C.
- Resistance is measured at 10% rated current.

### Temperature Re-rating Curve

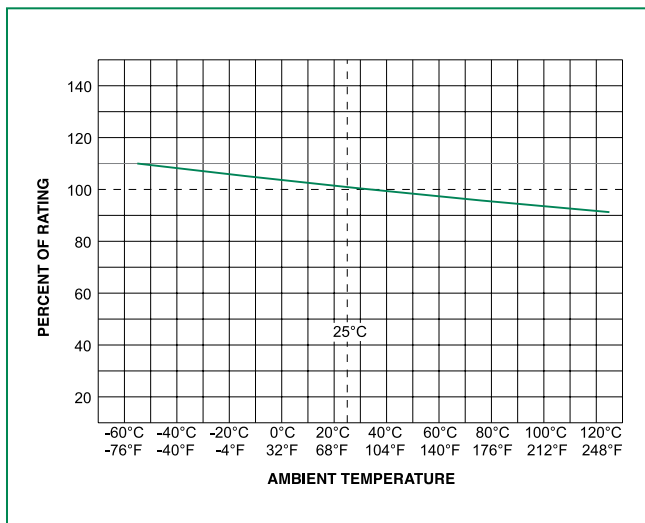


**Note:**  
1. Re-rating depicted in this curve is in addition to the standard re-rating of 25% for continuous operation.

### Maximum Temperature Rise

Telecom Nano <sup>20</sup> Fuse	Temperature
04611.25	≤82°C (180°F)
0461002	≤50°C (122°F)

### Average Time Current Curves

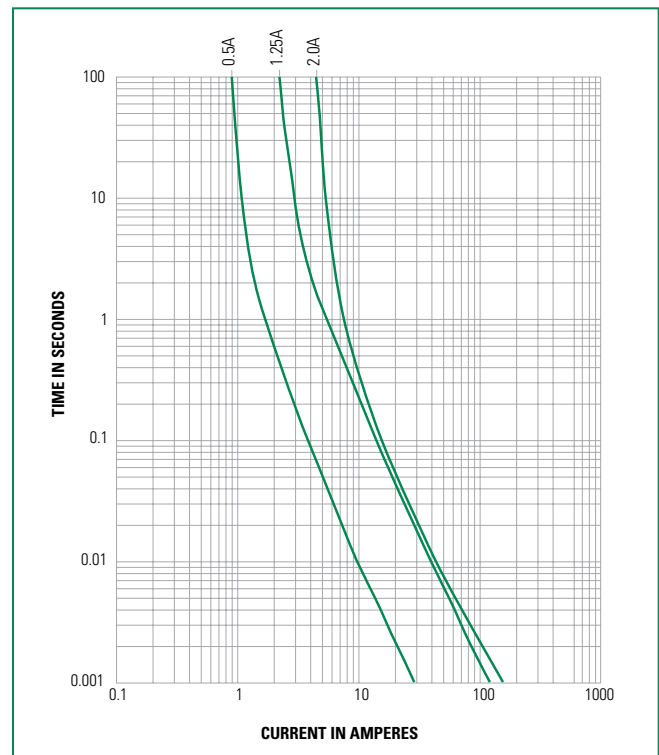

### TIA-968-A (formerly FCC part 68) Surge Waveforms (fuse can not open during type B events)

Surge	Voltage (V)	Waveform (μs)	Current (A)	Repetitions	Recommended Fuse
Metallic A	800	10×560	100	1 ea. polarity	1.25
Longitudinal A	1500	10×160	200	1 ea. polarity	1.25
Metallic B	1000	9×720	25	1 ea. polarity	1.25
Longitudinal B	1500	9×720	37.5	1 ea. polarity	1.25

**Note:** For the type A events the 0.5 fuse will open, providing non-operational compliance. The 1.25 & 2.0 will not open, providing for operational compliance with TIA-968-A type A surge events.

# 159 Series

## Telelink® Fuse and Clip Assembly

### GR 1089 Inter-building requirements

#### GR 1089 1st level lighting surge inter-building

(Equipment under test can not be damaged and must continue to operate properly)

Surge	Minimum Peak Voltage (V)	Minimum Peak Current (A)	Max. Rise/Min. Decay (µs)	Repetitions Each Polarity	Fuse Choices
1	600	100	10/1000	25	1.25, 2.0
2	1000	100	10/360	25	1.25, 2.0
3	1000	100	10/1000	25	1.25, 2.0
4	2500	500	2/10	10	1.25, 2.0
5	1000	25	10/360	5	0.5, 1.25, 2.0

If sufficient series resistance is used, then the 0.5 fuse may be used in test conditions 1-4.

#### GR 1089 AC power fault 1st level inter-building

(fuse not allowed to open)

Test	Vrms	Short Circuit Current (A)	Hits	Duration	Primary Protector	Fuse Choices
1	50	.33	1	15 min.	removed	1.25, 2.0
2	100	.17	1	15 min.	removed	1.25, 2.0
3	200,400, 600	1	60	1 sec.	removed	1.25, 2.0
4	1000	1	60	1 sec.	operative	1.25, 2.0
5	Diagram	Diagram	60	5 secs.	removed	1.25, 2.0
6	600	0.5	1	30 secs.	removed	1.25, 2.0
7	440	2.2	5	2 secs.	removed	1.25, 2.0
8	600	3	1	1.1 secs.	removed	1.25, 2.0
9	1000	5	1	0.4 sec.	in place	1.25, 2.0

#### GR 1089 2nd level lightning surge telecom port

(Equipment under test shall not become a fire, fragmentation, or electrical safety hazard)

Surge	Minimum Peak Voltage (V)	Minimum Peak Current (A)	Max. Rise/Min. Decay (µs)	Repetitions Each Polarity	Fuse Choices
1	5000	500	2/10	1	0.5, 1.25, 2.0
Alternative	5000	500/8=625	8/10	1	0.5, 1.25, 2.0

The 0.5 fuse will open during these test conditions. The 1.25 & 2.0 will not open thus providing operational compliance.

#### GR 1089 AC power fault 2nd level

(fuse can open but must open in a safe and controlled

Test Circuite	Vrms	Short (A)	Duration	Fuse
1	120,277	25	15 min.	0.5, 1.25, 2.0
2	600	60	5 secs.	0.5, 1.25, 2.0
3	600	7	5 secs.	0.5, 1.25, 2.0
4	100-600	2.2	15 min..	0.5, 1.25, 2.0
5	Diagram	Diagram	15 min.	0.5, 1.25, 2.0

Fuse must open before wiring simulator fuse (MDL 2.0).

### UL60950 Requirements

#### UL 60950 (EN 60950, formerly UL 1950) Power Cross Test (L=Longitudinal, M=Metallic)

Test Number	Voltage (V)	Current (A)	Time	Fuse Choices
L1	600	40	1.5 secs.	0.5, 1.25, 2.0
L2	600	7	5 secs.	0.5, 1.25, 2.0
L3	600	2.2	30 min.	0.5, 1.25, 2.0
L4	200	2.2	30 min.	0.5, 1.25, 2.0
L5	120	25	30 min.	0.5, 1.25, 2.0
M1	600	40	1.5 secs.	0.5, 1.25, 2.0
M2	600	7	5 secs.	0.5, 1.25, 2.0
M3	600	2.2	30 min.	0.5, 1.25, 2.0
M4	600	2.2	30 min.	0.5, 1.25, 2.0

Selection of test number depends on current limiting F fire enclosure/spacing of end product

- 26 AWG line cord removes L1/M1 test requirement
  - L5 conducted only if product does not pass section 6.1.2
  - L2,M2,L3,M3,L4,M4 conducted if not in a fire enclosure
- Fuse must open before the wiring simulator fuse (MDL 2.0).

#### UL 60950 (EN 60950, formerly UL 1950) Impulse Test and Steady-State Electric Strength Test


Test	Voltage (V)	Current (A)	Waveform	Repetitions	Fuse Choices
<b>Impulse</b>					
For handheld units	2500	62.5	10x700ms	+ 10 w/60 secs. rest	0.5, 1.25, 2.0
Non handheld	1500	37.5	10x700ms	+ 10 w/60 secs. rest	0.5, 1.25, 2.0
<b>Steady-State</b>					
For handheld units	1500		60Hz		0.5, 1.25, 2.0
Non handheld	1000		60Hz		0.5, 1.25, 2.0

# 159 Series

## Telelink® Fuse and Clip Assembly

### Soldering Parameters


<b>Reflow Condition</b>		Pb – free assembly
<b>Pre Heat</b>	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (Min to Max) ( $t_s$ )	60 – 120 seconds
<b>Average Ramp-up Rate (Liquidus Temp (<math>T_L</math>) to peak)</b>		3°C/second max.
<b><math>T_{s(max)}</math> to <math>T_L</math> - Ramp-up Rate</b>		3°C/second max.
<b>Reflow</b>	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Temperature ( $t_L$ )	60 – 90 seconds
<b>Peak Temperature (<math>T_p</math>)</b>		260 <sup>+0/-5</sup> °C
<b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>		20 – 40 seconds
<b>Ramp-down Rate</b>		6°C/second max.
<b>Time 25°C to peak Temperature (<math>T_p</math>)</b>		8 minutes max.
<b>Do not exceed</b>		260°C

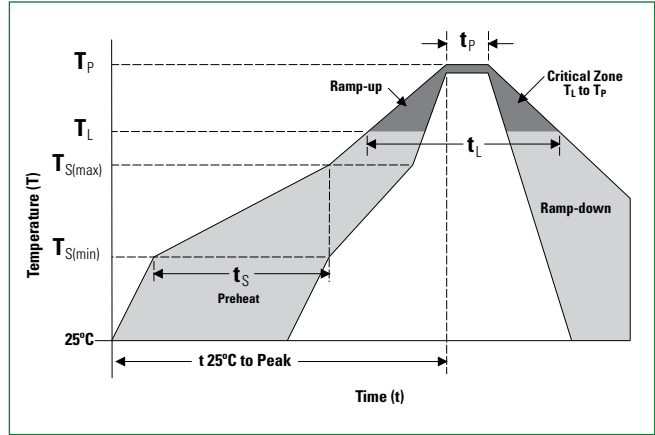



### Product Characteristics

<b>Materials</b>	<b>Fuse Body:</b> Ceramic <b>Fuse Caps/Terminals:</b> Silver-plated Brass <b>Clip Base:</b> Gold-plated <b>Clip Terminals:</b> Nickel-plated
<b>Product Marking</b>	Brand Logo, Current Rating, 'T'
<b>Insulation Resistance (after opening)</b>	MIL-STD-202, Method 302, Test condition A (10,000 ohms, minimum)
<b>Operating Temperature</b>	-55°C to 125°C with proper re-rating
<b>Humidity Test</b>	85°C/ 85% RH, 1000 hours
<b>Solderability</b>	MIL-STD-202, Method 208/IPC EIA J-STD-002, Test Condition A
<b>Resistance to Solvents</b>	MIL-STD-202, Method 215 (3 solvent types)
<b>Thermal Shock</b>	MIL-STD-202, Method 107, Test Condition B3 (95 cycles -65°C to +125°C)
<b>Mechanical Shock</b>	MIL-STD-202, Method 213, Test Condition I (100G's peak for 6 msecs.)
<b>Vibration</b>	MIL-STD-202, Method 201, (10-55 Hz)
<b>Moisture Resistance</b>	MIL-STD-202, Method 106, High Humidity (90-98% RH), Heat (65°C)
<b>Salt Spray/Atmosphere</b>	MIL-STD-202, Method 101, Test Condition B (48 hours)
<b>Terminal Attachment</b>	MIL-STD-202, Method 211, Test Condition A, 5 lbs applied to end caps

### Part Numbering System

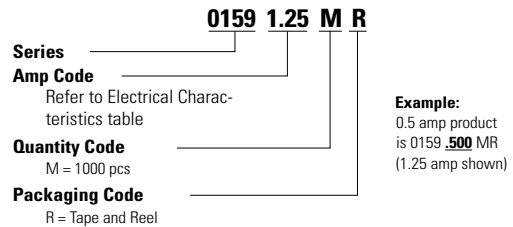

### Dimensions

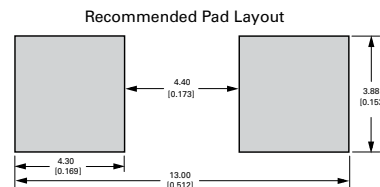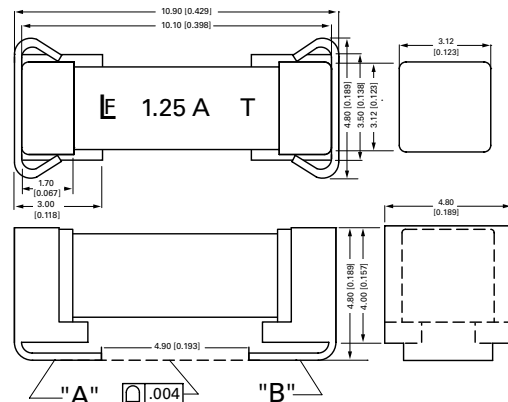

### Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code
24mm Tape and Reel	EIA-481, IEC 60286-3	1000	MR

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).