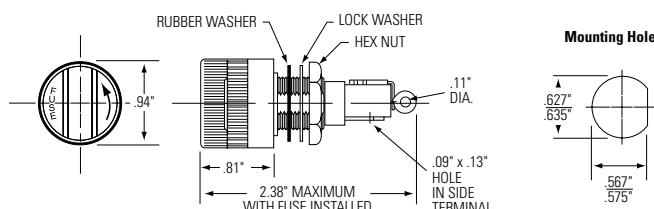


**344 Series**

Blown Fuse Indicating Holders for 3AG and 3AB Fuses

**Web Resources**Download ECAD models, order samples, and find technical resources at [www.littelfuse.com](http://www.littelfuse.com)**Product Characteristics**

Compatible Fuses	3AG, 3AB
<b>Electrical</b>	Rated at 20 amperes at lamp voltage shown below. Dielectric: withstanding voltage exceeds 1500 volts. All fuseholders are supplied with a resistor. When designing indicating type fuseholders into a circuit, consideration should be given to the resistance of fractional amperage fuses and the parallel resistance of the indicator lamp and 7its resistor.
<b>Mounting</b>	Withstands 15 lb.-in. mounting torque. Maximum panel thickness is .250".
<b>Molded Parts</b>	Black Body and knob are thermoset (UL94 V-0), except lens is thermoplastic (UL 94HB). See Table below for lens color.
<b>Knob</b>	Bayonet style.
<b>Terminals</b>	Copper & copper alloy. Tin plated.
<b>Ambient Temperature</b>	-40°C to +85°C.
<b>Hardware</b>	Neoprene washer, lockwasher & hex nut unassembled. O-ring option available must be ordered separately using part number 901-108.

\* Refer to [Fuseology](#) for information on proper fuseholder re-rating.**Dimensions****Agency Approvals**

Agency	Agency File Number
	E14721

**Ordering Information**

Order Part number	Catalog Number	Voltage Range	Lamp Type Rating	Lamp Current Rear Panel	Lens Color
03440024H	344 024	16 to 32	28V Incandescent	.04 amp	Amber
03440125H	344 125	100 to 125	Neon	.002 amp	Clear
03440250H	344 250	200 to 250	Neon	.002 amp	Clear

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).