

DCNHF800MH Series

1800V DC Max Contactor Relays



Description

Designed for electric vehicle and industrial applications, the DCNHF800MH Series high-voltage DC contactor is suitable for battery power supply, charging systems, motor control, circuit insulation, circuit protection, and industrial safety devices. Rated for 800A continuous current and up to 1800V operating voltage, its non-polarized contacts ensure this contactor is a match for a variety of electrical systems.

Its double-coil economizer minimizes power consumption once the contactor is engaged, reducing heat generation and improving overall efficiency and reliability. While the corrosion-resistant resin housing provides reliable performance in harsh environments. Sealed contacts prevent electrical arc leakage for maximum safety, and the bottom-mount contactor can be installed in any orientation for flexible system integration.

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/DCNHF800MH

Ordering Information

PART NUMBER	RATED CURRENT(A)	POLARIZED	AUX. CONTACT	COIL VOLTAGE(VDC)	MOUNTING	POWER CONNECTION
DCNHF800MH12-F	800	No	Yes	12	Bottom	Internal Thread
DCNHF800MH24-F	800	No	Yes	24	Bottom	Internal Thread

Specifications

Rating Continuous Current:	800A
Contact Max. Voltage:	1800V DC
Contact Circuitry:	SPST NO
Ingress Protection:	Contact IP67
Contacts Material:	Copper Alloy
Terminals:	M8 Copper
Contact Torque:	M8 Bolt: 12~15N-m
Housing:	Nylon UL 94 V-0
Coil Connector:	Yazaki 7283-1044 (compatible option)
Coil Type:	Double
Mounting Method:	M5 Bolt
Mounting Torque:	M5 Bolt: 3~4N-m
Normal Position:	Any Mounting Position
Approvals:	
UL File Number:	E47258 Recognized
CE:	EN 60947-4-1,2018

Applications

- Battery Electric Vehicles
- Hybrid Electric Vehicles
- Material Handling
- Electric Maintenance and Transport Vehicles
- Industrial Applications
- Energy Storage Applications

Features and Benefits

- High voltage (1800V) contactor for EV applications
- Resin housing provides corrosion resistance in harsh automotive environments
- Sealed contacts with no leakage of electrical arc for maximum safety
- Non-polarized contacts for flexible system integration
- No mounting orientation restrictions
- Auxiliary contact for system signaling and control
- Ceramic arc chamber enables higher contact voltage capability
- RoHS and REACH compliant

DCNHF800MH Series

1800V DC Max Contactor Relays


Performance Data

MAIN CONTACT	
Contact Arrangement	1 Form, SPST-NO
Operating Voltage	6~1800VDC
Continous Current	800A
Max Short Circuit	8000A, 15ms
Max Breaking Limit	2000A@1000VDC, 1cycle, 1000A@1500VDC, 1cycle,
Dielectric Withstanding Voltage	Between open contacts: 4000VAC, ≤1mA,1min Between contact and coil : 4000VAC, ≤1mA,1min
Insulation Resistance	Min. 1000 MΩ@1000VDC
Contact Voltage Drop	≤0.2mΩ@800A

COIL DATA		
Rating Voltage	12VDC	24VDC
Voltage (Max.)	16VDC	32VDC
Pickup Voltage (25°C)	≤8VDC	≤16VDC
Release Voltage (25°C)	≥1.2VDC	≥2.4VDC
Starting Current (25°C)	≤4.2A	≤2.1A
Starting Power (25°C)	50W	50W
Holding Current (25°C)	≤0.42A	≤0.21A
Holding Power (25°C)	5W	5W

Note: This product is a double-coil, and the coil control voltage must be a step voltage. A slowly rising voltage can not make the contactor work.

Carry Current vs Time at 65°C Chart

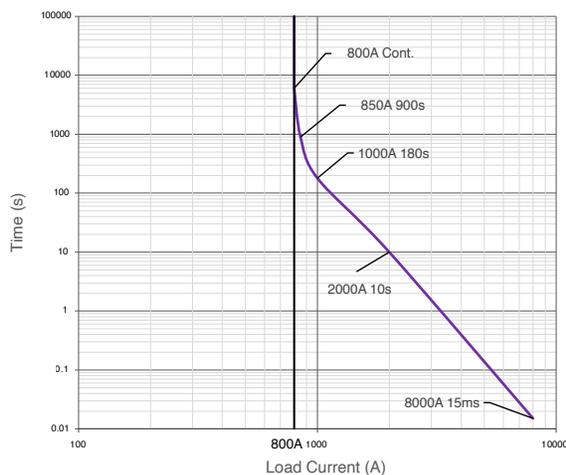

LIFE	
Electrical Life (Resistive)	300 cycles, Only Break 800A@1000VDC 20 cycles, Only Break 800A@1500VDC 6000 cycles, 100A@1800VDC
Mechanical Life	200,000 cycles


Note: Electrical life rating is based on resistive load with 27μH maximum inductance in circuit. Because your application may be different, we suggest you test the contactor in your circuit to verify life is as required.

OPERATE / RELEASE TIME	
Pickup Time (includes bounce)	≤50ms
Release Time	≤30ms

ENVIRONMENTAL DATA	
Shock, 11ms ½ Sine, Operating	20g, Peak
Vibration, Sine	55~2000Hz, 5g, Peak
Operating Temperature	-40°C~+85°C
Humidity	5%~85%RH
Weight	1100g

AUX. CONTACT	
Aux. Contact Arrangement	1 Form A
Aux. Contact Current Max.	2A@24VDC
Aux. Contact Current Min.	5mA@12VDC
Max. Contact Resistance	300mΩ


Electrical Diagram



DCNHF800MH Series

1800V DC Max Contactor Relays

Part Number System

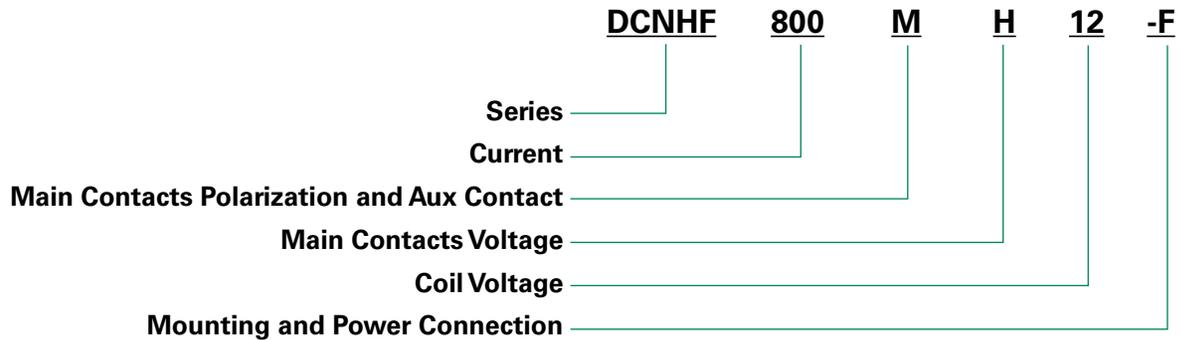

MAIN CONTACTS POLARIZATION AND AUX CONTACT		
	POLARIZED?	INCLUDE AUX CONTACT?
M:	No	Yes

MAIN CONTACT TEST VOLTAGE		
H:	1000	V DC

COIL VOLTAGE		
12:	12	V DC
24:	24	V DC

MOUNTING		POWER CONNECTION
F:	Bottom	Internal Thread

- Be sure to use washer to prevent screws from loosening, all the terminals or copper bar must be in direct contact with the contactor's terminals. Screw tightening torque is specified below. Exceeding the maximum torque can lead to product failure.
 - Contact torque: in (12~15) N.m.
 - Mounting torque: in (3~4) N.m.
- Contact terminals are non-polarized, Coil terminals are polarized, so refer to drawing during connecting. We suggest using a varistor rather than diode as a surge protector.
- Do not use if dropped.
- Avoid installing in a strong magnetic field (close to a transformer or magnet), or near a heat source.
- Electrical life

Use per load capability and life cycle limits so as not to cause a function failure (treat the contactor as a product with specified life and replace it when necessary). It is possible to make parts burn around the contactor once operating failure occurs. It is necessary to take layout into account and to make sure power shall be cut off within 1 second.

- Lifetime of internal gas diffusion

The contactor is sealed and filled with gas, lifetime of gas diffusion is determined by temperature in contact chamber (ambient temperature + temperature generated by contact operation). Operate only in an ambient temperature from -40°C to +85°C.
- Drive power must be greater than coil power or it will reduce performance capability.
- Avoid debris or oil contamination on the main terminals to optimize contact and avoid excess heat generation.
- Applications with capacitors will require a pre-charge circuit.