OBSOLETE


IXYS

GenX3™ 600V IGBTs w/ Diode

IXGH30N60C3D1
IXGT30N60C3D1*


*Obsolete Part Number

High-Speed PT IGBTs for 40-100 kHz Switching




V_{CES} = 600V
I_{C110} = 30A
$V_{CE(sat)}$ ≤ 3.0V
$t_{fi(typ)}$ = 47ns

TO-268 (IXGT)



TO-247 (IXGH)



G = Gate C = Collector
E = Emitter Tab = Collector

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_C = 25°C to 150°C	600	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	60	A
I_{C110}	T_C = 110°C	30	A
I_{F110}	T_C = 110°C	30	A
I_{CM}	T_C = 25°C, 1ms	150	A
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 125°C, R_G = 5Ω Clamped Inductive Load	I_{CM} = 60 @ ≤ V_{CES}	A
P_C	T_C = 25°C	220	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062 in.) from Case for 10s	300	°C
T_{SOLD}	Plastic Body for 10 seconds	260	°C
M_d	Mounting Torque (TO-247)	1.13/10	Nm/lb.in.
Weight	TO-268	4	g
	TO-247	6	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.0		5.5	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			75	μA
	T_J = 125°C			1	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ± 20V			±100	nA
$V_{CE(sat)}$	I_C = 20A, V_{GE} = 15V, Note 1		2.6	3.0	V
	T_J = 125°C		1.8		V

Features

- Optimized for Low Switching Losses
- Square RBSOA
- Anti-Parallel Ultra Fast Diode
- International Standard Packages

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- High Frequency Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

© 2011 IXYS CORPORATION, All Rights Reserved

IXYS

IXGH30N60C3D1
IXGT30N60C3D1

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 20A, V_{CE} = 10V, Note 1	9	30		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		915		pF
C_{oes}			78		pF
C_{res}			32		pF
Q_g	I_C = 20A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		38		nC
Q_{ge}			8		nC
Q_{gc}			17		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		16		ns
t_{ri}	I_C = 20A, V_{GE} = 15V		26		ns
E_{on}	V_{CE} = 300V, R_G = 5Ω		0.27		mJ
$t_{d(off)}$	Note 2		42	75	ns
t_{fi}			47		ns
E_{off}			0.09	0.18	mJ
$t_{d(on)}$	**Inductive load, T_J = 125°C**		17		ns
t_{ri}	I_C = 20A, V_{GE} = 15V		28		ns
E_{on}	V_{CE} = 300V, R_G = 5Ω		0.44		mJ
$t_{d(off)}$	Note 2		70		ns
t_{fi}			90		ns
E_{off}			0.33		mJ
R_{thJC}				0.56	°C/W
R_{thCS}	TO-247		0.21		°C/W


Reverse Diode (FRED)

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
V_F	I_F = 30A, V_{GE} = 0V, Note 1			2.7	V
	T_J = 150°C		1.6		V
I_{RM}	I_F = 30A, V_{GE} = 0V, -di_F/dt = 100A/µs, T_J = 100°C			4	A
t_{rr}	V_R = 100V T_J = 100°C		100		ns
	I_F = 1A, -di/dt = 100A/µs, V_R = 30V		25		ns
R_{thJC}				0.9	°C/W

Notes:

1. Pulse test, t ≤ 300µs, duty cycle, d ≤ 2%.
2. Switching times & energy losses may increase for higher V_{CE}(Clamp), T_J or R_G.


TO-268 Outline

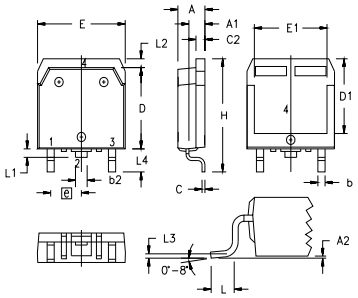

Terminals: 1 - Gate 2,4 - Collector
3 - Emitter

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

TO-247 Outline

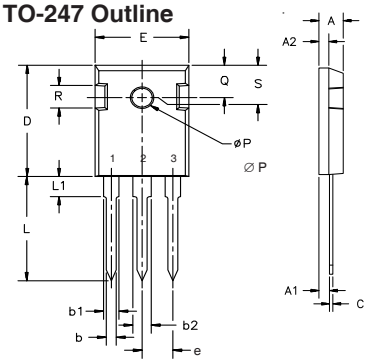

Terminals: 1 - Gate 2 - Collector
3 - Emitter

Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

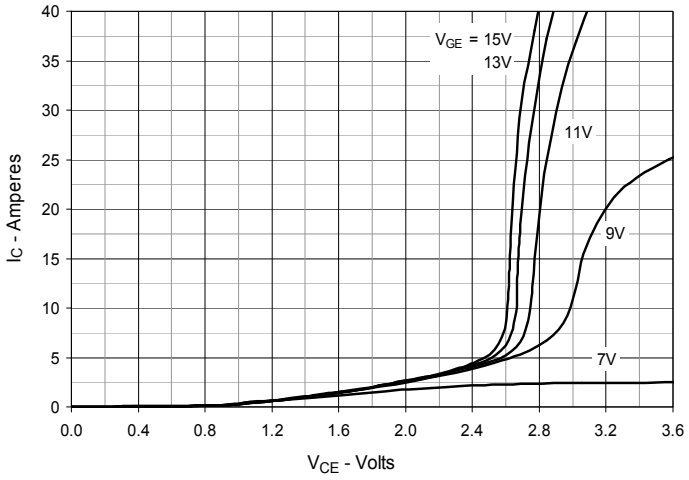


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

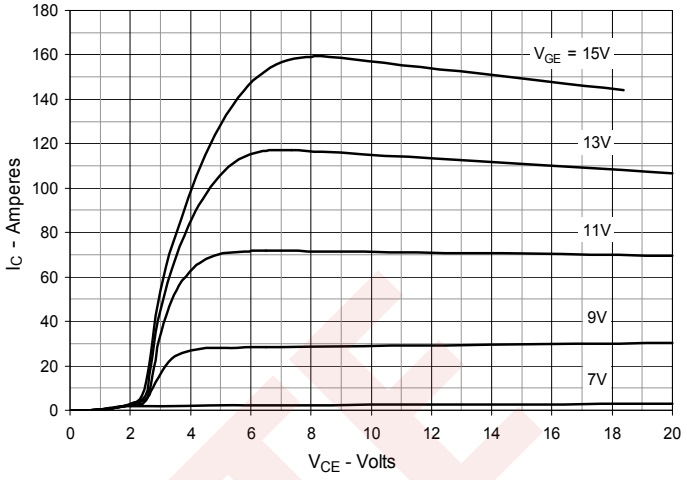


Fig. 3. Output Characteristics @ T_J = 125ºC

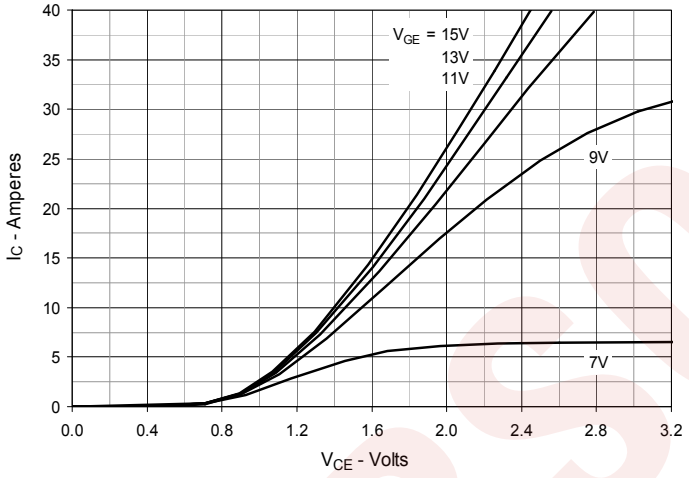


Fig. 4. Dependence of $V_{CE(sat)}$ on JunctionTemperature

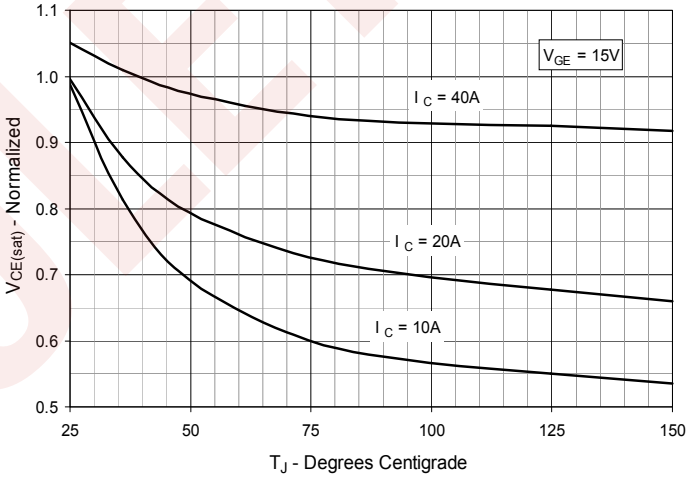


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage


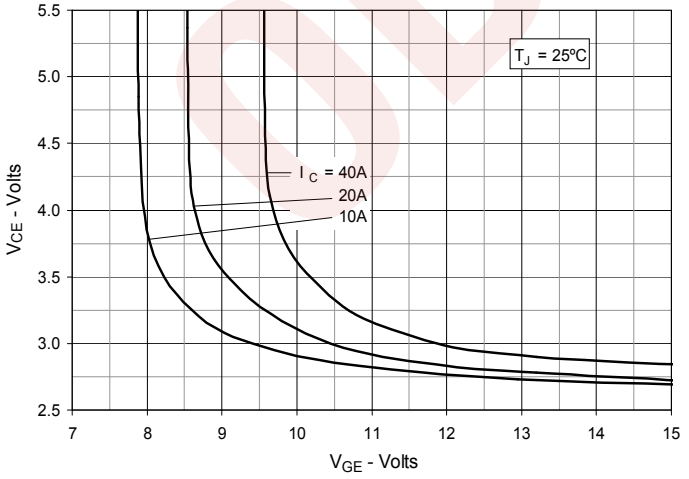


Fig. 6. Input Admittance

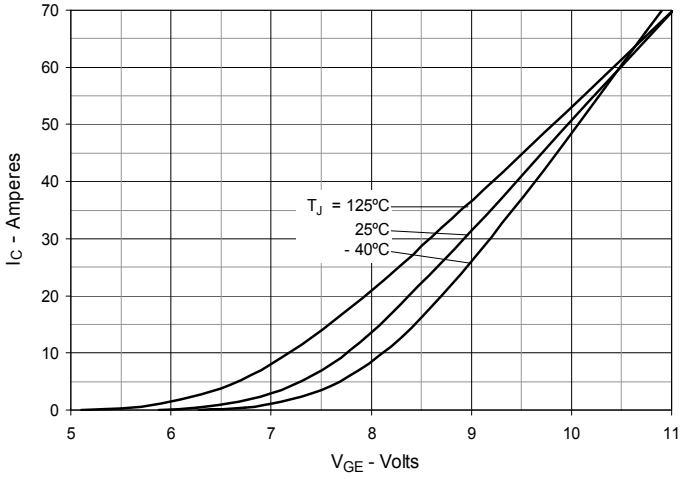

© 2011 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

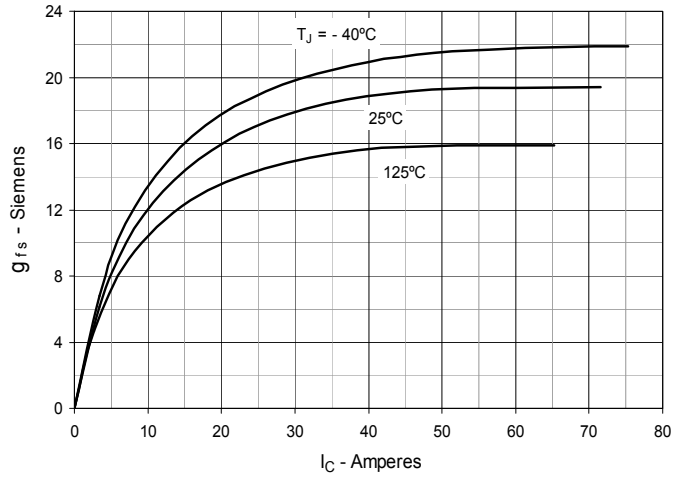


Fig. 8. Gate Charge

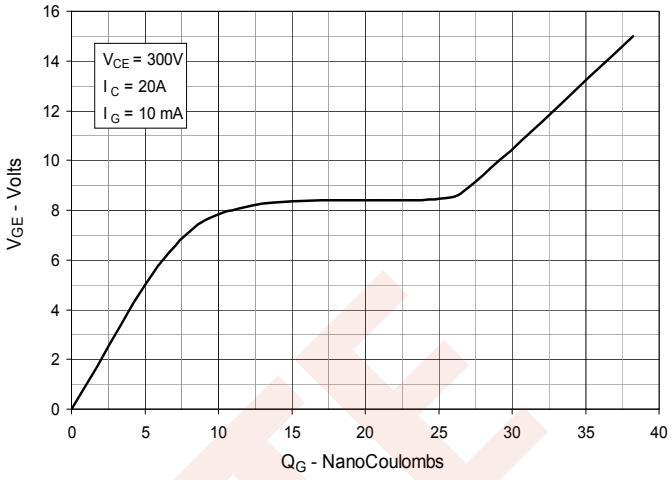


Fig. 9. Capacitance

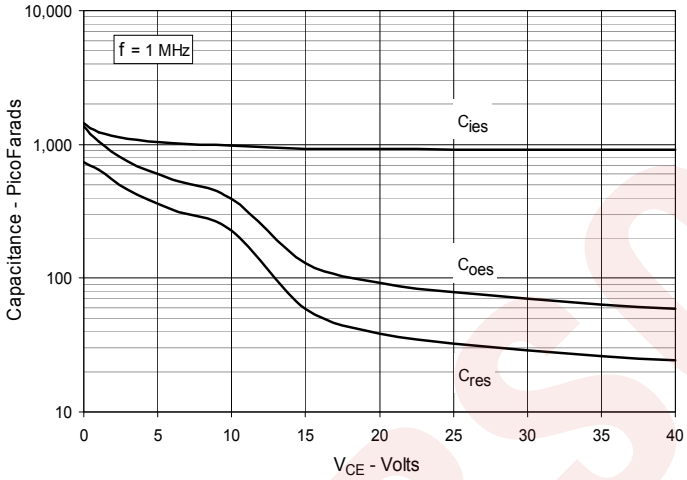


Fig. 10. Reverse-Bias Safe Operating Area


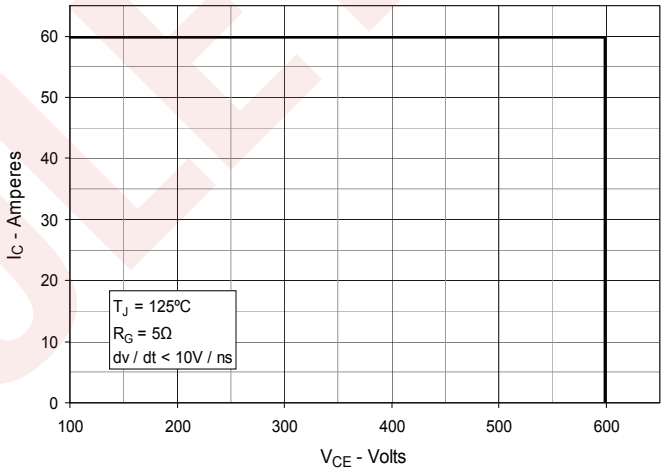


Fig. 11. Maximum Transient Thermal Impedance

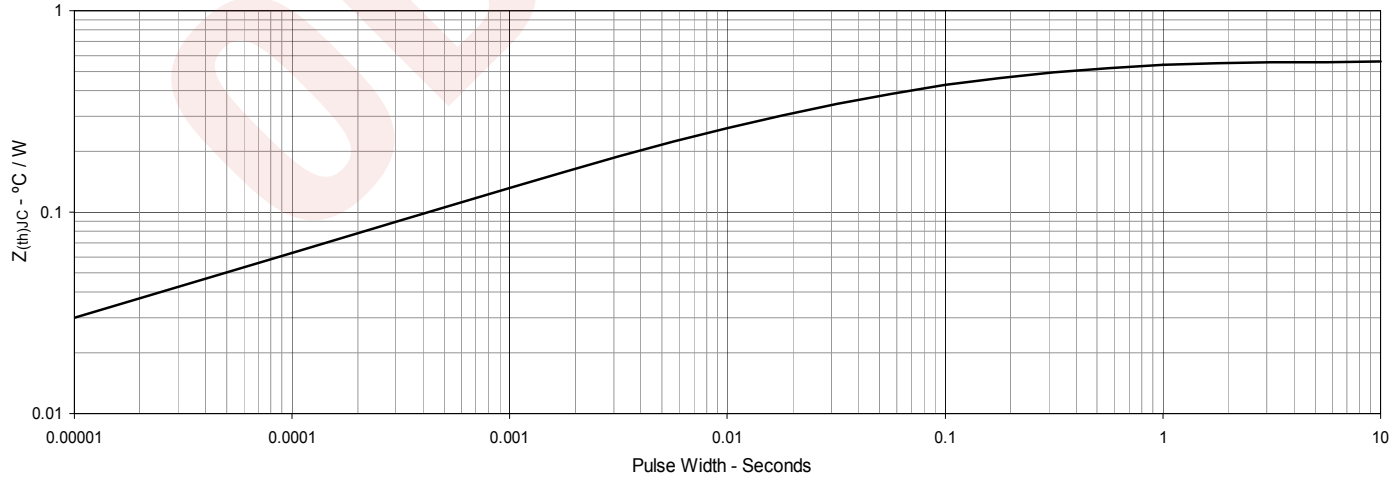

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

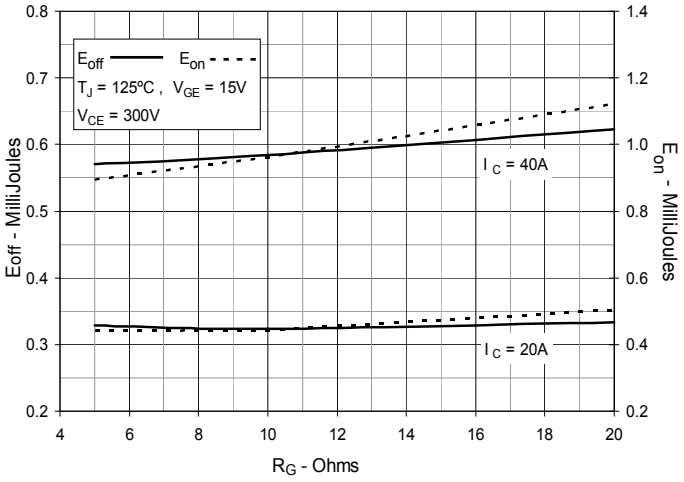


Fig. 13. Inductive Switching Energy Loss vs. Collector Current

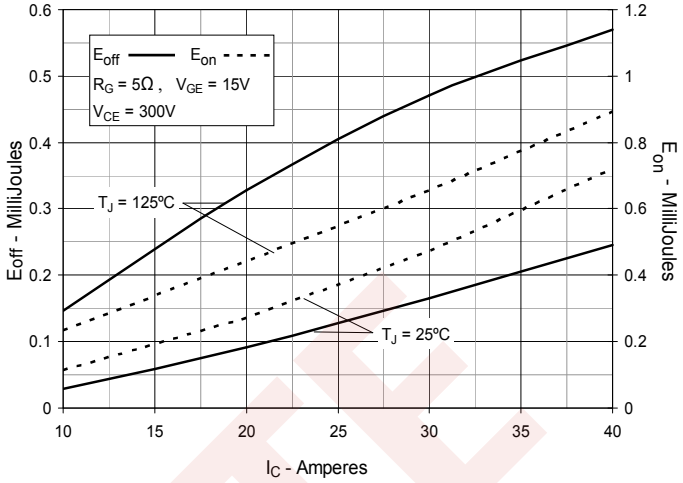


Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

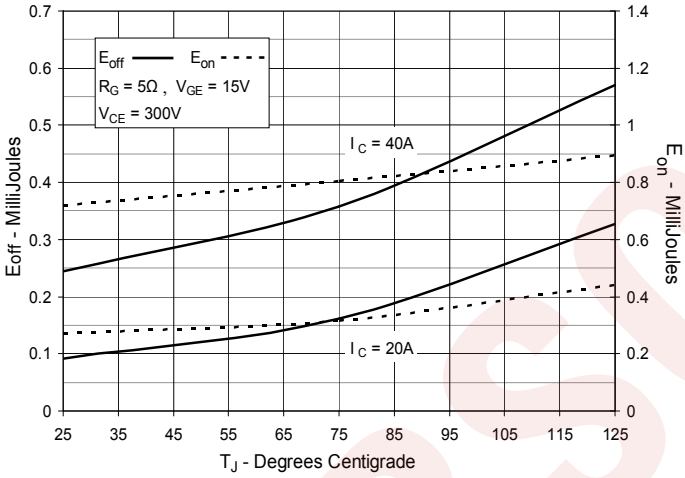


Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

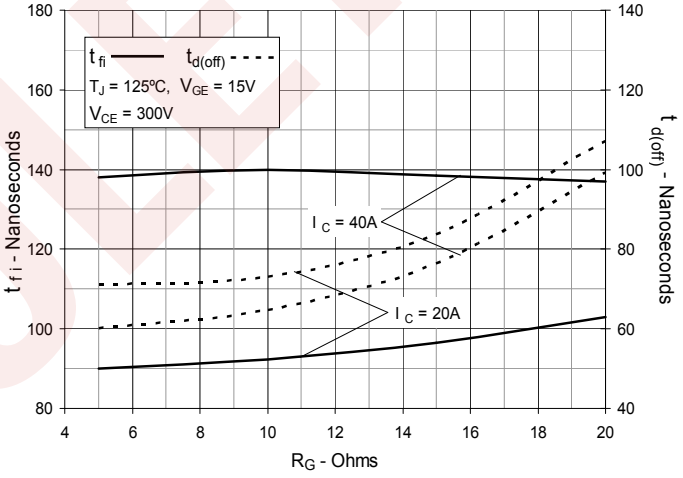


Fig. 16. Inductive Turn-off Switching Times vs. Collector Current


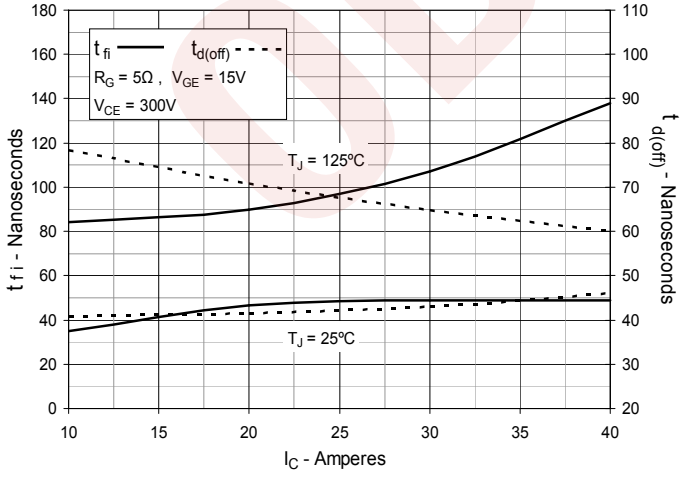


Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

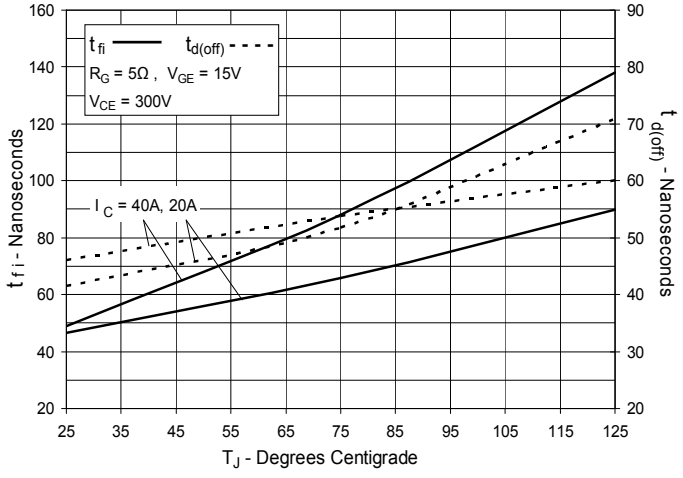

© 2011 IXYS CORPORATION, All Rights Reserved

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

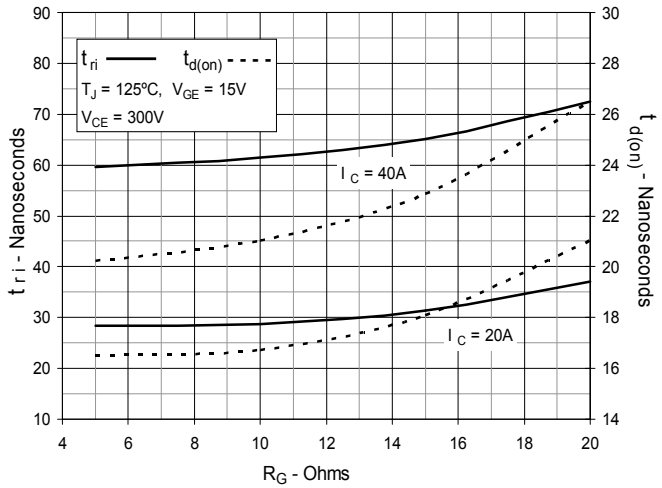


Fig. 19. Inductive Turn-on Switching Times vs. Collector Current


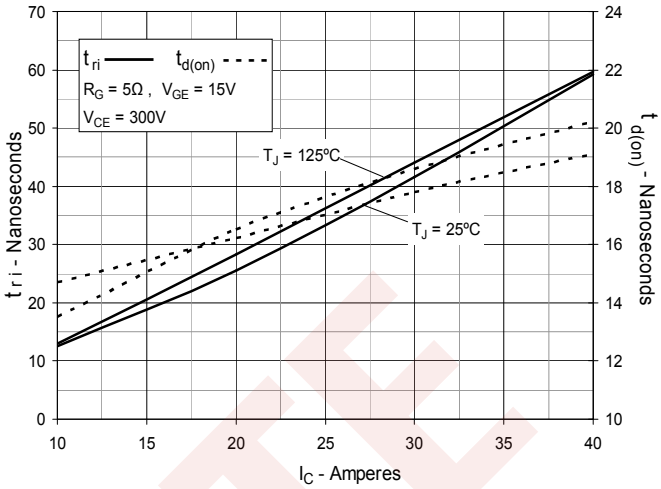


Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

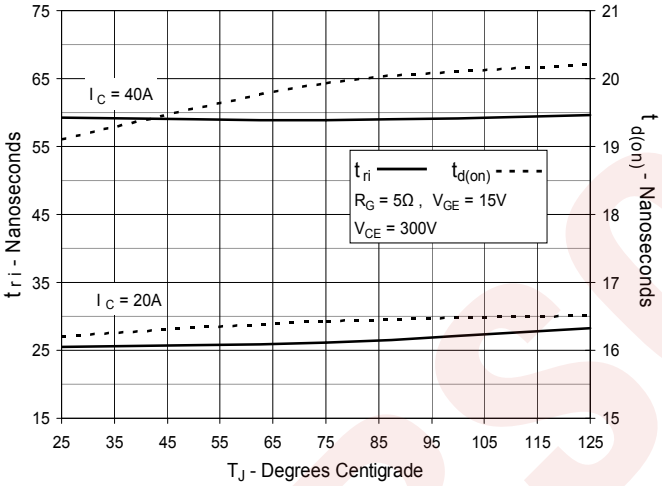

OBSOLETE

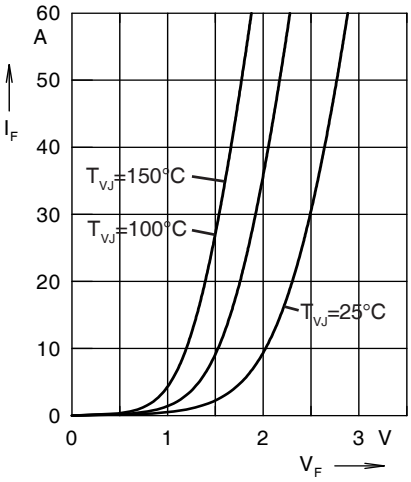


Fig. 21. Forward current I_F versus V_F

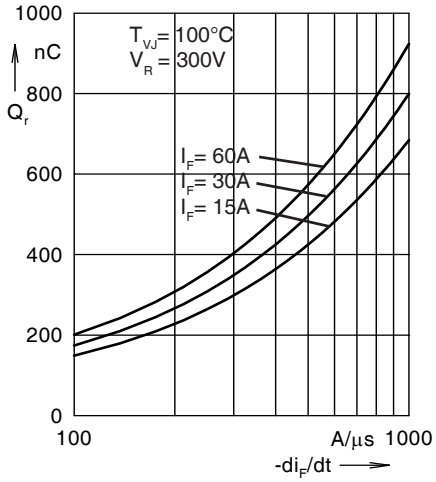


Fig. 22. Reverse recovery charge Q_r versus -di_F/dt

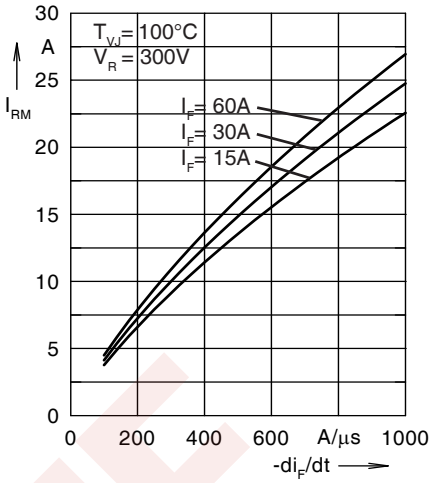


Fig. 23. Peak reverse current I_{RM} versus -di_F/dt

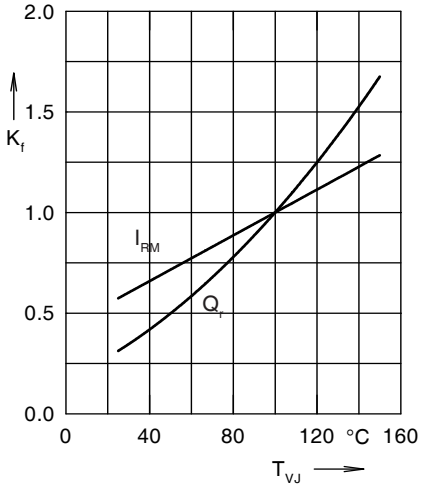


Fig. 24. Dynamic parameters Q_r, I_{RM} versus T_{VJ}

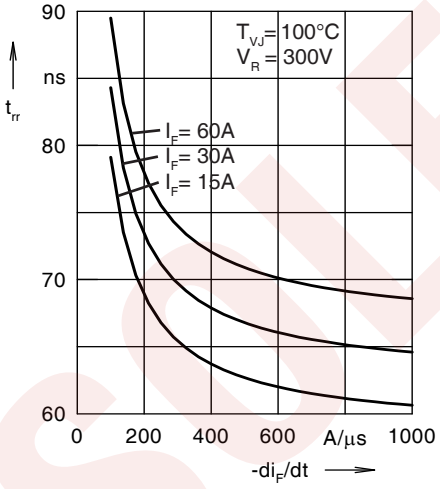


Fig. 25. Recovery time t_{rr} versus -di_F/dt

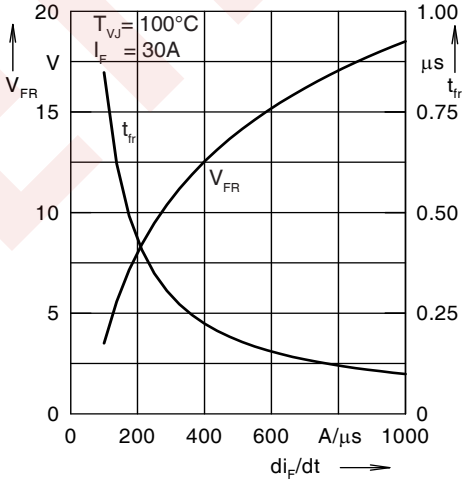


Fig. 26. Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

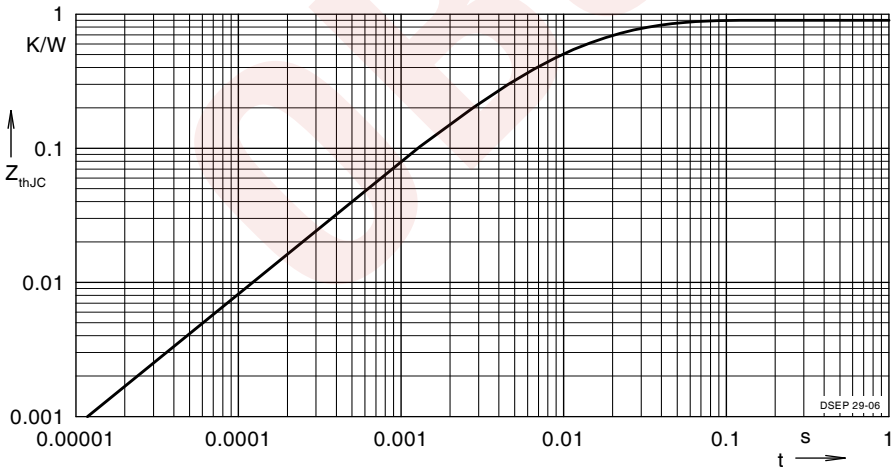


Fig. 27. Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.502	0.0052
2	0.193	0.0003
3	0.205	0.0162

© 2011 IXYS CORPORATION, All Rights Reserved

OBSOLETE

OBSOLETE

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.