


High Voltage Standard Rectifier Module

3~ Rectifier	Brake Chopper
$V_{RRM} = 2200 \text{ V}$	$V_{CES} = 1700 \text{ V}$
$I_{DAV} = 360 \text{ A}$	$I_{C25} = 200 \text{ A}$
$I_{FSM} = 1900 \text{ A}$	$V_{CE(sat)} = 2,1 \text{ V}$

3~ Rectifier Bridge + Brake Unit + NTC


Part number

MDNA360UB2200PTED

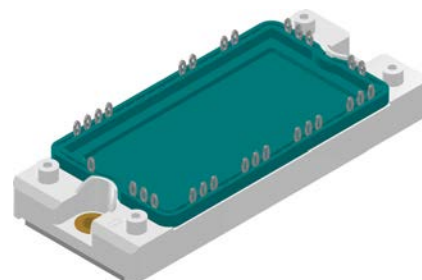

Backside: isolated

 E72873

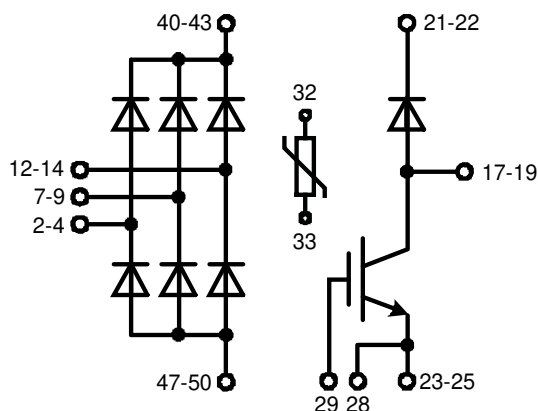

Features / Advantages:

- Brake with Infineon IGBT³

Applications:

- 3~ Rectifier with brake unit for drive inverters

Package: E2-Pack

- Isolation Voltage: 4300 V~
- Industry standard outline
- RoHS compliant
- PressFit-Pins for PCB mounting
- Height: 17 mm
- Base plate: Copper internally DCB isolated
- Advanced power cycling
- Phase Change Material available

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				2300	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				2200	V
I_R	reverse current	$V_R = 2200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			100	μA
		$V_R = 2200\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			3	mA
V_F	forward voltage drop	$I_F = 120\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1,25	V
		$I_F = 360\text{ A}$				1,80	V
		$I_F = 120\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			1,23	V
		$I_F = 360\text{ A}$				1,98	V
I_{DAV}	bridge output current	$T_C = 85^{\circ}\text{C}$ rectangular	$T_{VJ} = 150^{\circ}\text{C}$ $d = \frac{1}{3}$			360	A
V_{F0}	threshold voltage	} for power loss calculation only		$T_{VJ} = 150^{\circ}\text{C}$		0,82	V
r_F	slope resistance					3,4	m Ω
R_{thJC}	thermal resistance junction to case					0,25	K/W
R_{thCH}	thermal resistance case to heatsink				0,1		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				500	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			1,90	kA
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			2,05	kA
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			1,62	kA
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			1,75	kA
I^2t	value for fusing	$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 45^{\circ}\text{C}$			18,1	kA ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			17,5	kA ² s
		$t = 10\text{ ms; (50 Hz), sine}$	$T_{VJ} = 150^{\circ}\text{C}$			13,0	kA ² s
		$t = 8,3\text{ ms; (60 Hz), sine}$	$V_R = 0\text{ V}$			12,7	kA ² s
C_J	junction capacitance	$V_R = 400\text{ V; } f = 1\text{ MHz}$		$T_{VJ} = 25^{\circ}\text{C}$		73	pF

Brake IGBT + Diode				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{CES}	collector emitter voltage	$T_{VJ} = 25^{\circ}\text{C}$				1700	V
V_{GES}	max. DC gate voltage					± 20	V
V_{GEM}	max. transient gate emitter voltage					± 30	V
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$				200	A
I_{C100}		$T_C = 100^{\circ}\text{C}$				135	A
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				935	W
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 150 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$		2,1	2,8	V
			$T_{VJ} = 125^{\circ}\text{C}$		3,2		V
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 4 \text{ mA}; V_{GE} = V_{CE}$	$T_{VJ} = 25^{\circ}\text{C}$	5,5	6,0	6,5	V
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			0,12	mA
			$T_{VJ} = 125^{\circ}\text{C}$		2,3		mA
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20 \text{ V}$				500	nA
$Q_{G(on)}$	total gate charge	$V_{CE} = 900 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 150 \text{ A}$			310		nC
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 900 \text{ V}; I_C = 150 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 10 \Omega$	$T_{VJ} = 125^{\circ}\text{C}$		120		ns
t_r	current rise time				80		ns
$t_{d(off)}$	turn-off delay time				400		ns
t_f	current fall time				150		ns
E_{on}	turn-on energy per pulse				45		mJ
E_{off}	turn-off energy per pulse				50		mJ
RBSOA	reverse bias safe operating area	$V_{GE} = \pm 15 \text{ V}; R_G = 10 \Omega$	$T_{VJ} = 125^{\circ}\text{C}$				
I_{CM}		$V_{CEK} = 1700 \text{ V}$				280	A
SCSOA	short circuit safe operating area	$V_{CEK} = 1700 \text{ V}$					
t_{SC}	short circuit duration	$V_{CE} = 1300 \text{ V}; V_{GE} = \pm 15$	$T_{VJ} = 125^{\circ}\text{C}$			10	μs
I_{SC}	short circuit current	$R_G = 10 \Omega$; non-repetitive			400		A
R_{thJC}	thermal resistance junction to case					0,16	K/W
R_{thCH}	thermal resistance case to heatsink				0,25		K/W
Brake Diode							
V_{RRM}	max. repetitive reverse voltage		$T_{VJ} = 25^{\circ}\text{C}$			1700	V
I_{F25}	forward current		$T_C = 25^{\circ}\text{C}$			145	A
I_{F100}			$T_C = 100^{\circ}\text{C}$			90	A
V_F	forward voltage	$I_F = 100 \text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			2,20	V
			$T_{VJ} = 125^{\circ}\text{C}$		2,00		V
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^{\circ}\text{C}$			tbd	mA
			$T_{VJ} = 125^{\circ}\text{C}$			tbd	mA
Q_{rr}	reverse recovery charge	$V_R = 900 \text{ V}$ $-di_F/dt = 2500 \text{ A}/\mu\text{s}$ $I_F = 100 \text{ A}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$		30		μC
I_{RM}	max. reverse recovery current				60		A
t_{rr}	reverse recovery time				200		ns
E_{rec}	reverse recovery energy				11		mJ
R_{thJC}	thermal resistance junction to case					0,39	K/W
R_{thCH}	thermal resistance case to heatsink				0,62		K/W

Package E2-Pack				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				30	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		125	°C
Weight					176		g
M_D	mounting torque			3		6	Nm
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal		6,0			mm
$d_{Spb/Apb}$		terminal to backside		12,0			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	4300			V
		t = 1 minute		3600			V

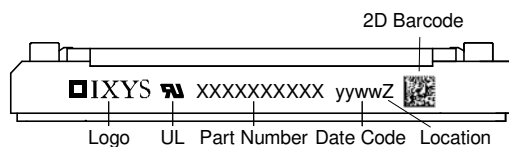

Part description

M = Module
 D = Diode
 N = High Voltage Standard Rectifier
 A = (≥ 2000 V)
 360 = Current Rating [A]
 UB = 3~ Rectifier Bridge + Brake Unit
 2200 = Reverse Voltage [V]
 PT = PressFit-Pin, Thermistor
 ED = E2-Pack
 - = Hyphen
 PC = Phase Change Material

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDNA360UB2200PTED	MDNA360UB2200PTED	Blister	28	515682
Alternative	MDNA360UB2200PTED-PC	MDNA360UB2200PTED	Blister	28	514541

Temperature Sensor NTC


Symbol	Definition	Conditions	min.	typ.	max.	Unit
R_{25}	resistance	$T_{VJ} = 25^\circ$	4,85	5	5,15	k Ω
$B_{25/50}$	temperature coefficient			3375		K


Equivalent Circuits for Simulation

* on die level

$T_{VJ} = 150^\circ\text{C}$

		Rectifier	Brake IGBT +	Brake Diode	
V_0	threshold voltage	0,82	1,1	1,25	V
R_0	slope resistance *	1,5	9,2	8,5	m Ω

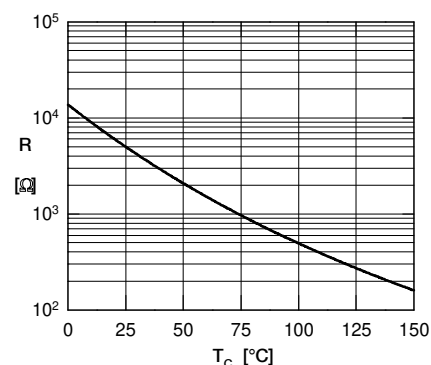


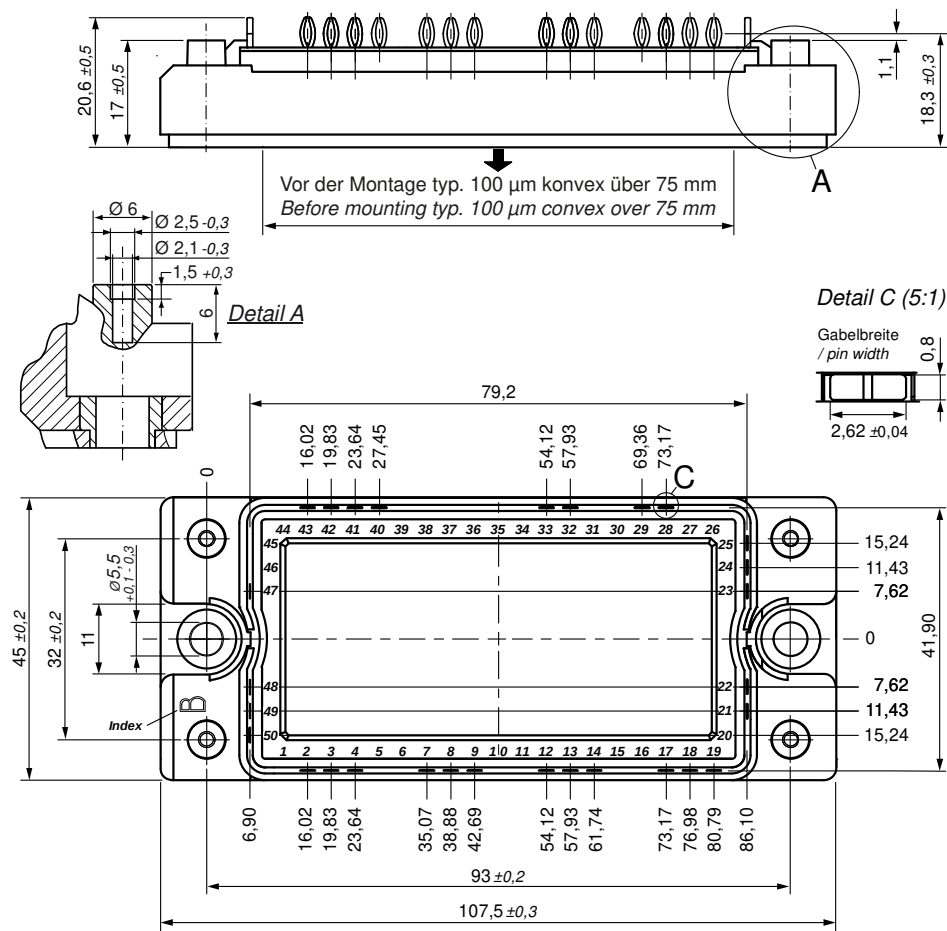Outlines E2-Pack

Bemerkung / Note:

- Nicht tolerierte Maße nach / Measure without tolerances according DIN ISO 2768-T1-m
- PCB-Lochmuster / PCB hole pattern: **see pin position**
- Toleranz Pin-Position und PCB-Lochmuster / Tolerance of pin position and PCB hole pattern: $\oplus 0.1$
- Bohrlochdurchmesser / Diameter of drill: **Ø 2.35 mm**
- Endlochdurchmesser / Diameter of plated holes: **Ø 2.14 - 2.29 mm** (Cu thickness in via typ. 50 µm)
- Beschichtung / Plating: **chem. Sn max. 15 µm**
- Einpresskraft / Insert Force: per terminal with a typ. insert speed of 7 mm/s: **typ. 90 N**
- Weitere Angaben / Further information: www.ixys.com **Application note IXAN0077**
- Montageanleitung / Mounting instruction: www.ixys.com **Application note IXAN0024**

Detail A: PCB-Montage / Mounting on PCB

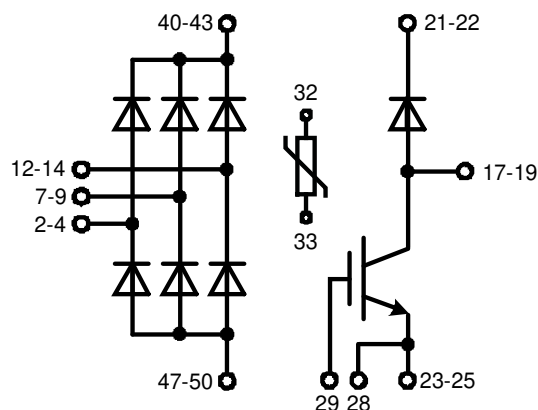- Empfohlene, selbstschneidende Schraube / Recommended, self-tapping screw: **EJOT PT®** (Größe / size: **K25**)
- Max. Schraubenlänge / Max. screw length: **PCB-Dicke / thickness + 6 mm** (max. Lochtiefe / hole depth)
- Empfohlenes Drehmoment / Recommended mounting torque: **1.5 Nm**



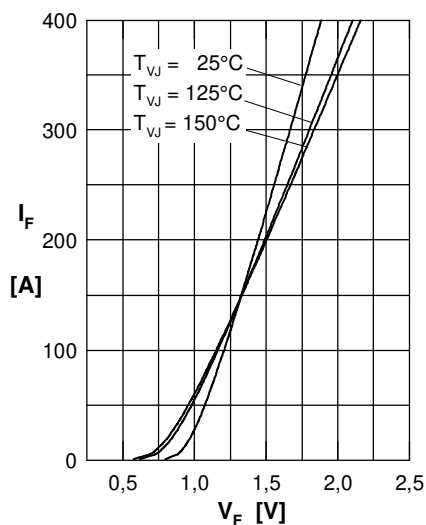
Rectifier


Fig. 1 Forward current versus voltage drop per diode

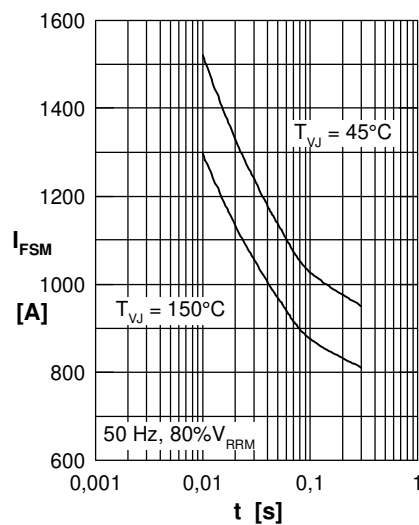


Fig. 2 Surge overload current vs. time per diode

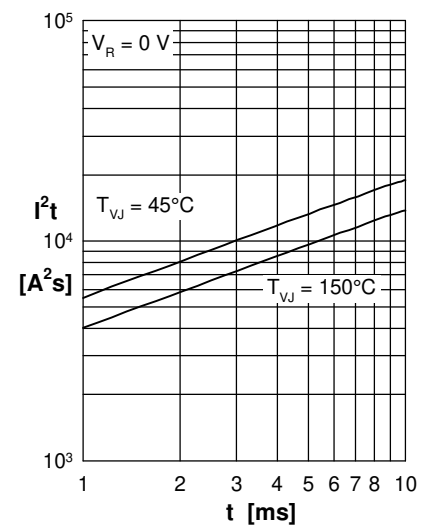
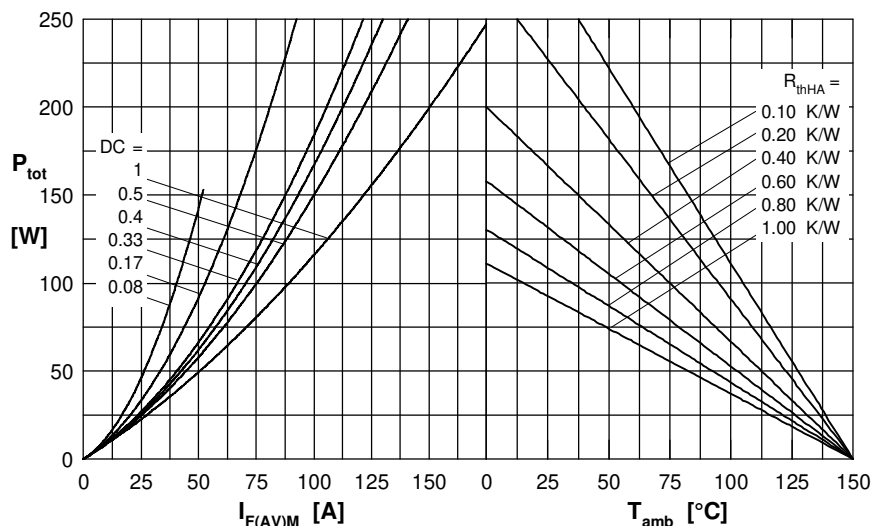

 Fig. 3 I^2t versus time per diode


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

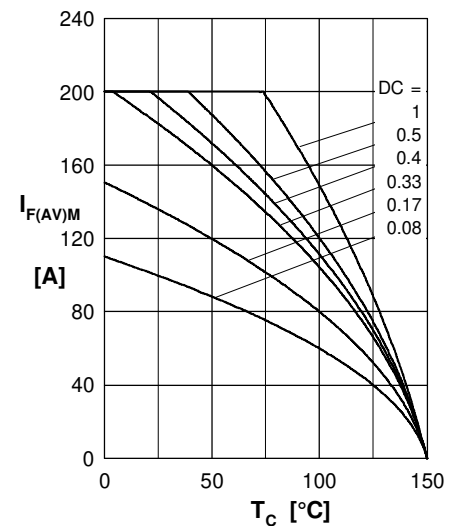


Fig. 5 Max. forward current vs. case temperature per diode

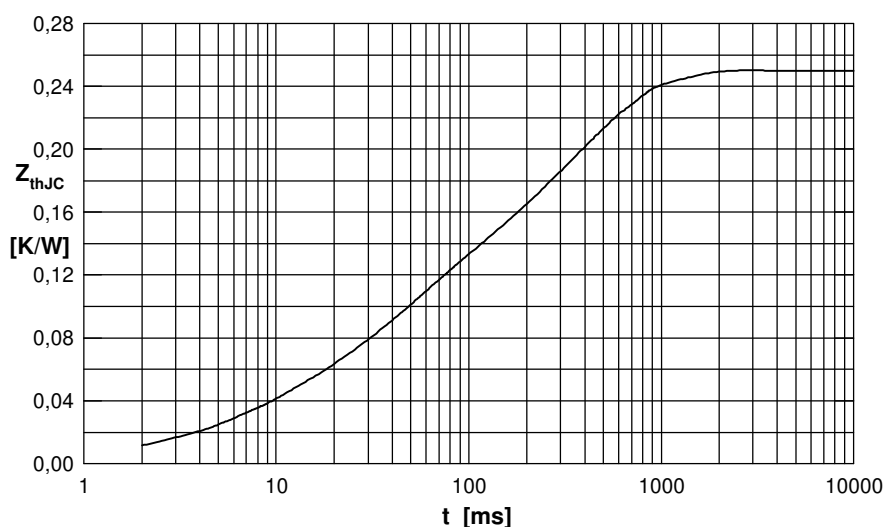


Fig. 6 Transient thermal impedance junction to case vs. time per diode

 Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.020	0.006
2	0.003	0.007
3	0.080	0.037
4	0.147	0.360

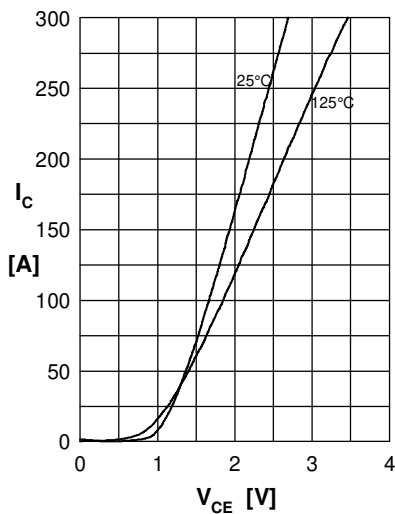
Brake IGBT + Diode


Fig. 1 Typ. output characteristics IGBT

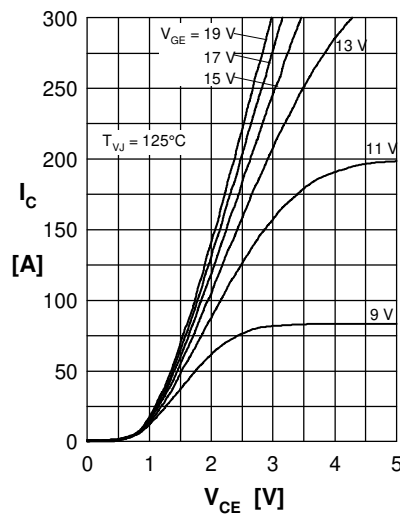


Fig. 2 Typ. output characteristics IGBT

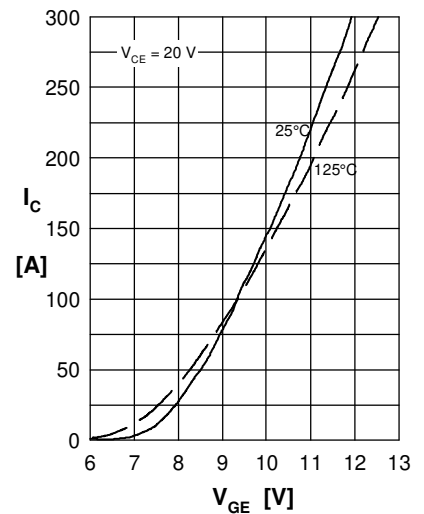


Fig. 3 Typ. transfer charact. IGBT

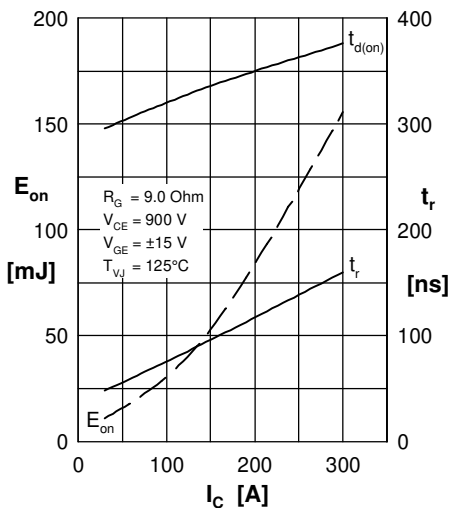


Fig. 4 Typ. turn-on energy & switch. times vs. collector current

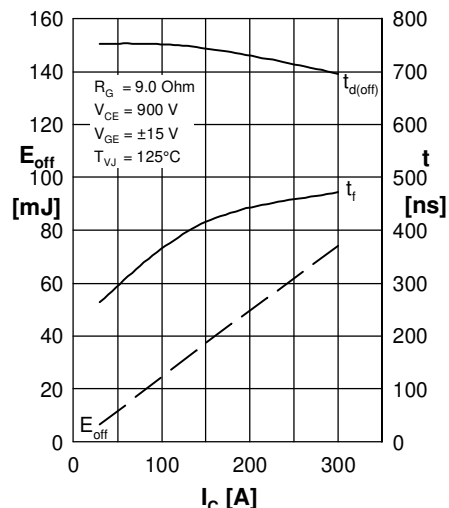


Fig. 5 Typ. turn-off energy & switch. times vs. collector current

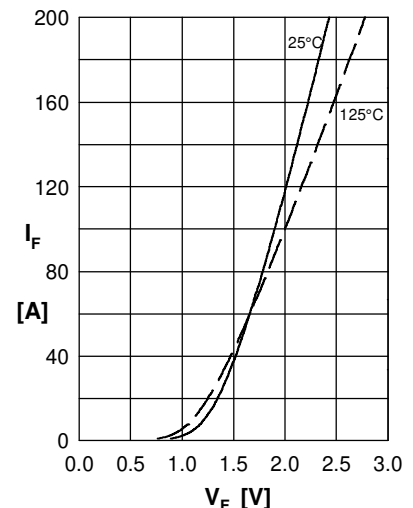


Fig. 6 Typ. forward characteristics Diode

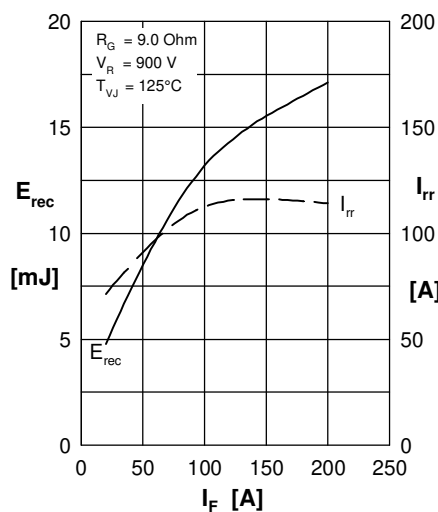


Fig. 7 Typ. reverse recovery characteristics Diode

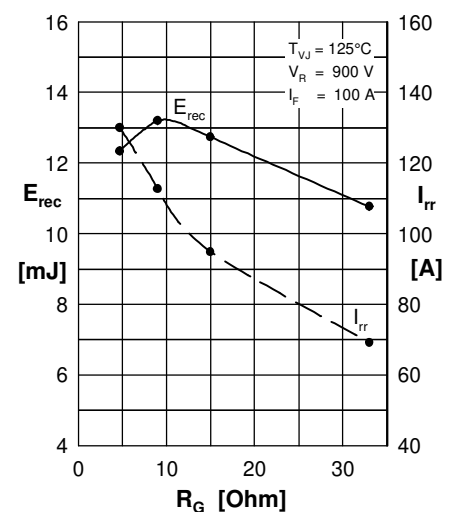


Fig. 8 Typ. reverse recovery characteristics Diode

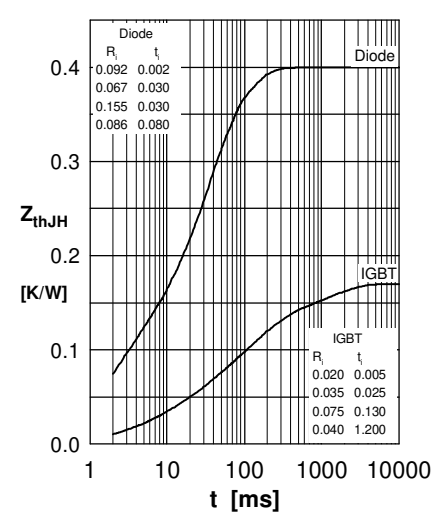


Fig. 9 Typ. transient thermal resistance junction to heatsink