


MINI® FL1 SERIES

58V PCB FUSE HOLDER

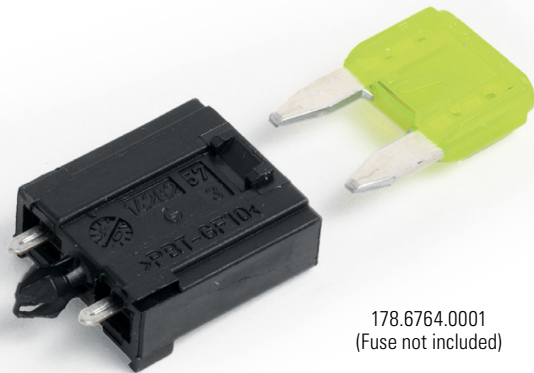

Specifications

Current Rating Continuous:	22 Amps
Current Rating Max:	30 Amps
Fuse Type:	MINI® 32V DC, MINI® 58V DC
Flammability Rating:	UL 94 V-0
Input Terminals:	MINI® Fuse Blades
Mounting Method:	PCB Mount
Max Voltage Rating:	58V DC

Applications

- Automotive PCB Fusing
- Accessory, Sensor, or Vehicle Control Circuit Protection

Description

The MINI® FL1 Series 58V PCB Fuse Holder makes it simple to add a single MINI® blade fuse up to 30 amps (sold separately) to a printed circuit board (PCB). If you need circuit protection for multiple circuits, nearly any number of MINI® FL1 Series fuse holders can be mounted in a row.

As a MINI® fuse holder for PCB applications, it features a heat-resistant, black, thermoplastic body with a UL 94 V-0 flammability rating. This makes it ideal for holding an automotive fuse that protects accessory, sensor, and vehicle control circuits. Its tin-plated copper alloy fuse holder terminals fit into a 7.62mm pitch.

Features And Benefits

- Compatible with MINI® blade fuses up to 30 amps (sold separately)
- Made for installing a MINI® blade fuse on a printed circuit board (PCB)
- Multiple MINI® FL1 Series fuse holders can be mounted in a row
- Heat-resistant, black, glass-fiber-reinforced PBT body with a UL 94 V-0 flammability rating is ideal for automotive applications
- Tin-plated copper alloy terminals fit into a 7.62mm pitch

Web Resources

Download 2D print, installation guide and technical resources at: littelfuse.com/MINIFL1

Ordering Information

PART NUMBER	DESCRIPTION	CURRENT RATING MAX	FUSE TYPE	MOUNTING METHOD	MAX VOLTAGE RATING
178.6764.0001	Holder For FL1 (MINI) PCB – 100 Pieces	30 Amps	MINI	PCB Mount	58V DC