


Current Sensor

RCM14-01 System

Dc Residual Current Monitor, Mode 3

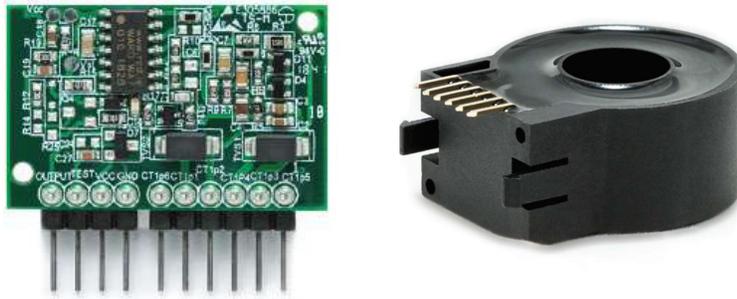

Description

The RCM14-01 System is a residual current monitor designed to detect dc residual currents in Mode 3 EV charging systems, where such currents may occur under fault conditions.

The system includes a 14 mm aperture current transformer (CT) and a sensor PCB, intended for direct mounting onto an OEM's printed circuit board.

It detects 6 mA dc residual currents in dc, single-phase, or three-phase installations, and functions equivalently to the RCM14-01.

Fully compliant with the detection requirements of IEC 62955.

Features & Benefits

FEATURES	BENEFITS
Operates from a 12-24 V dc supply	Compatibility with common control voltages and reduces OEM inventory complexity
External Test Facility	Ability to verify to correct operation of the device
"Fault" Signal Output	Offloads fault detection from the main control system, simplifying and reducing development time

Applications

- Mode 3 EV Charging Stations

Ordering Information

CATALOG #	DESCRIPTION
90149	RCM14-01 System

Current Sensor

RCM14-01 System

Specifications

Relevant Product Standard	IEC 62955
Rated Residual Operating Current - (I_{Δn})	6 mA dc
Rated Non-operating Residual Current - (I_{Δno})	3 mA dc
"Response Time to residual current fault (time between appearance of fault to output going high)"	According to IEC 62955
Dc Supply Voltage (V_{cc}):	12-24 V dc ± 10%
Supply current (no fault present @ 24 V)	4 mA maximum
Supply current (fault current >200 mA @ 24 V)	12.5 mA maximum
Rated Load Current (single or 3 phase)	125 A maximum (the absolute maximum temperature of the conductors through the CT must not exceed 105°C)
Test Current Limit on Test Function for 12 to 24 V externally applied to Test Pin	0.8 mA DC minimum (12 V) 1.6 mA DC minimum (24 V)
Fault Signal Output	Active High Open Drain
Drain Current	100 mA maximum
Pull up Voltage	+26.4 V dc maximum
Environmental Operating Conditions	-40 °C to +85 °C
Absolute Temperature	
Weight	35 g
Recommended screw type	Self Tapping Screw M2.5 × 6 (2 pcs.)
Surge Current Withstand	3000 A

Environmental Conditions

PARAMETER	MIN.	TYP.	MAX.	UNIT
Operating temperature	-40	-	85	°C
Storage temperature	-40	-	85	°C
Altitude	-	-	3000	m

Electrical Specifications

PARAMETER	MIN.	TYP.	MAX.	UNIT
Supply voltage	10.8	12-24	26.4	V
Supply current, no fault current ¹	-	-	3	mA
Supply current, peak >200 mA dc fault current ¹	-	-	9	mA
Dc trip level	-	24	56	mA
Ac 60Hz trip level	15	-	20	mA ac
Output drain current	-	-	100	mA
Output pull up voltage	-	-	24	V
Test input current @ 12 V dc	-	24	-	mA
Rated load current, single / 3 phase ²	-	-	125	A

1. Output external pull up current not included.

2. At rated current, the absolute maximum temperature of the conductors through the CT must not exceed 105°C.


Current Sensor

RCM14-01 System

Timing Specification

PARAMETER	MIN.	TYP.	MAX.	UNIT
Output response time @ 6 mA dc, $t_{r(6mA)}$	-	-	1000	ms
Output response time @ 60 mA dc, $t_{r(60mA)}$	-	-	100	ms
Output response time @ 200 mA, $t_{r(200mA)}$	-	-	70	ms
Output Reset time, t_{reset}^3	-	-	2500	ms
Output response time with Test, t_{rT}	-	-	1000	ms
Output Reset time with Test, t_{resetT}^3	-	-	1000	ms


3. Time taken for fault out to return from Hi-Z state after fault removed.

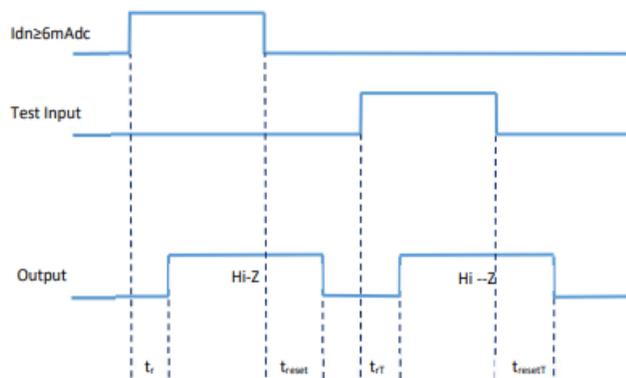

Other

PARAMETER	MIN	TYP.	MAX	UNIT
Overvoltage category		III		-


Product Dimensions (Millimeters)

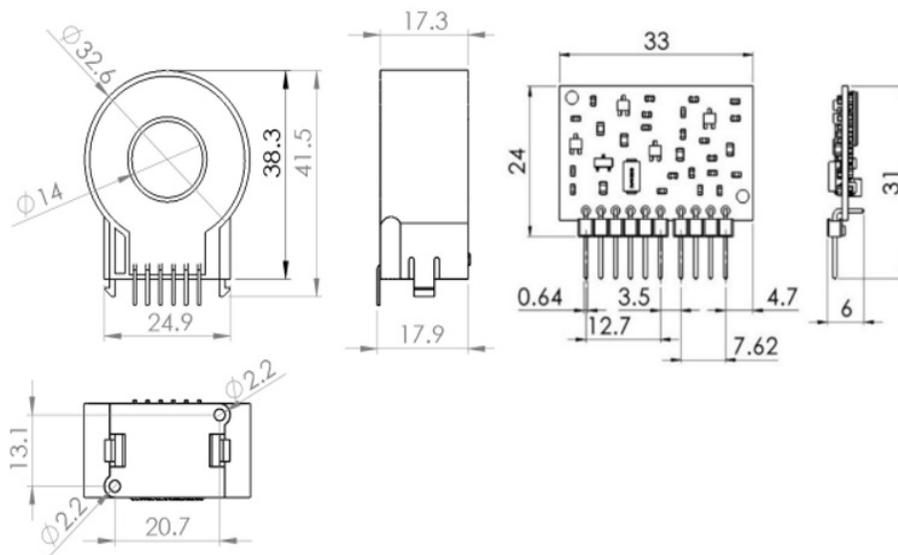

Current Sensor

RCM14-01 System

PCB Layout Requirements

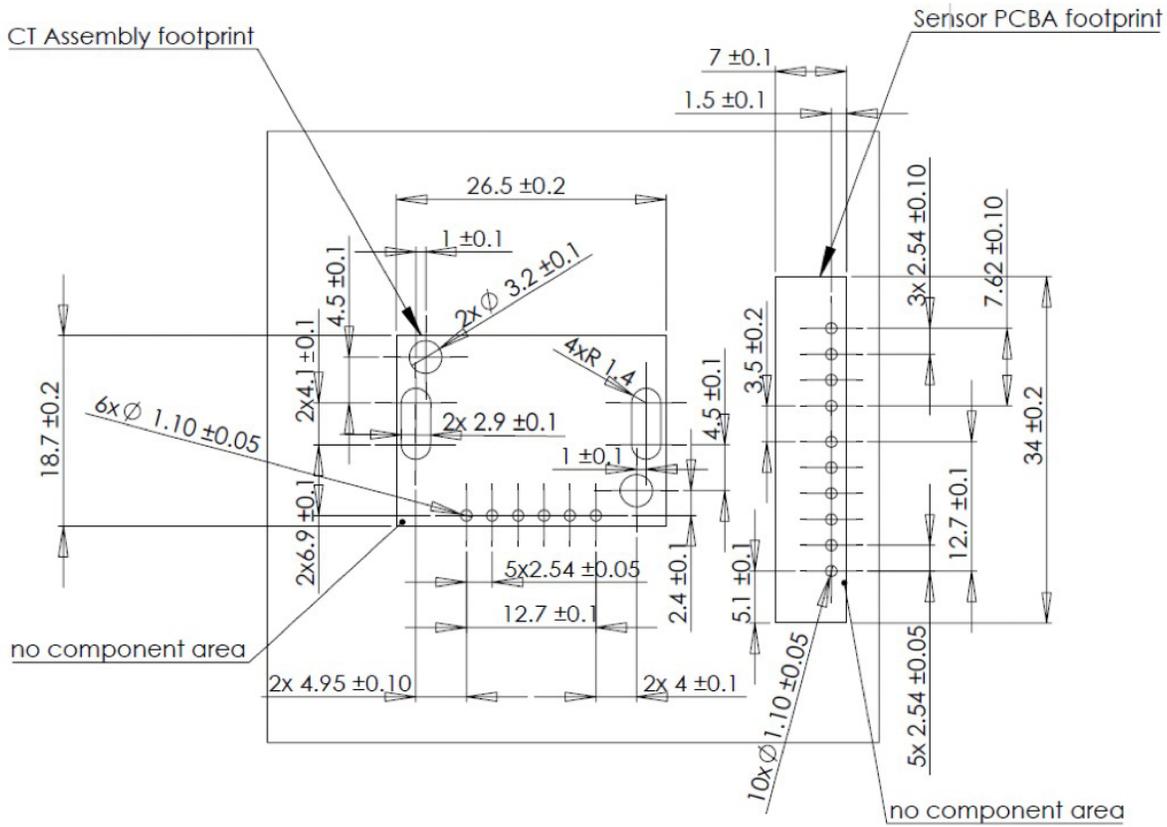

Handling Instructions

Care should be taken to ensure the correct connection of the RCM14-01 System. Miswiring the product may cause permanent damage.

ESD Caution

PCBA contains ESD (electrostatic discharge) sensitive devices. Damage may occur on devices subjected to high-energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Current Sensor RCM14-01 System

Wiring Diagram

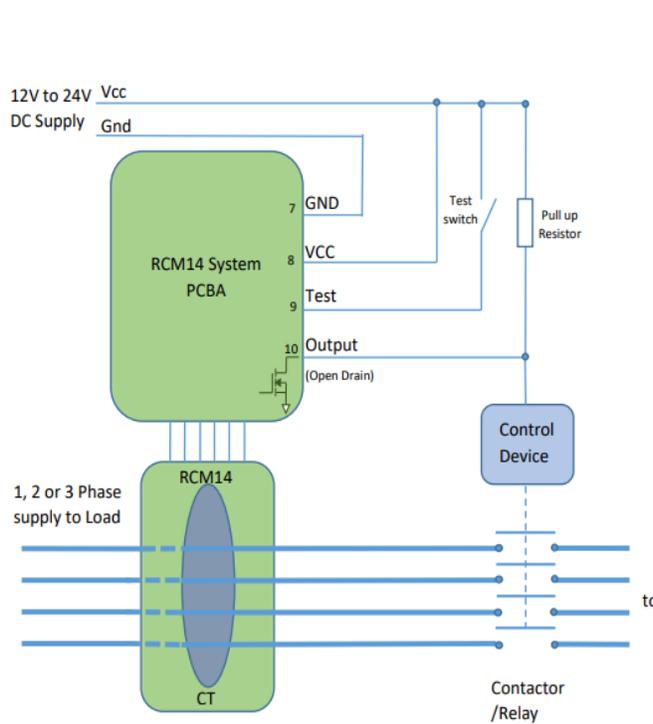


Figure 1: Wiring Diagram

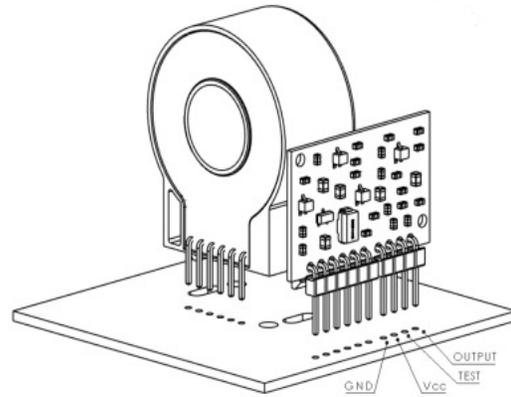


Figure 2(a): PCBA Connections

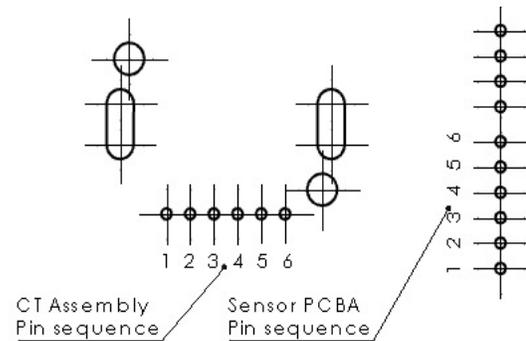


Figure 2(b): PCBA to CT Connection Order

PIN NO.	NAME	DESCRIPTION
1-6	CT Connections	6 connections should be made between RCM14 System PCBA and CT assembly in the order shown in figure 2(b)
7	GND	Ground, 0 V
8	Vcc	12 V to 24 V dc
9	Test	Used to verify correct device operation. Apply Vcc to this pin to activate the test function. When active, Pin 10 (Fault Out) will go HIGH if the test is successful. Once Vcc is removed, Fault Out returns to LOW. This pin should remain disconnected when the test function is not in use. The test switch shown in Figure 1 is illustrative only—Vcc can also be applied by the control device
10	Fault Signal Output	Open-drain output; requires connection to an external pull-up resistor to the desired signal level (e.g., Vcc). *LOW State (low impedance): Indicates no fault and test function inactive. *HIGH State (high impedance): Triggered when ac or dc residual current exceeds the trip threshold, or when the test function is active. *Reset Behavior: Fault Out returns to LOW once the fault is cleared and the test function is inactive. To prevent contactor or relay chatter, do not connect this pin directly to such devices. It is recommended that the control system latches the signal in hardware or software to ensure reliable fault handling.

Current Sensor

RCM14-01 System

Standards Conformity & Certifications

Product Safety Certifications

Products tested, compliant and certified to the following standards that states the requirements for electrical products to ensure they are safe for consumers to use.

CERTIFICATION BODY MARK	CERTIFICATION BODY NAME	CERTIFICATION DESCRIPTION	STANDARDS COVERED BY THE CERTIFICATION
	IEC	Conformity with the European safety, health, and environmental protection requirements for residual direct current detecting device (RDC-DD) to be used for mode 3 charging of electric vehicles.	IEC 62955

Environmental Compliance

Products comply to the following environmental standard requirements for electrical products to ensure they are safe for consumers to use.

-	STANDARD NAME	STANDARD DESCRIPTION	STANDARD NUMBER
	RoHS	Conformity with the European Restriction of Hazardous Substances in electrical and electronic products	European Union RoHS 2 Directive 2011/65/EU
	REACH	Conformity with the Registration, Evaluation, Authorization and Restriction of Chemicals regulation to ensure safe use of chemicals	European Directive 1907/2006

Intended Use

The RCM14-01 System is designed to be integrated with the appropriate switching device, e.g., relay or contactor, to provide the 6 mA dc detection requirements defined by IEC 62955 for use in Mode 3 electric vehicle charging.

No special start up procedures or calibration is required for the RCM14-01 System. Once powered the system is ready to detect the dc requirements of IEC62955.

Related Products

RCM14-01	6 mA dc Detection to IEC62955, 14 mm CT Aperture
RCM14-03	6 mA dc / 30 mA ac Detection to IEC 62752, 14 mm CT Aperture
RCM14-04 System	56 mA dc / 20 mA ac Detection to UL2231-2, 14 mm CT Aperture
RCM14-03 System	6 mA dc / 30 mA ac Detection to IEC 62752, 14 mm CT Aperture

Disclaimer Notice – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.