


# 75712-04 HIGH-AMP ROTARY SWITCH

For Forward/Reverse Applications

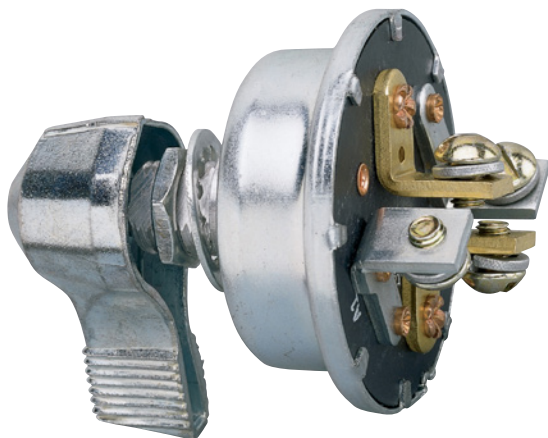

## Description

Specially designed to operate tarps and winches on vehicles, and windlasses on boats.

A 50A DPDT switch with heavy duty components that delivers continued reliability. Constructed with heavy gauge (3/32" thick) terminals and silver-laminated contacts to resist arcing over a long working life.

## Features and Benefits

- Three positions: Momentary On - Off - Momentary On, the switch is ideal for activating forward or reverse motion of a motor.
- With a tarping system the motion would be: Cover/Uncover
- With a hoist or tailgate: Up/Down
- With a windlass: Raise Anchor/Lower Anchor.

## Specifications Overview

<b>Rating:</b>	50A at 12V DC
<b>Material:</b>	Plated Steel Case
<b>Dimensions:</b>	2.09" (53.08mm) Diameter
<b>Terminals:</b>	4 screw, No.10-32 x .375" (9.52mm) screws, with lockwashers.
<b>Contacts:</b>	Silver-laminated
<b>Mounting stem:</b>	1/2" -20 thread
<b>Action:</b>	(Left) Reverse On A1 & B1, A2 & B2 terminals, (Right) Forward On A1 & B2, A2 & B1.

## Web Resources

Download technical resources at: [littelfuse.com/75712-04](http://littelfuse.com/75712-04)

## Ordering Information

PART NUMBER	DESCRIPTION
75712-04	High-Amp Rotary Switch

## Other Reversing Switches

PART NUMBER	DESCRIPTION	NOTES
55046	25A Forward & Reverse Toggle Switch	DPDT. Momentary On - Off - Momentary On. Nickel-plated brass mounting stem 15/32" -32 thread fits panels up to 1/4" (11.90mm) thick. Nickel-plated brass handle, 11/16" (17.46mm) long, with nickel-plated brass facenut and hexnut. 4 blade terminals. Silver contacts. 25A at 12V DC.
90005-01	15A Forward & Reverse Switch	DPDT. Momentary On - Off - Momentary On. (Left) Reverse On 1&4, 2&3, (Right) Forward On 1&3, 2&4. Long mounting stem: 1/2" -20 thread 1 1/4" long. Silver contacts. Four screw terminals. 15A at 12V DC.
90005-03	15A Forward & Reverse Switch with Keys	DPDT. Momentary On - Off - Momentary On. (Left) Reverse On 1&4, 2&3, (Right) Forward On 1&3, 2&4. Mounting stem: 13/16" -24 thread. Silver contacts. Four screw terminals. Coded tumbler lock with two keys, O-ring sealed at the stem. 15A at 12V DC.
90005-04	15A Forward & Reverse Switch	DPDT. Momentary On - Off - Momentary On. (Left) Reverse On 1&4, 2&3, (Right) Forward On 1&3, 2&4. Mounting stem: 1/2" -20 thread. Silver contacts. Four screw terminals. 15A at 12V DC.



Visit [Littelfuse.com](http://Littelfuse.com) for the most up-to-date product information. Littelfuse products are designed for specific applications and should not be used for any purpose (including, without limitation, automotive applications) not expressly set forth in applicable Littelfuse product documentation. Warranties granted by Littelfuse shall be deemed void for products used for any purpose not expressly set forth in applicable Littelfuse product documentation. Littelfuse shall not be liable for any claims or damages arising out of products used in applications not expressly intended by Littelfuse as set forth in applicable Littelfuse product documentation.

Datasheet Replaces Hotfeed Number D-590